INCH-POUND

MS35758D
30 August 2012
SUPERSEDING
MS35758C
23 January 2008


DETAIL SPECIFICATION SHEET

CUPS, GREASE, MANUAL FEED

Inactive for new design after 5 April 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for this product described herein shall consist of this specification sheet and MIL-C-1213.

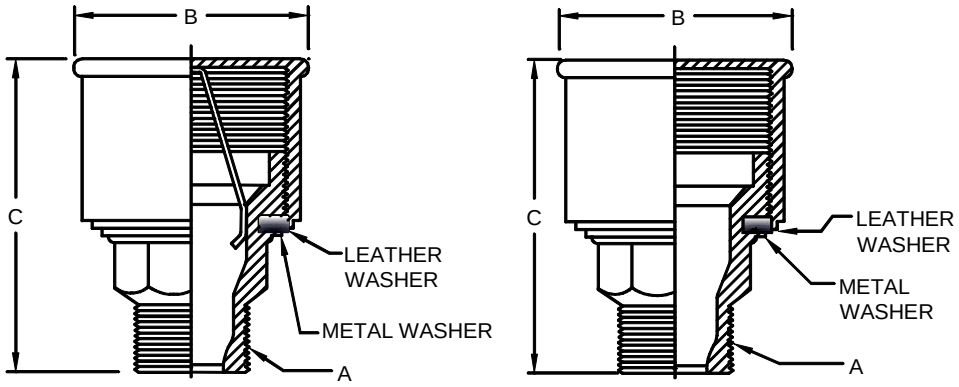

OPTIONAL DESIGN (WITHOUT RATCHET)

Dash numbers			Grease capacity ounce	A Thread	B max OD inch (mm)	C max Overall length inch (mm)
Steel		Brass				
Uncoated	Plated	Uncoated				
-1	-4	-7	.25	.125 -27 NPT	1.125 (28.58)	1.625 (41.28)
-2	-5	-8	.50	.125 -27 NPT	1.250 (31.75)	1.875 (47.63)
-3	-6	-9	1.0	.250 -18 NPT	1.875 (47.63)	2.500 (63.50)
-----	-----	-10	2.0	.375 -18 NPT	2.250 (57.15)	2.875 (73.03)
-----	-----	-11	3.5	.500 -14 NPT	2.750 (69.85)	1.250 (31.75)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, the tolerance for 3 place decimals is ± .005 inch (0.13 mm).
4. Threads shall be in accordance with FED-STD-H28/7, FED-STD-H28/8, ASME B1.20.1 and ASME B1.20.3.
5. The illustration is for identification only and is not intended to restrict design or shapes not dimensioned.

FIGURE 1. Cups, grease, manual feed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Manual feed grease cups shall be specified on figure 1 and tables I and II.

Materials shall be, specified in table I.

TABLE I. Materials.

Code	Material	Form	Specification	Alloy
B	B Brass	Bars	ASTM B16/B16M ASTM B36/B36M ASTM B121/B121M ASTM B124/B124M	260, 268, or 360
		Castings	ASTM B61 ASTM B62 ASTM B148 ASTM B176 ASTM B271 ASTM B369 ASTM B427 ASTM B505/B505M ASTM B584 ASTM B763 ASTM B770 ASTM B806 SAE AMS4842 SAE AMS4845 SAE AMS4855 SAE AMS4860 SAE AMS4862 SAE AMS4890	As applicable
C	Low carbon steel	Bars and forgings	SAE-AIR4127	In accordance with, any standard composition.
S	Stainless Steel (CRES)	N/A	SAE AMS5659, SAE AMS5862 or alloy 15-5 PH, ASTM A564/A564M type XM-12 or UNS S15500 or SAE AMS5665	As applicable

Spring materials.

Spring for steel cup shall be steel in accordance with ASTM A229/A229M or ASTM A227/A227M, class 2.

Spring for brass cup shall be brass in accordance with ASTM B159/B159M.

Leather washer.

The leather shall be made from cattle hides. The leather shall be tanned with chromium salts (mineral-tanned) without the use of vegetable tanning materials. No degreasing shall be employed after the normal tanning process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

Leather shall be treated with a fungicidal agent in accordance with MIL-DTL-32068 to render the material fungus-resistant.

Plating finish designators for dash -4, -5, and -6 only shall be in accordance with table II.

TABLE II. Plating finish identification codes. 1/

PIN code plating finish	Material	Plating finish
C	Steel	Cadmium plating in accordance with SAE AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2, 2/
F	Steel	NAVAIR trivalent chromium pretreatment (TCP) in accordance with MIL-DTL-5541, type II, class 1a.
H	Steel	Zinc phosphate finish in accordance with MIL-DTL-16232 type Z, class1. 3/
J	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5
N	Steel	Zinc plating in accordance with ASTM B633, type VI, Fe/Zn 5,
P	Steel	Aluminum-nickel in accordance with ASTM F1136/F1136M, grade 3, NC.
V	Steel	Zinc-nickel in accordance with SAE AMS2417, type 1
S	CRES	Passivate in accordance with SAE AMS2700, type 6 or 7. 4/


1/ Finished product shall be shall be capable of withstanding minimum of 96 hours salt spray.
2/ Embitterment test need not be run.
3/ Hexavalent chromium free.
4/ If finish code is the same as material code, then omit finish code.

Trivalent wrenchability.

This term is used to evaluate the ability of the finish to withstand abrasion from excessive amount of wrenching. Where wrenchability is poor, the need to touch-up the finish is needed. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE AMS2451/5 and brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE AMS2451/9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): (The PIN covers the complete item with nuts and sleeves.)

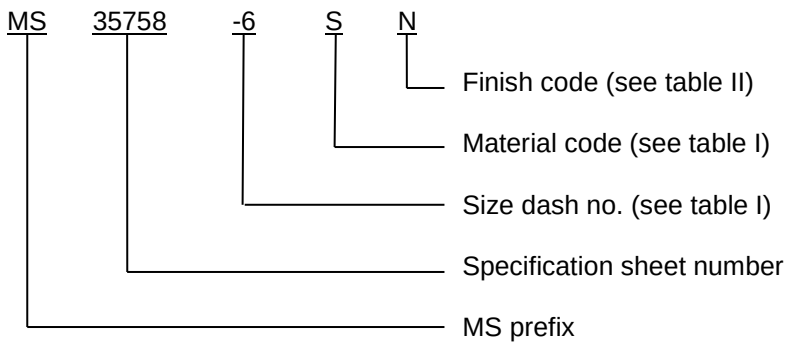

Guidance on the use of Alternative Plating that is less hazardous or nonhazardous on environment. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit and function requirements of their application.

Changes from previous issue. The margins of this standard are marked with vertical lines to indicate modifications generated by this change. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-C-1213, this document references the following:

FED-STD-H28/7
FED-STD-H28/8
MIL-DTL-5541
MIL-DTL-16232
MIL-DTL-32068
ASTM A564/A564M
ASME B1.20.1
ASME B1.20.3
ASTM B16/B16M
ASTM B36/B36M
ASTM B121/B121M
ASTM B124/B124M
ASTM A229/A229M
ASTM B61
ASTM B62
ASTM B148
ASTM B159/B159M
ASTM B176
ASTM A227/A227M
ASTM B271
ASTM B369
ASTM B427
ASTM B505/B505M
ASTM B584
ASTM B633
ASTM B695
ASTM B763
ASTM B770
ASTM B806
ASTM F1136/F1136M
SAE AIR4127
SAE AMS-C-81562
SAE-AMS-QQ-P-416
SAE AMS2417
SAE AMS2700
SAE AMS4842
SAE AMS4845
SAE AMS4855
SAE AMS4860
SAE AMS4862
SAE AMS4890
SAE AMS5659
SAE AMS5665
SAE AMS5862
SAE AMS2451/5
SAE AMS2451/9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA-CC

(Project 4730-2012-034)

Review activities:
Army - AT
Navy – AS, MC
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.