FED. SUP CLASS
4030

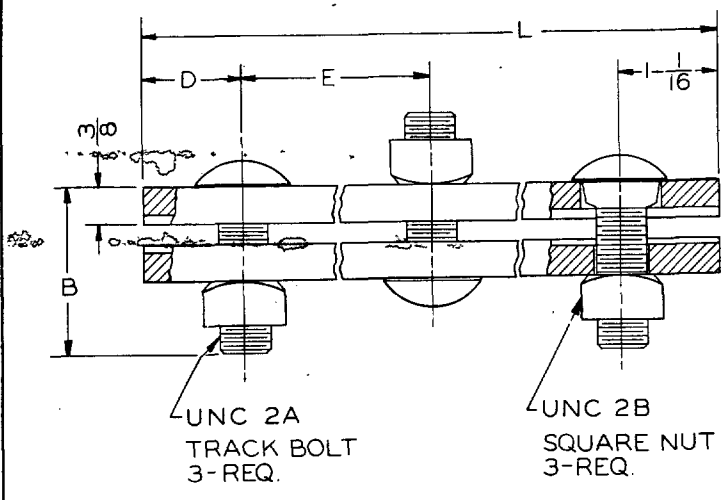

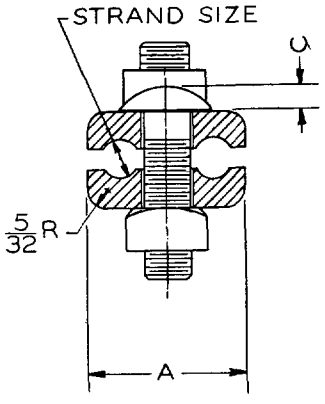

(B)

DASH NO.	NO. BOLTS	A	B ±1/8	C MAX	D	E	STRAND SIZE	BOLT SIZE	L MAX
-1	2	1 9/16	1 5/8	9/32	1	1 3/8	1/4 TO 7/16	1/2-13	3 3/8
-2	3	1 9/16	1 5/8	9/32	1 1/16	2 1/32	1/4 TO 7/16	1/2-13	6 3/16
-3	3	1 9/16	1 5/8	9/32			1/4 TO 7/16	1/2-13	4
-4	3	1 21/32	1 3/4	3/4	1 1/16	2 1/32	5/16 TO 1/2	5/8-11	6 3/16
-5	3	2 1/8	1 3/4	3/4	1 1/16	2 1/32	3/8 TO 5/8	5/8-11	6 3/16
-6	4	1 21/32					5/16 TO 1/2	5/8-11	8

NOTES:

1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
2. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
3. (A1) MATERIALS AND FINISH SHALL BE IN ACCORDANCE WITH EDISON ELECTRIC INSTITUTE SPECIFICATION TDJ-23.
4. ALL SCREW THREADS SHALL BE UNC-2 PER NATIONAL BUREAU OF STANDARDS PUBLICATION H-28. THREADS OF NUTS SHALL NOT BE GALVANIZED.

ALL DIMENSIONS IN INCHES

P.A.	EL	TITLE	MILITARY STANDARD
Other Cust	YD 82	CLAMP, GUY (POLE LINE)	MS 16791
PROCUREMENT SPECIFICATION MIL-H-55053		SUPERSEDES:	

4030-0050

☆ U.S. GOVERNMENT PRINTING OFFICE: 1967—301—514/2699

APPROVED 18JULY58 REVISED (A2) 10 August 1967 (B) 20 November 1967

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on information in the current DODISS(PSC listing).
ARMY: MSC EL+ NAVY: MSC YD+ AIR FORCE: 82+ DEFENCE SUPPLY AGENCY: 13/

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:00Z
Check the source to verify that this is the current version before use.