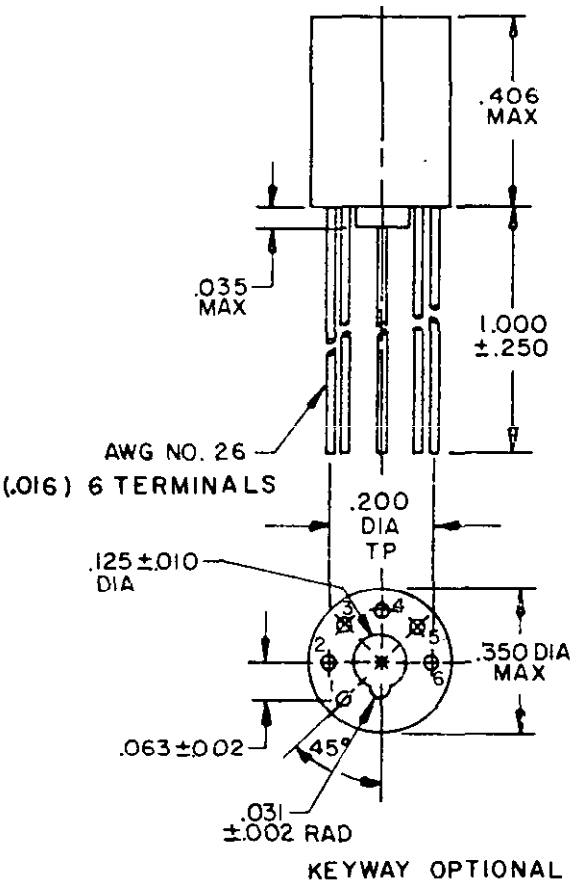

CIRCUIT DIAGRAM AND MARKING

FREQUENCY RANGE: 400 Hz TO 100 kHz
POWER LEVEL: 500 mW

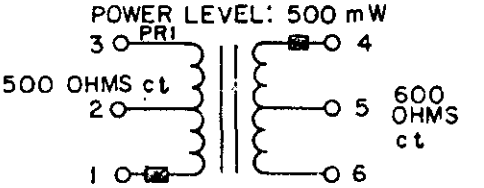

ALTITUDE: 150,000 FT
WORKING VOLTAGE: 49V (PEAK)

INCHES	MM	INCHES	MM
.002	.05	.125	3.18
.005	.13	.200	5.08
.010	.25	.250	6.35
.016	.41	.350	8.89
.031	.79	.406	10.31
.035	.89	1.000	25.40
.063	1.60		

Ⓑ CANCELED AFTER 14 AUG 79
USE MIL-T-27/103

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Terminals are spaced the same as "TO-76" transistors and micrologic elements.
4. Referenced document shall be of the issue in effect on date of invitation for bids.
5. This standard takes precedence over document referenced herein.
6. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
7. The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be 85°C.

Ⓑ denotes changes

P.A. AF-85 Other Cust	International Interest	TITLE: TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TYPE TF5R21ZZ	MILITARY STANDARD MS21394(USAF)
Procurement Specification MIL-T-27		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

5950-F188-5

APPROVED 1 JUN 1973 REVISED Ⓐ 14 Nov 77 Ⓑ 14 AUG 79

This military standard is approved for use by AFALD/PTS, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

Reviewer activities: Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:38Z
Check the source to verify that this is the current version before use.