FED SUP CLASS
5935

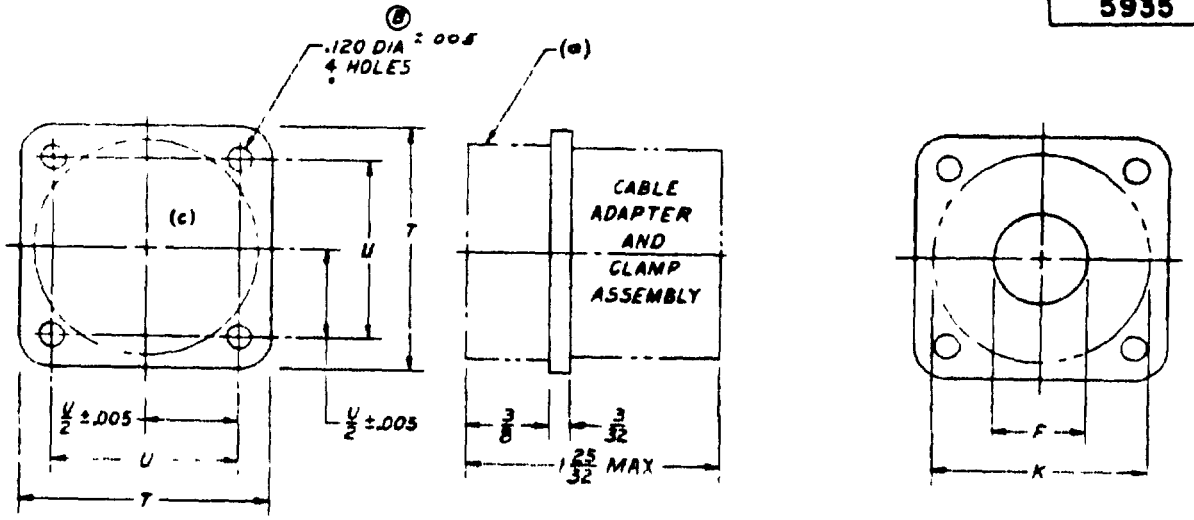

(a) SIZE	F MINIMUM CABLE ENTRY INSIDE DIA	K MAXIMUM ACROSS CLAMP AND ADAPTER DIA.	T ± 1/32	U ±.005
15	25/64	1 9/32	1 1/8	.843
15L			1 23/64	.078
19	33/64	(B) 1 3/8	1 1/4	.872
19L			1 1/2	1.219
21	41/64	1 17/32	1 11/32	1.062
21L			1 5/16	1.297

(B)

(a) MATING DIMENSIONS, MALE THREAD, IN ACCORDANCE WITH
(1) MS24243M FOR PIN CONTACTS, "M" IN PART NUMBER, OR
(2) MS24243S FOR SOCKET CONTACTS, "S" IN PART NUMBER

(b) SHELL SIZE AS SPECIFIED IN CONNECTOR PART NUMBER.

(c) INSERT ARRANGEMENT IN ACCORDANCE WITH MS24242. INSERT ARRANGEMENT NUMBER CORRESPONDING TO SHELL SIZE AND AS SPECIFIED IN CONNECTOR PART NUMBER. ALTERNATE INSERT POSITION IF APPLICABLE, AS SPECIFIED IN CONNECTOR PART NUMBER. EXAMPLE OF CONNECTOR PART NUMBERS: SEE MIL-C-25955.

(B)

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCES DECIMALS ± .002, FRACTIONS ± 1/64, ANGLES ± 1°.

CONTACTS SUPPLIED WITH BUT NOT INSTALLED IN CONNECTORS.

APPROVED 9 JAN 58 REVISED (A) 27 MAY 58 (B) 18 OCT 60

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT
	A - N - AF -

MILITARY STANDARD
CONNECTOR-RECEPTACLE, ELECTRICAL, WALL MOUNTED

MS24234
(USAF)

PREPARATION | SUPERSEDES
MIL-C-25955

SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.