FED. SUP CLASS
8135

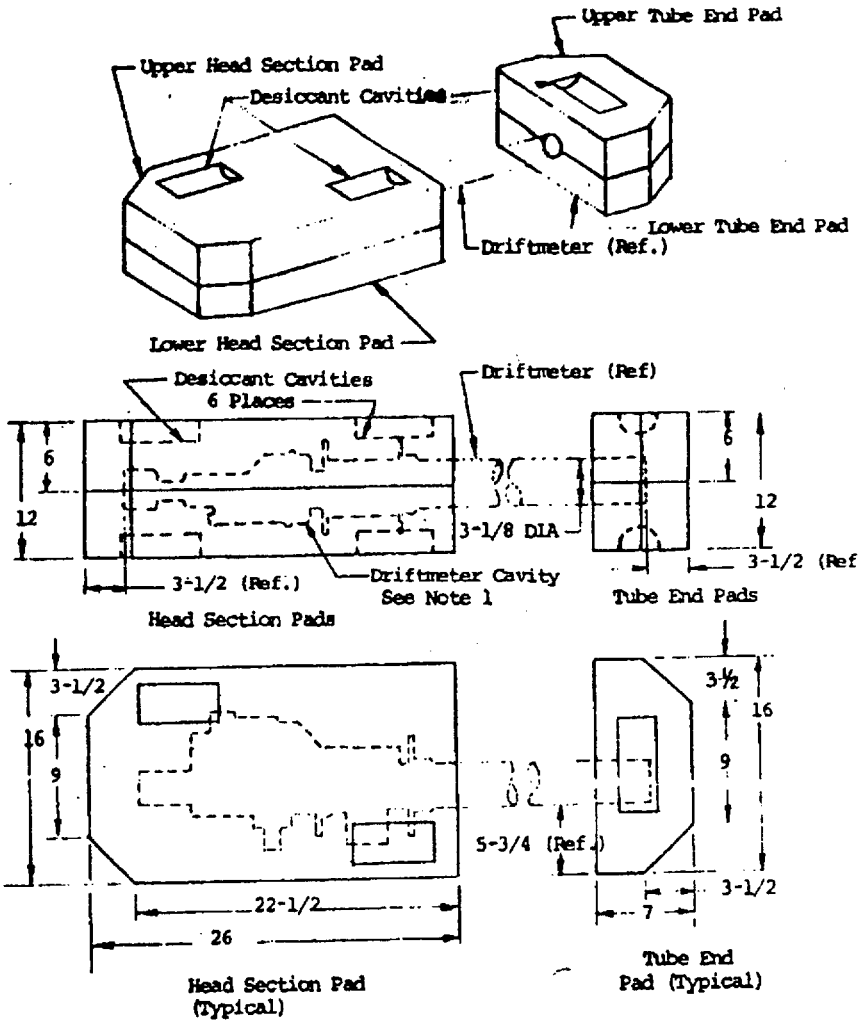

NOTES: (A)

1. Cavity to conform to the configuration of the driftmeter head section (MS28012) Ref.
2. Desiccant cavities to be located to avoid interference with driftmeter cavity.
3. Dimensions in inches unless otherwise specified.
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitations for bid.

(A) Redrawn (B) CANCELLED - No superseding standard.

APPROVED 4 Sept 87 REVISED (A) 1 DEC 70 (B) 7 APR 87

P.A.	TITLE	MILITARY STANDARD
Air Force - 69 Other Cust	Packaging Cushion Pad B-3 & B-6A Driftmeter	MS24485(USAF)
Procurement Specification NONE	SUPERSEDES: MS 24486 (USAF)	SHEET 1 OF 1

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-433-693/3206

DD FORM 1 SEP 65 672 (Limited coordination) EDITION OF 1 SEP 57 MAY BE USED.

This standard has been approved by the Packaging Evaluation Agency (PA), Department of the Air Force, and is mandatory for use by that activity. All other military activities are required to employ this standard when suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.