FED. SUP CLASS
6145

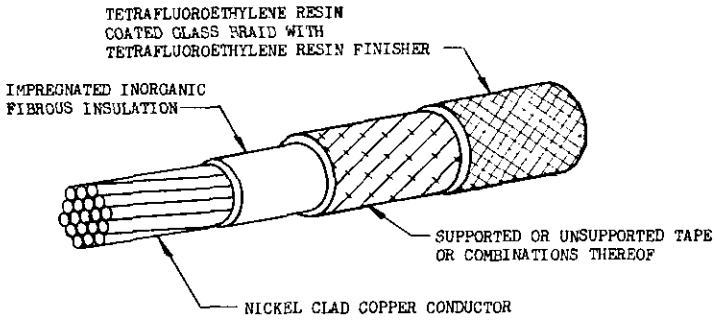

PERFORMANCE DETAILS

WIRE SIZE	ABRASION TEST				FLAWS TEST	BEND TEST AND COLD BEND	
	RESISTANCE MINIMUM INCHES OF TAPE	TENSION LOAD LB	WEIGHT SUPPORT BRACKET	WEIGHT LB	MIN AC VOLTAGE 60 CYCLE RMS FINISHED WIRE	MANDREL DIAMETER IN INCHES	TEST LOAD (LB)
22	30	1	A	1	2500	6	2
20							
18	33						
16	44	2	B	3		8	3
14	20						
12	22						
10	30					10	5
8	36					12	
6	42		C	4.25		14	10
4	40					16	
2	46					20	15
1	52					22	
0						24	20
00	58						25
000	64						30
0000	70						

FINISHED WIRE CONSTRUCTION

DASH NO.	WIRE SIZE	RESISTANCE AT 20°C (68°F) OHMS/1000 FT MAX	NO. OF STRANDS	DIAMETER IN INCHES		WEIGHT LB/1000 FT MAX
-22	22	23.7	19	.108	±.008	10
-20	20	14.6		.117		12
-18	18	9.14		.127		15
-16	16	6.85		.137	±.010	19
-14	14	4.32		.160		25
-12	12	2.68		.175		35
-10	10	1.59	49	.220		55
-8	8	.936	133	.268	±.012	85
-6	6	.591		.330		127
-4	4	.375		.395		192
-2	2	.241	665	.472		291
-1	1	.196	817	.515	±.018	347
-0	0	.153	1045	.555		415
-00	00	.120	1330	.615	±.020	520
-000	000	.096	1672	.680		648
-0000	0000	.077	2109	.750		793

© CANCELED AFTER 29 MARCH 1972. USE MIL-W-25038/1.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 5 Mar 62 — REVISED (A) 9 Apr 63 — (B) 19 May 65 — (C) 29 Mar 72

Review activities: USAF - 11 Navy - AS

This standard has been approved by the Air Sys. (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - AS	TITLE WIRE, ELECTRICAL - HIGH TEMPERATURE AND FIRE RESISTANT	MILITARY STANDARD MS27125
PROCUREMENT SPECIFICATION MIL-W-25038	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited Coordination Copy)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:16Z
Check this source to verify that this is the current version before use.