MS9816

FED. SUP CLASS 5306

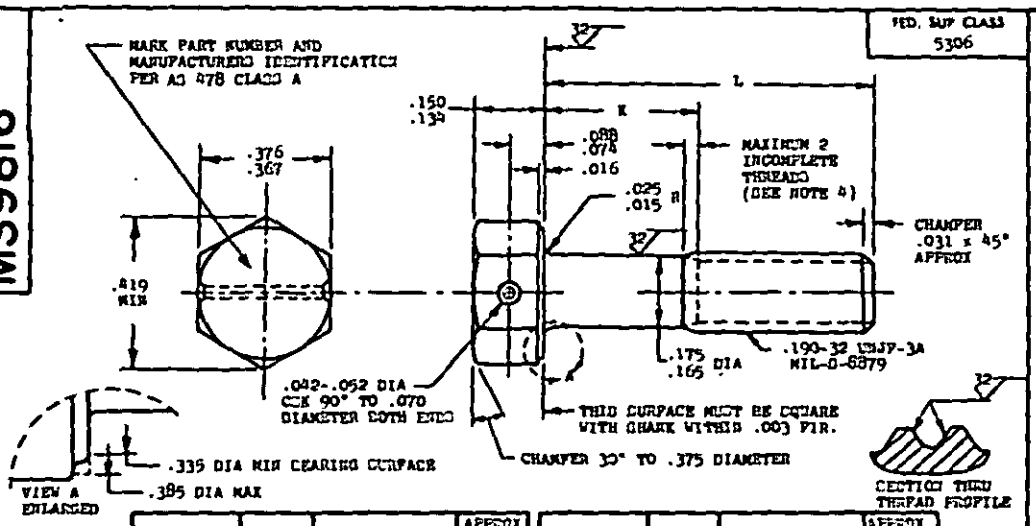

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9816-03	.312	.072- .092	.70
MS9816-04	.375	.072- .092	.74
MS9816-05	.438	.072- .092	.78
MS9816-06	.500	.072- .092	.82
MS9816-07	.562	.072- .092	.86
MS9816-08	.625	.072- .092	.90
MS9816-09	.688	.072- .092	.94
MS9816-10	.750	.072- .120	.98
MS9816-11	.812	.122- .182	1.02
MS9816-12	.875	.185- .245	1.06
MS9816-13	.938	.248- .308	1.10
MS9816-14	1.000	.310- .370	1.15
MS9816-15	1.062	.372- .432	1.19
MS9816-16	1.125	.435- .495	1.23
MS9816-17	1.188	.498- .558	1.27
MS9816-18	1.250	.560- .620	1.31
MS9816-19	1.312	.622- .682	1.35
MS9816-20	1.375	.685- .745	1.39
MS9816-21	1.438	.748- .808	1.42
MS9816-22	1.500	.810- .870	1.46
MS9816-23	1.562	.872- .932	1.50
MS9816-24	1.625	.935- .995	1.54
MS9816-25	1.688	.998-1.058	1.58
MS9816-26	1.750	1.060-1.120	1.62
MS9816-27	1.812	1.122-1.182	1.66
MS9816-28	1.875	1.185-1.245	1.70
MS9816-29	1.938	1.248-1.308	1.74
MS9816-30	2.000	1.310-1.370	1.78

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9816-31	2.125	1.435-1.495	1.86
MS9816-32	2.250	1.560-1.620	1.94
MS9816-33	2.375	1.685-1.745	2.02
MS9816-34	2.500	1.810-1.870	2.10
MS9816-35	2.625	1.935-1.995	2.18
MS9816-36	2.750	2.060-2.120	2.26
MS9816-37	2.875	2.185-2.245	2.34
MS9816-38	3.000	2.310-2.370	2.42
MS9816-39	3.125	2.435-2.495	2.50
MS9816-40	3.250	2.560-2.620	2.58
MS9816-41	3.375	2.685-2.745	2.66
MS9816-42	3.500	2.810-2.870	2.74
MS9816-43	3.625	2.935-2.995	2.82
MS9816-44	3.750	3.060-3.120	2.90
MS9816-45	3.875	3.185-3.245	2.98

1. SHANK SHALL BE STRAIGHT WITHIN .003 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IS RELATIVE TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IS RELATIVE TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .011 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

Revise activities. USAF-82

APPROVED 11 MAR 70 REVISED

This military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for all new engineering and design applications and for revisions that should be made from this document.

P.A. USAF-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY-AV NAVY-AS	ADOC AIR STD 17/2	BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, PD SHANK, AMS 5643, .190-32 UNJF-3A	MS9816
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-096/5-5396

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.