NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/244
30 June 1997
SUPERSEDING
MIL-M-3946/66A
10 December 1993

DETAIL SPECIFICATION SHEET

MEDAL, KUWAIT LIBERATION, KINGDOM OF SAUDI ARABIA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3943 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

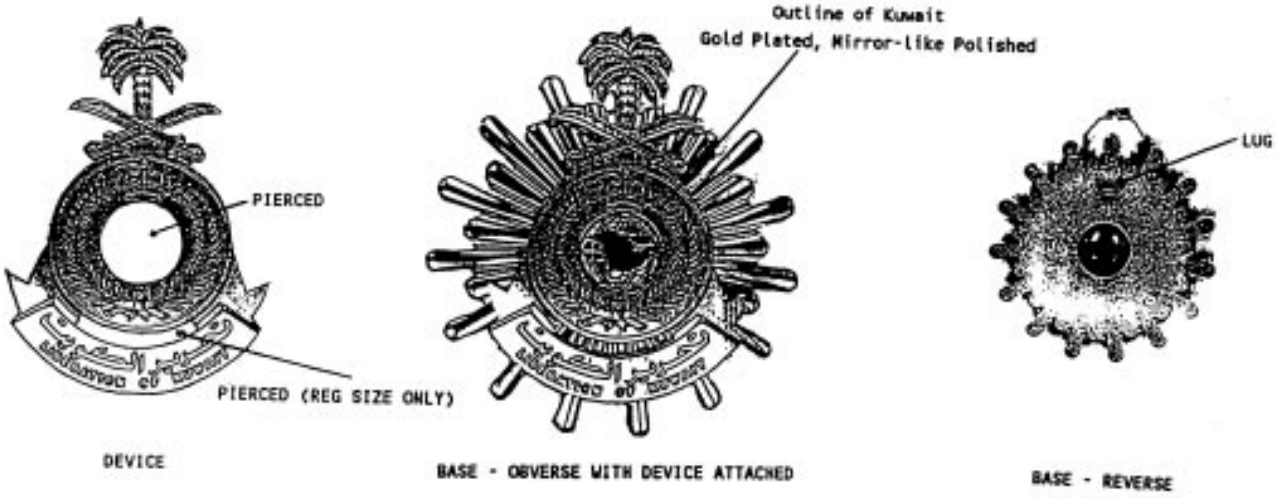

MATERIAL: Red Brass

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:
BASE:
OBVERSE: Nickel Plated, Mirror-like Polished and shall match TIOH metal finish chip Number 16 (the center of the base with the outline of Kuwait is Gold Plated, Mirror-like Polished and shall match TIOH metal finish chip Number 6).

REVERSE: Stippled, Nickel Plated, Matte Finish and shall match TIOH metal finish chip Number 17 (Stipple is not required in the center forced area).

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:41Z
Check the source to verify that this is the current version before use.

DEVICE: Gold Plated, Matte Finish and shall match TIOH metal finish chip Number 7.

DIMENSIONS:
BASE:
DIAMETER:
-1: 1 25/32 inches (4.52 cm)
-2: 7/8 inch (2.22 cm) (REF)
THICKNESS:
-1: 0.095 ± 0.005 inch (0.241 ± 0.012 cm)
-2: 0.060 ± 0.005 inch (0.152 ± 0.012 cm)

DEVICE:
HEIGHT (at highest point):
-1: 1 27/32 inches (4.68 cm)
-2: 29/32 inch (2.30 cm) (REF)
WIDTH (At widest point):
-1: 1 1/4 inch (3.18 cm)
-2: 5/8 inch (1.59 cm)(REF)
THICKNESS:
-1: 0.050 ± 0.005 inch (0.127 ± 0.012 cm)
-2: 0.025 ± 0.005 inch (0.063 ± 0.012 cm)

DAPPING: The base and device shall be dapped as indicated on the horizontal plane.
-1: 1/8 inch ± 1/32 inch (0.32 ± 0.08 cm)
-2: 1/16 inch ± 1/32 inch (0.16 ± 0.08 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A forcer shall be used to bring up the design of the globe.

3. The device shall be pierced as indicated.

4. The device shall be riveted or soft soldered to the base in the location shown.

5. The lug shall be riveted or hard soldered to the base in the area indicated.

6. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/365.

7. The ribbon attachment for the service ribbon shall conform to MIL-DTL-41819/39.

8. Government furnished hubs for the regular size medal are not available; however, ribbon for the pendant drape shall conform to MIL-DTL-11589/365. Pendant ribbon length of the regular size medal shall be adjusted so the overall length (including pendant) is 3-11/16 inches ± 1/32 inch (9.37 cm ± 0.08 cm).

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians: Preparing activity:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:41Z
Check the source to verify that this is the current version before use.

Army - IH
Air Force - 45
Navy - NU

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Army - IH

(Project No. 8455-0897)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:41Z
Check the source to verify that this is the current version before use.