INCH-POUND


MIL-DTL-3943/244B
21 July 2016
SUPERSEDING
MIL-DTL-3943/244A
5 January 2015

DETAIL SPECIFICATION SHEET

MEDAL, KUWAIT LIBERATION, KINGDOM OF SAUDI ARABIA

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

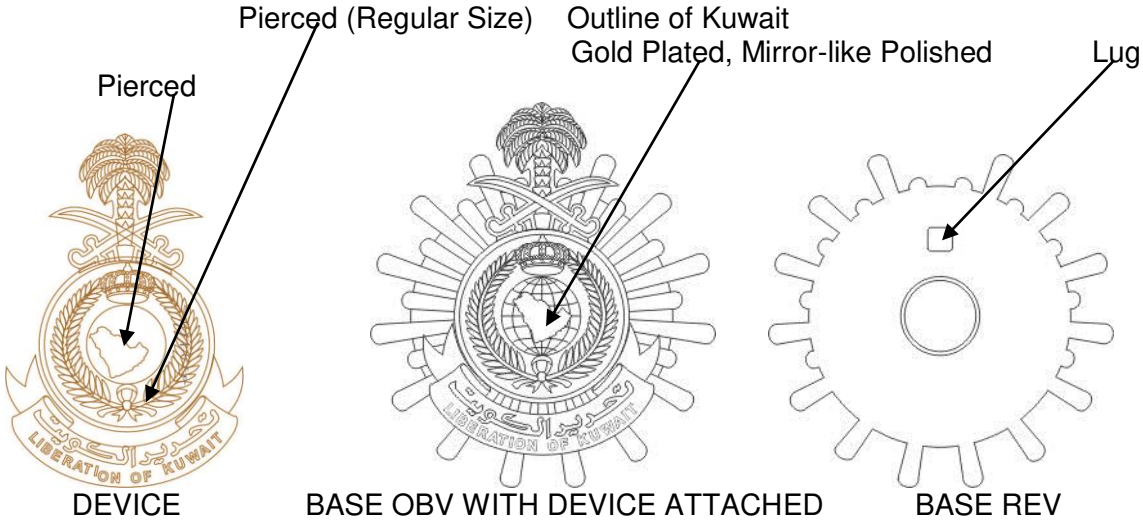

DEVICE BASE OBV WITH DEVICE ATTACHED BASE REV

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL (-1 and -2): Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE:
OBVERSE: (-1 and -2): Nickel Plated, Mirror-like Polished shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16 (The center of the base with the outlet of Kuwait is 24k Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
REVERSE: Stippled, Nickel Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 17 (Stipple is not required in the center force area).
DEVICE: Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:41Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
DIAMETER:
-1: 1-25/32 inches (REF)
-2: 7/8 inch (REF)
THICKNESS:
-1: 0.095 inch ± 0.005 inch
-2: 0.060 inch ± 0.005 inch
DEVICE:
HEIGHT (At highest point):
- 1: 2-27/32 inches (REF)
-2: 29/32 inches (REF)
WIDTH (At widest point):
-1: 1-1/4 inches (REF)
-2: 5/8 inch (REF)
THICKNESS:
-1: 0.050 inch ± 0.005 inch
-2: 0.025 inch ± 0.005 inch

DECORATION SET: The decoration set shall consist of a regular size medal and a service ribbon. The presentation case shall be as specified by the procuring agency.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A forcer shall be used to bring up the design of the globe.

3. The device shall be pierced as indicated.

4. The device shall be riveted or soft soldered to the base in the location shown.

5. The lug shall be riveted or hard soldered to the base in the area indicated.

6. The specification slash sheet for the ribbon for the pendant drape is MIL-DTL-11589/468

7. The specification slash sheet for the ribbon attachment for the service ribbon is MIL-DTL-41819/3

8. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:41Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - MC
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - CG1
DLA - CT

(Project No. 8455-2016-641)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:41Z
Check the source to verify that this is the current version before use.