METRIC


DOD-P-63464/3A
21 April 1982
SUPERSEDING
DOD-63464/3
7 December 1979

MILITARY SPECIFICATION SHEET

PIN, GROOVED, HEADLESS-LONGITUDINAL STRAIGHT GROOVE, CARBON STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pins described herein shall consist of this specification and the latest issue of DOD-P-63464.

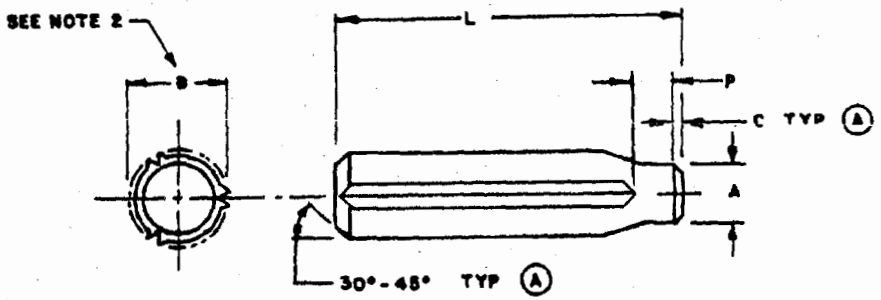

NOTES:

1. All dimensions are in millimeters.
2. Diameter "B" is the expanded diameter as measured with a "GO" and "NOT GO" ring gage.

(A) FIGURE 1. PIN, GROOVED, HEADLESS-LONGITUDINAL STRAIGHT GROOVE.

(A) denotes changes

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Carbon steel, cold-drawn, 1100 or 1200 series.

2. Protective finish: Cadmium plate pins up to and including 3 mm diameter. Zinc coated pins 4 mm and larger diameter.

3. Part number: Consists of the letter "D", the basic number of this specification sheet and a dash number taken from table I.

Example: D63464/3-01516

- 01516 — length in mm
- 01 — diameter in 10ths of mm
- 3 — specification sheet number

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. (A)

Nom size	1.5	2	2.5	3	4	5	6	8	10	12
A Dia max	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00
A Dia min	1.47	1.97	2.47	2.97	3.95	4.95	5.95	7.95	9.95	11.95
Recm hole size max	1.54	2.05	2.55	3.05	4.06	5.07	6.08	8.10	10.12	12.14
Recm hole size min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00
C Chamfer max length	0.4				0.8			1.2		
P Pilot ±0.25 length	0.8				1.5			2.5		

L ±0.25 Length	Dash no	B Dia +0.05 -0.00	Dash no	B Dia +0.05 -0.00	Dash no	B Dia +0.05	Dash no	B Dia +0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05
6.00	01506	1.63	02006	2.15																
8.00	01508	1.63	02008	2.15	02508	2.70	03008	3.25												
10.00	01510	1.63	02010	2.15	02510	2.70	03010	3.25												
12.00	01512	1.63	02012	2.15	02512	2.70	03012	3.25	04012	4.25	05012	5.30								
16.00	01516	1.63	02016	2.15	02516	2.70	03016	3.25	04016	4.25	05016	5.30	06016	6.30	08016	8.40				
20.00			02020	2.10	02520	2.65	03020	3.20	04020	4.25	05020	5.30	06020	6.30	08020	8.40	10020	10.45		
26.00							03026	3.20	04026	4.20	05026	5.25	06026	6.30	08026	8.40	10025	10.45	12026	12.50
30.00							03030	3.20	04030	4.20	05030	5.25	06030	6.30	08030	8.40	10030	10.45	12030	12.50
40.00											05040	5.25	06040	6.25	08040	8.35	10040	10.45	12040	12.50
50.00													06050	6.25	08050	8.35	10050	10.40	12050	12.45
60.00															08060	8.35	10060	10.40	12060	12.45
70.00															08070	8.35	10070	10.40	12070	12.45

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:5
Check the source to verify that this is the current version before

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AT, EA
DLA - IS
NSA - NS

User activities:
Army - ME, MI
Navy - MC, YD

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5315-0362)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use