


Form Approved
OMB No. 0704-0188

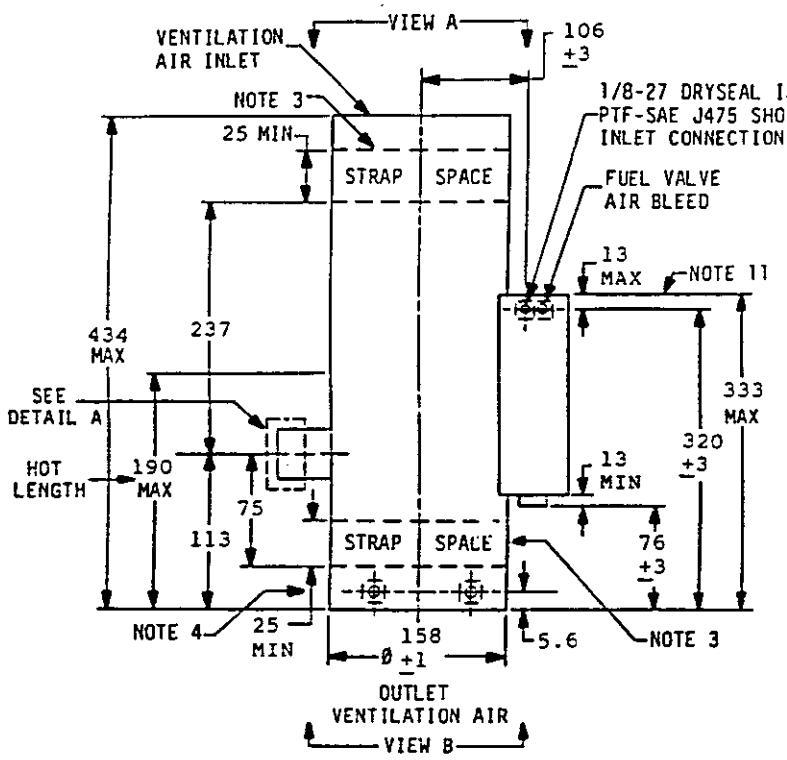


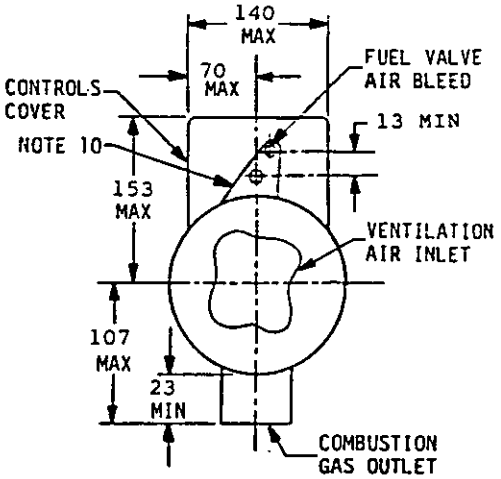

VIEW A

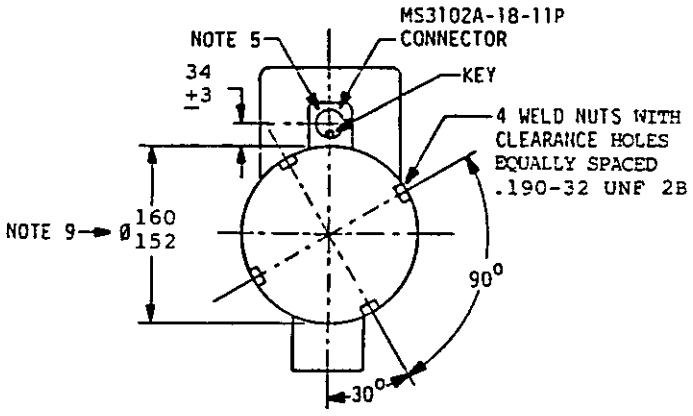

VIEW B

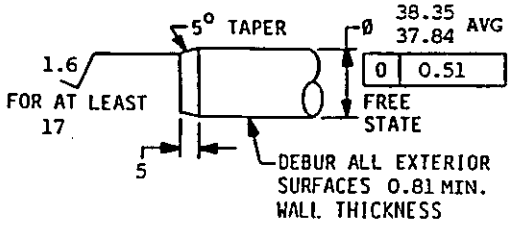

DETAIL A

METRIC

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-H-62550(AT)

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY- AT NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 2540-A033/3	MILITARY SPECIFICATION SHEET TITLE: HEATER ASSEMBLY, COMBUSTION, VEHICULAR COMPARTMENT, 8.8 KW, SINGLE AIR TYPE (METRIC)	SPECIFICATION SHEET NUMBER: MIL-H-62550/3(AT) 12 December 1991 SUPERSEDING: AMSC-NA FSC- 2540

Source: https://assist.dla.mil - Downloaded: 2026-10-23T01:48Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

NOTES:

1. PERSONNEL HEATER MUST BE IN ACCORDANCE WITH SPECIFICATION MIL-H-62550 TYPE I. CLASS I.
2. UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN MILLIMETERS (MM). TOLERANCES ARE ± 1.50 ON DECIMALS. AND ± 1° ON ANGULAR DIMENSIONS.
3. NO FASTENERS OR RAISED SHARP EDGES ARE ALLOWED IN THE STRAP SPACE AREAS. THE DIAMETER FOR THESE AREAS SHALL BE 160 MM.
4. A DIAMETER OF 158 ± 1 MM SHALL BE MAINTAINED FOR 18 MM MIN STARTING FROM THE HEATER OUTLET.
5. THE CONNECTOR 13 MM CENTER MAY BE WITHIN 32 MM TO THE CONTROLS COVER CENTERLINE. IF IT IS PERPENDICULAR DISTANCE FROM THE HEATER'S SHELL REMAINS AT 33 MM.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BID.
7. INTERPRET ACCORDING TO ANSI Y14.5-1982.
8. THIS IS A CRITICAL ITEM.
9. DIAMETER EXCLUDING AREAS SPECIFIED BY NOTES 3 AND 4.
10. OPENING IN CONTROLS COVER MUST BE AT LEAST 25 MM WIDE AND ALLOW NOT LESS THAN 13 MM ACCESS SPACE ABOUT THE CENTERS OF THE FUEL INLET AND AIR BLEED.
11. AS LONG AS THE REMAINING DRAWING REQUIREMENTS ARE MET. FUEL INLET AND AIR BLEED VALVE ARE NOT REQUIRED TO BE WITHIN THE CONTROLS COVER.

METRIC

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-H-62550(AT)

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY-AT NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 2540-A033/3	MILITARY SPECIFICATION SHEET TITLE: HEATER ASSEMBLY, COMBUSTION, VEHICULAR COMPARTMENT, 8.8 KW, SINGLE AIR TYPE (METRIC)	SPECIFICATION SHEET NUMBER: MIL-H-62550/3(AT) 12 DECEMBER 1991 SUPERSEDING: AMSC-NA FSC-2540
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 2

Source: https://assist.dla.mil - Downloaded: 2026-10-23T01:48Z
Check the source to verify that this is the current version before use.