MILITARY SPECIFICATION SHEET

SWITCH CAPSULE, DRY REED TYPE, SPST (NO), 1 AMPERE

The complete requirements for procuring the switch capsule described herein shall consist of this document and the latest issue of Specification MIL-S-55433.

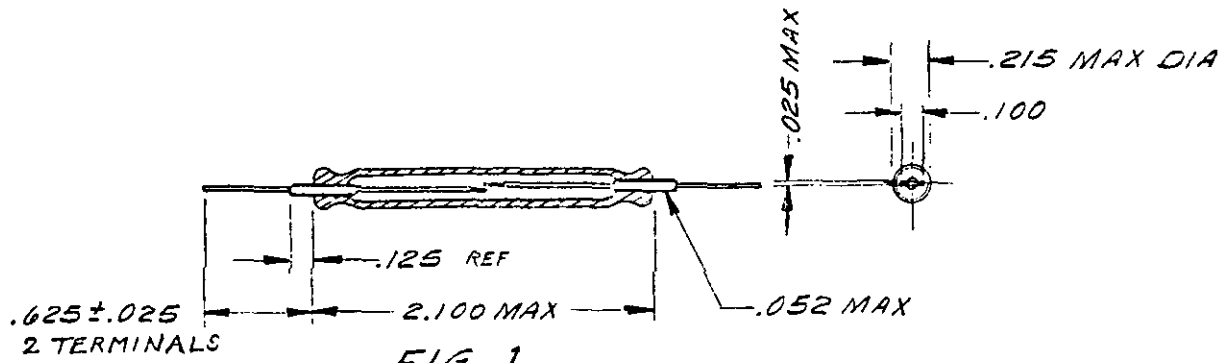


FIG. 1

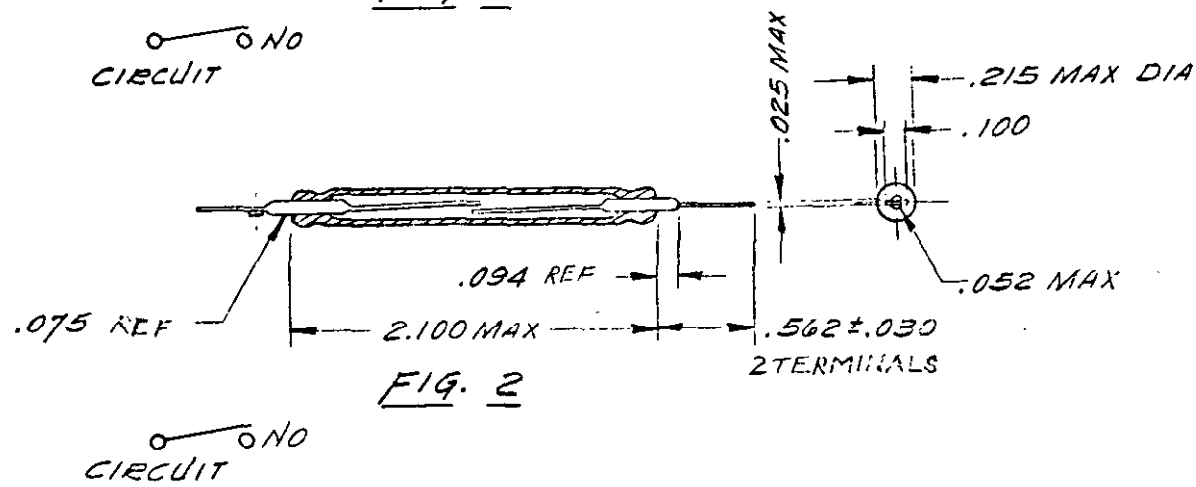


FIG. 2

INCHES	MM	INCHES	MM
.005	.127	.100	2.54
.010	.254	.125	3.17
.025	.635	.215	5.46
.030	.762	.562	14.27
.052	1.32	.625	15.87
.075	1.90	2.100	53.34
.094	2.39		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch= 25.4 mm.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Contact resistance: Initial - See table I.
After life - 1.0 ohm, maximum.

Operate and release ampere-turns: See table I.

Contact bounce: 1.5 milliseconds, maximum.

Operate and release time: 3.0 milliseconds, maximum.

Operating temperature range: -55° to +125°C.

Dielectric withstanding voltage: See table I.

Terminal strength: Applied force - 2 pounds.

Vibration, high frequency: Method 204, test condition A, MIL-STD-202.

Part number: See table I.

Table I. Electrical requirements, dimensions, and part numbers.

Ampere-turns		Contact resistance (ohm, max.)	Dielectric withstanding voltage (volts ac)	Dimensions (Figure)	Part number
Operate (NI)	Release (NI)				
90 ±12	35 ±12	.050	500	1	M55433/6-001
40 ±8	23 ±6	.070	250	1	M55433/6-002
90 ±12	35 ±12	.050	3,500	2	M55433/6-003

Load life: See table II.

Table II. Load life.

Load current Amperes dc	Millions of operations		
	Resistive		
	28v		12v
	-001 and -003	-002	
1.000	1.0	---	20.0
0.500	20.0	5.0	50.0
0.250	50.0	30.0	100.0
0.125	100.0	100.0	100.0
0.010 (low level)	100 at 50 mv		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

The loads to be used for life test and the number of sample units for each test shall be as follows:

1.000 ampere, 28v, resistive - 10 sample units (for -001 and -003)
0.500 ampere, 28v, resistive - 10 sample units (for -002)
0.125 ampere, 28v, resistive - 5 sample units (all part numbers)
1.000 ampere, 12v, resistive - 5 sample units (all part numbers)
0.125 ampere, 12v, resistive - 5 sample units (all part numbers)
0.010 ampere, 50 mv, resistive- 10 sample units (all part numbers)

All other load-life ratings are for application information only.

APPLICATION INFORMATION: Mechanical resonance of these switch capsules is 750 Hertz, minimum.

Preparing activity:

Army - EL

(Project 5930-1292-1)

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:21Z
Check the source to verify that this is the current version before use.