INCH-POUND

MIL-T-55155/21B


19 March 1990
SUPERSEDING
MIL-T-55155/21A
27 October 1971

MILITARY SPECIFICATION SHEET

TERMINALS, STUD (INSULATED), STYLE SE21

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-55155

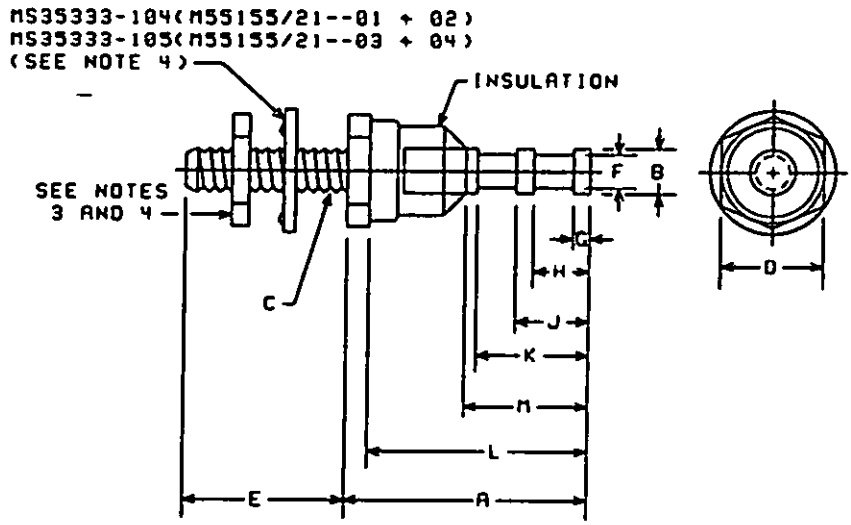

PART NUMBER 1/	DIMENSIONS											
	A	B	C (UNC-2A)	D	E	F	G	H	J	K	L	M
M55155/21--01	.531	.093	No. 4-40	.250	.250	.046	.020	.083	.103	.196	.484	.219
M55155/21--02					.375							
M55155/21--03	.545		No. 6-32	.312	.250						.483	
M55155/21--04					.375							

FIGURE 1. CONFIGURATION AND DIMENSIONS.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015.
3. Hex nut, brass, No. 4-40 UNC-2B x .09 inch thick x .25 inch across flats (M55155/21--01 and M55155/21--02); hex nut, brass, No. 6-32 UNC-2B x .11 inch thick x .31 inch across flats (M55155/21--03 and M55155/21--04).
4. The washer and the hex nut shall be plated with the same finish as that on the mounting base.
5. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Insulation material: Ceramic.
Dielectric withstanding voltage: See table I.

TABLE I. Dielectric withstanding voltage.

Part 1/ number	Pressure	Volts, ac (rms) (min)
M55155/21--01	Atmospheric	1,500
M55155/21--02	Reduced barometric	650
M55155/21--03	Atmospheric	2,000
M55155/21--04	Reduced barometric	650

Pull: 8 pounds, min.

Torque: 3 ounce-inches, min.

Type of mounting: Threaded stud.

TABLE II. Substitutability data.

Part number in MIL-T-55155/21B 1/	Part number in MIL-T-55155/21A 2/
M55155/21--01	SE21-E01
M55155/21--02	SE21-E02
M55155/21--03	SE21-E03
M55155/21--04	SE21-E04

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:30Z
Check the source to verify that this is the current version before use.

2/ The complete number included the symbol for the insulation color.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy -
Air Force -
DLA-GS

User activities:
Army - AT
Navy - MC, AS
Air Force -

Preparing activity:
Army - ER

(Project 5940-1099-21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.