INCH-POUND

MIL-T-55155/22B

19 March 1990


SUPERSEDING
MIL-T-55155/22A
27 October 1971

# MILITARY SPECIFICATION SHEET

## TERMINALS, STUD (INSULATED), STYLE SE22

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-55155

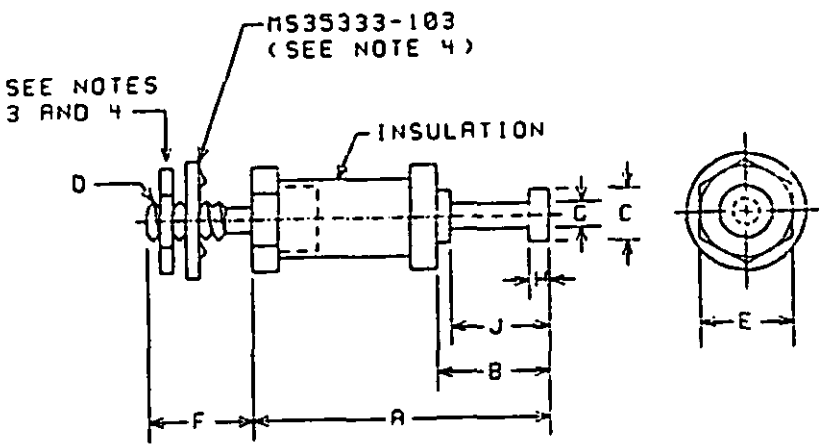


| PART 1/ NUMBER | DIMENSIONS | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G | H | J |
| M55155/22--01 | .398 | .130 | .082 | NO. 2-56 UNC-2A | .125 | .125 | .047 | .020 | .110 |
| M55155/22--02 | | | | | | .187 | | | |
| M55155/22--03 | | | | | | .250 | | | |

FIGURE 1. CONFIGURATION AND DIMENSIONS.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 202640-22T22:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015 inch.
3. Hex nut, brass, No. 2-56 UNC-2B x .06 inch thick x .19 inch across flats.
4. The washer and the hex nut shall be plated with the same finish as that on the mounting base.
5. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Insulation material: Ceramic.
Dielectric withstanding voltage:

| | Volts, ac (rms)(min) |
|---|---|
| At atmospheric pressure: | 1,000 |
| At reduced barometric pressure: | 425 |

Pull: 8 pounds, min.

Torque: 3 ounce-inches, min.

Type of mounting: Threaded stud.

TABLE 1. Substitutability data.

| Part number in MIL-T-55155/22B 1/ | Part number in MIL-T-55155/22A 2/ |
|---|---|
| M55155/22--01 | SE22-E01 |
| M55155/22--02 | SE22-E02 |
| M55155/22--03 | SE22-E03 |

1/ The complete part number shall include the symbol for the insulation color (first dash) and symbol for the conductor material and finish (second dash).

2/ The complete number included the symbol for the insulation color.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy -
Air Force -
DLA-GS

User activities:
Army - AT
Navy - MC, AS, OS
Air Force -

Preparing activity:
Army - ER

(Project 5940-1099-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.