
MILITARY SPECIFICATION SHEET

HOLDER, CRYSTAL, TYPE HC-37/U

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of Specification MIL-H-10056.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

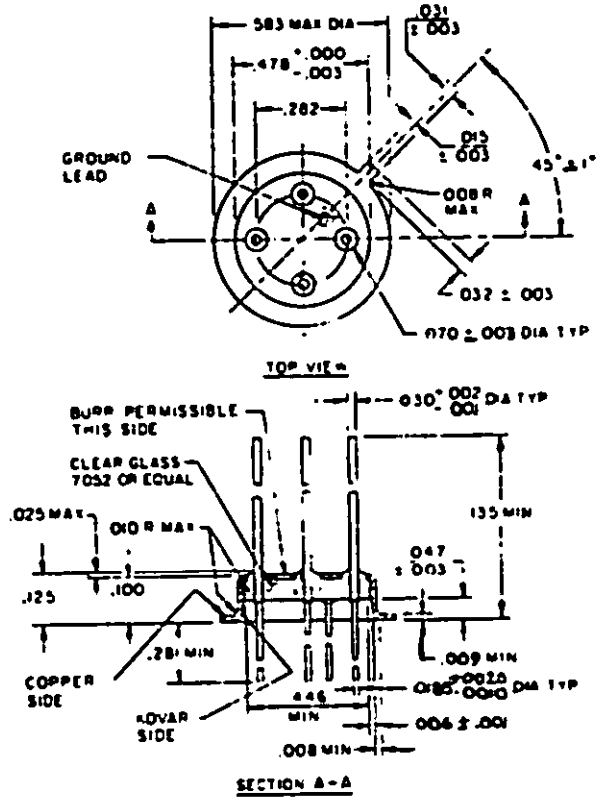


INCHES	MM	INCHES	MM
.0010	.03	.032	.81
.0020	.05	.047	1.19
.003	.08	.070	1.78
.006	.15	.100	2.54
.008	.20	.125	3.18
.009	.23	.135	3.43
.010	.25	.281	7.14
.015	.38	.282	7.16
.0185	.47	.446	11.33
.025	.64	.478	12.14
.030	.76	.583	14.81
.031	.79		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Material: Platform - copper-clad kovar (iron-nickel-cobalt alloy) sheet 30/70 ratio; leads - kovar.
5. Finish: Electroless nickel plating (where applicable) (.150 ±50 microinches).
6. Cold weld cover to header.


FIGURE 1. Dimensions for header of cold-weld crystal holder, type HC-37/U.

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:27Z
Check the source to verify that this is the current version before use.

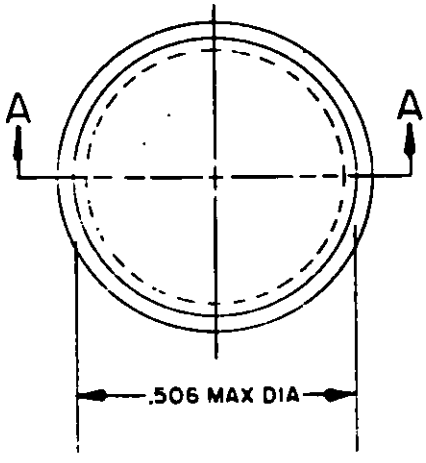

INCHES	MM
.001	.03
.002	.05
.003	.08
.010	.25
.015	.38
.100	2.54
.481	12.22
.506	12.85
.580	14.73

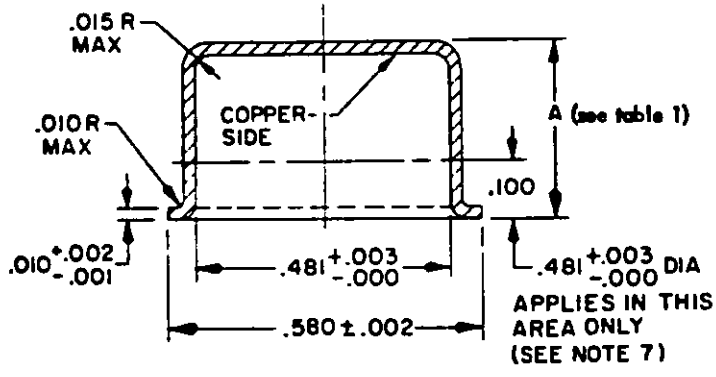

SECTION A-A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Material: Copper-clad kovar, or copper-clad steel, or nickel, grade A233, or OFHC copper.
5. Finish: Electroless nickel plating (where applicable).
6. Cold weld.
7. .481 diameter may vary ±.005 (.13 mm) beyond .100 dimension.

FIGURE 2. Dimensions for the cover of crystal holder, type HC-37/U.

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1, and table I.

Materials: See figure 1.

Part number: Consists of the basic number of this specification sheet and a sequentially assigned dash number taken from table I.

TABLE I. Dash number and overall external cover height.

Part number M10056/24-	A 1/
1	$.245^{+.005}_{-.000}$ $(6.22^{+.13}_{-.00})$
2	.570 ±.010 (14.48 ±.25)
3	.970 ±.010 (24.64 ±.25)
4	1.525 ±.010 (38.74 ±.25)
5	2.325 ±.010 (59.06 ±.25)

1/ Millimeters are in parentheses.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, MU, SM
Navy -
Air Force - 11, 85
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 84

Preparing activity:
Army - EL

(Project 5955-0339)

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:27Z
Check the source to verify that this is the current version before use.