MIL-H-0010056/24A(USAF)
25 October 1974
USED IN LIEU OF
MIL-H-10056/24
5 May 1969

MILITARY SPECIFICATION SHEET

HOLDER, CRYSTAL, TYPE HC-37/U

This limited coordination Military Specification Sheet has been prepared by the Department of the Air Force based upon currently available technical information, but it has not been approved for promulgation as a coordinated revision of Military Specification Sheet MIL-H-10056/24. It is subject to modification. However, pending its promulgation as a coordinated Military Specification Sheet, it may be used in procurement.

INCHES	MM	INCHES	MM
.0010	.03	.032	.81
.0020	.05	.047	1.19
.003	.08	.070	1.78
.006	.15	.100	2.54
.008	.20	.125	3.18
.009	.23	.135	3.43
.010	.25	.281	7.14
.015	.38	.282	7.16
.0185	.47	.446	11.33
.025	.64	.478	12.14
.030	.76	.583	14.81
.031	.79		


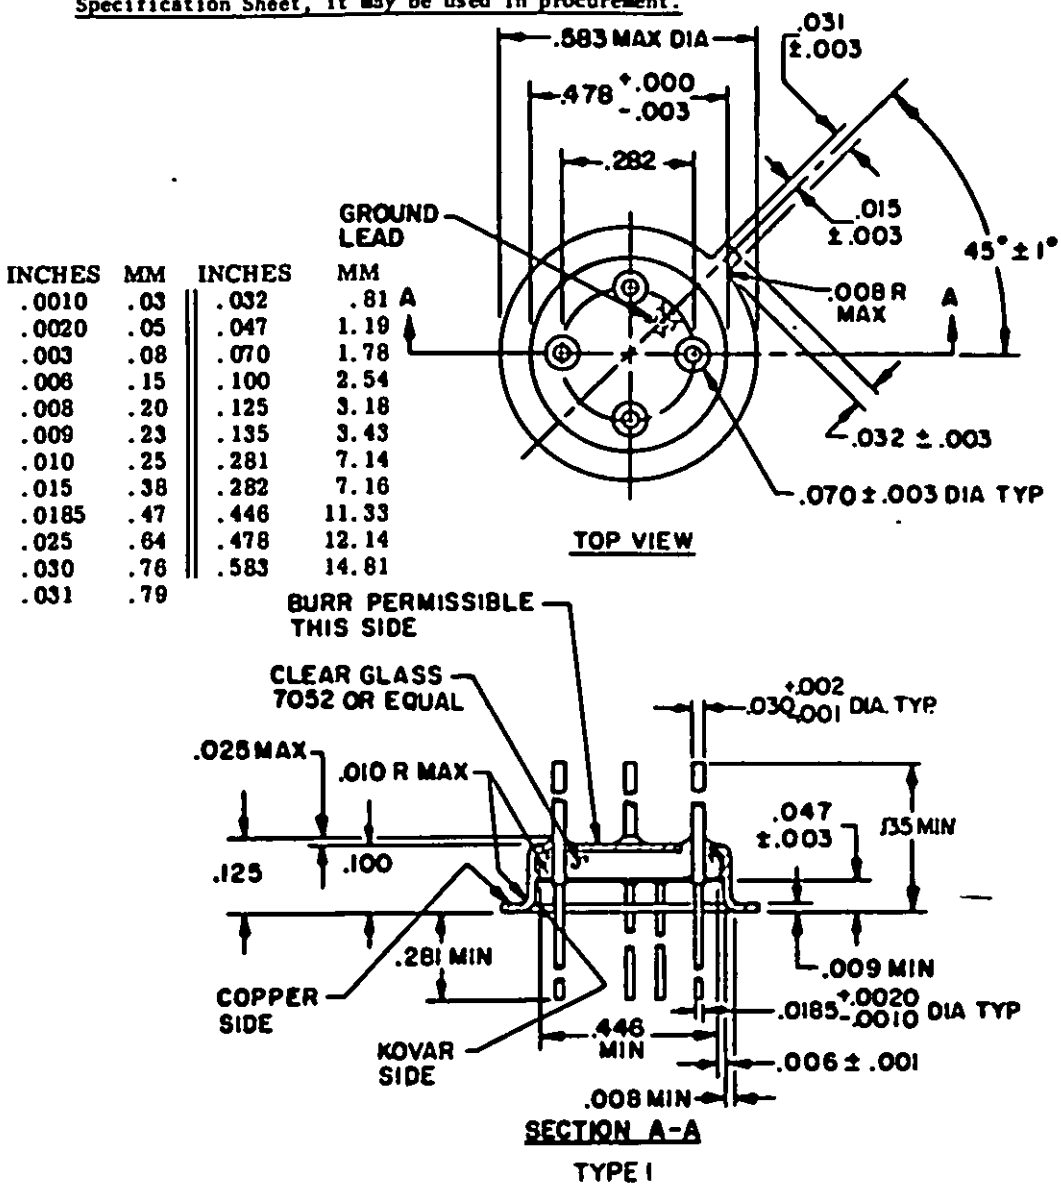



FIGURE 1. Dimensions for a 4 pin header of cold-weld crystal holder, type HC-37/U.

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:27Z
Check the source to verify that this is the current version before use.

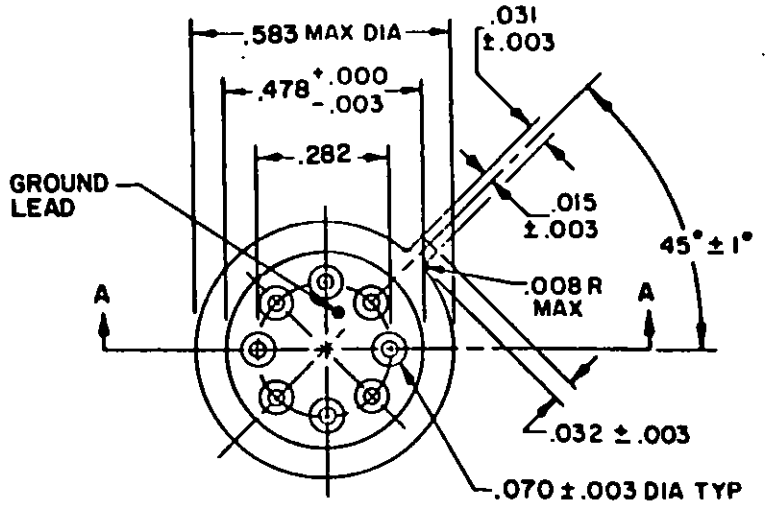

TOP VIEW

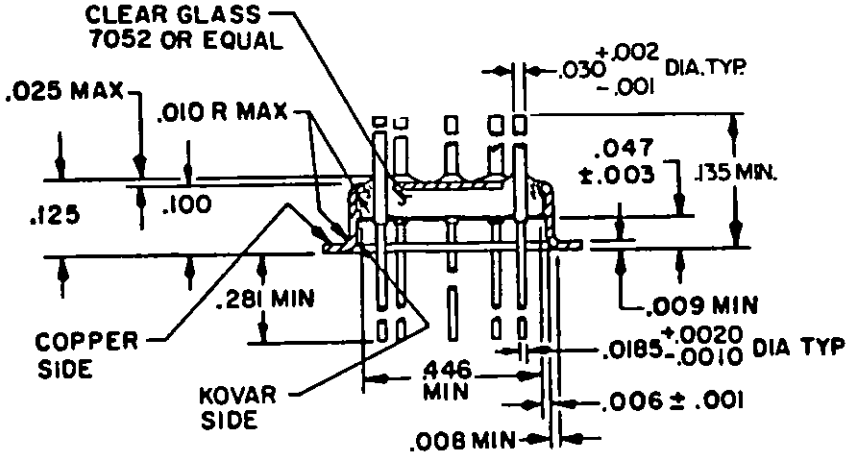


SECTION A-A

TYPE 2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Material: Platform - copper-clad kovar (iron-nickel-cobalt alloy) sheet 30/70 ratio; leads - kovar.
5. Finish: Electroless nickel plating (where applicable) (.150 ±50 microinches).
6. Cold weld cover to header.

FIGURE 2. Dimensions for a 8 pin header of cold-weld crystal holder, type HC-37/U.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:27Z
Check the source to verify that this is the current version before use.

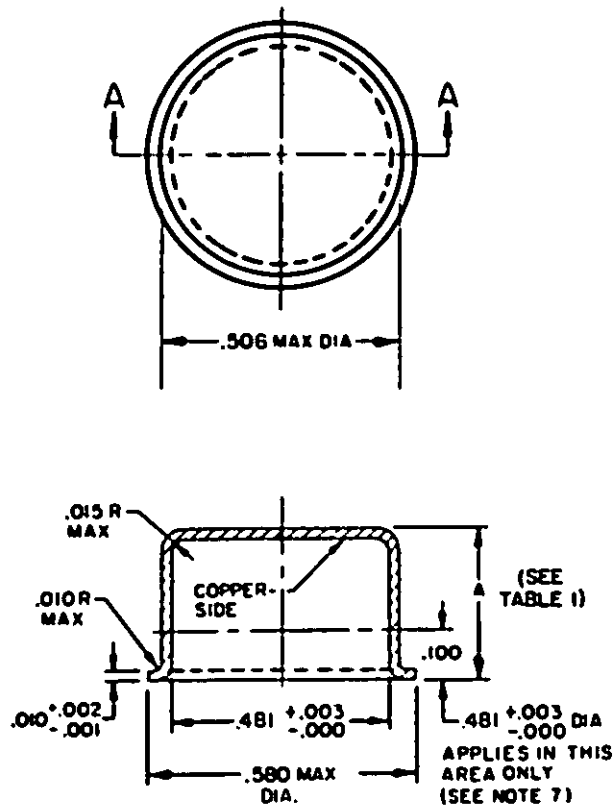

INCHES	MM
.001	.03
.002	.05
.003	.08
.010	.25
.015	.38
.100	2.54
.481	12.22
.506	12.85
.580	14.73

SECTION A-A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Material: Copper-clad kovar, or copper-clad steel, or nickel, grade A233, or OFHC copper.
5. Finish: Electroless nickel plating (where applicable).
6. Cold weld.
7. .481 diameter may vary ±.005 (.13 mm) beyond .100 dimension.

FIGURE 3. Dimensions for the cover of crystal holder, type HC-37/U.

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:27Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1, 2, and 3 and table I.

Materials: See figures 1, 2, and 3.

Part number: M10056/24- (dash number from table I).

TABLE I. Dash number and characteristics.

Dash number	Overall external cover height figure 3 A 1/	Figure
1	$.245\ ^{+.005}_{-.000}$ ($6.22\ ^{+.13}_{-.00}$)	1
2	.570 ±.010 (14.48 ±.25)	1
3	.970 ±.010 (24.64 ±.25)	1
4	1.525 ±.010 (38.74 ±.25)	1
5	2.325 ±.010 (59.06 ±.25)	1
6	$.245\ ^{+.005}_{-.000}$ ($6.22\ ^{+.13}_{-.00}$)	2
7	.570 ±.010 (14.48 ±.25)	2
8	.970 ±.010 (24.64 ±.25)	2
9	1.525 ±.010 (38.74 ±.25)	2
10	2.325 ±.010 (59.06 ±.25)	2

1/ Millimeters are in parentheses.

Custodians:
Air Force - 11

Review activities:
Air Force - 11
DSA - ES

User activities:
Air Force - 11

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5955-F165)

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:27Z
Check the source to verify that this is the current version before use.