MILITARY SPECIFICATION SHEET

HOLDER (ENCLOSURE), CRYSTAL, TYPE HC-44/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of Military Specification MIL-H-10056.


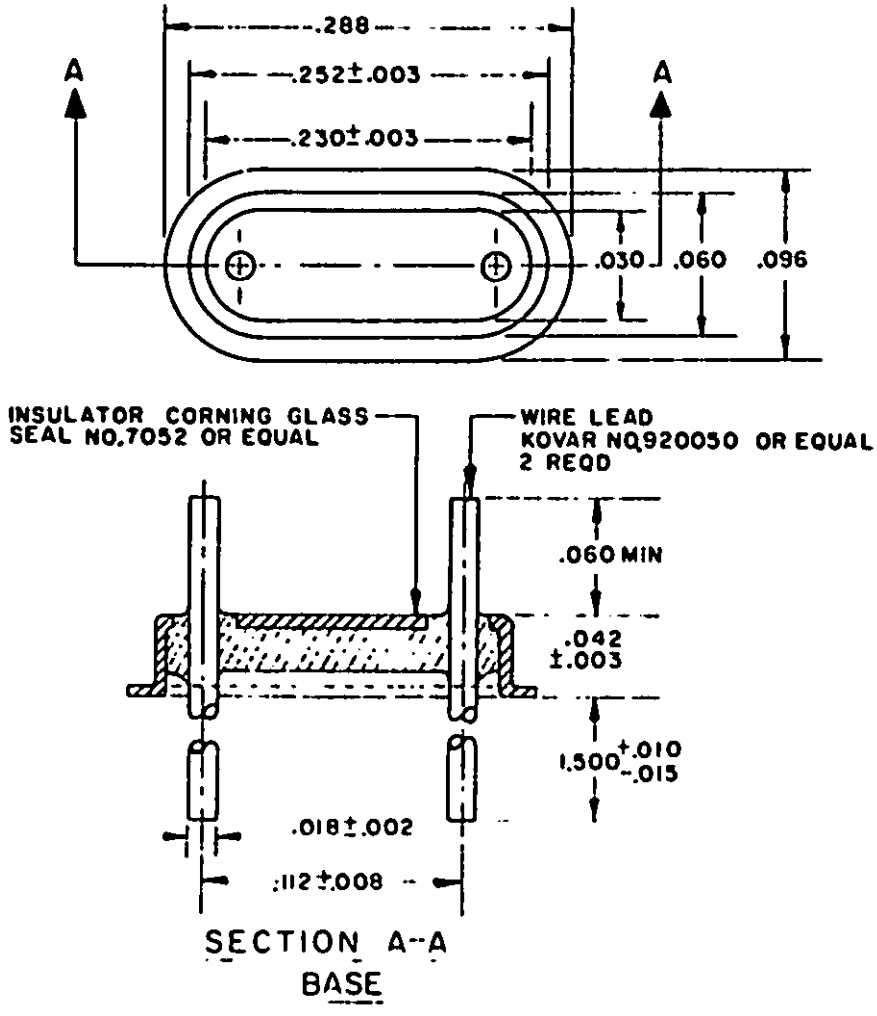



FIGURE 1. Type HC-44/U micro-miniature solder seal crystal holder (enclosure).

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:28Z
Check the source to verify that this is the current version before use.

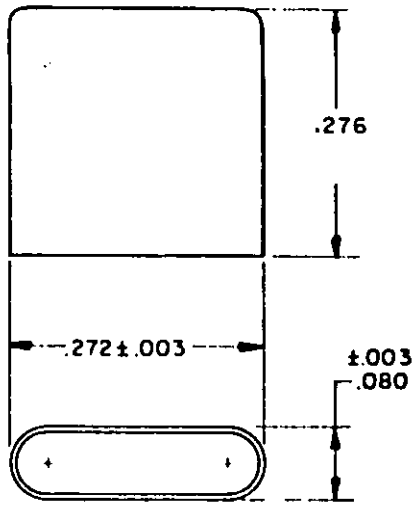

COVER



ASSEMBLY
BEFORE SOLDERING

INCHES	MM
.002	.050
.003	.080
.008	.200
.010	.250
.015	.380
.018	.460
.030	.760
.042	1.07
.060	1.52
.080	2.03
.096	2.44
.112	2.84
.230	5.84
.252	6.40
.272	6.91
.276	7.01
.288	7.32
.300	7.62
1.500	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .005 (.13 mm).
4. Material: Copper-clad kovar, or copper-clad steel, or nickel, grade A233, A270, or OFHC copper.
5. Finish: Electroless nickel plating in accordance with Class 1 of MIL-C-26074.
6. This item is similar to the EIA item CO-20.

FIGURE 1. Type HC-44 U micro-miniature solder seal crystal holder (enclosure) - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Materials: See figure 1.

Part number: Consists of the basic number of this specification and a sequentially assigned dash number - M10056/31-1.

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, MI, MU, SM
Navy -
Air Force - 11, 80
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS
Air Force - 17, 19, 84

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0388)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:28Z
Check the source to verify that this is the current version before use.