
MILITARY SPECIFICATION SHEET

HOLDER (ENCLOSURE), CRYSTAL, TYPE HC-45/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of Military Specification MIL-H-10056.

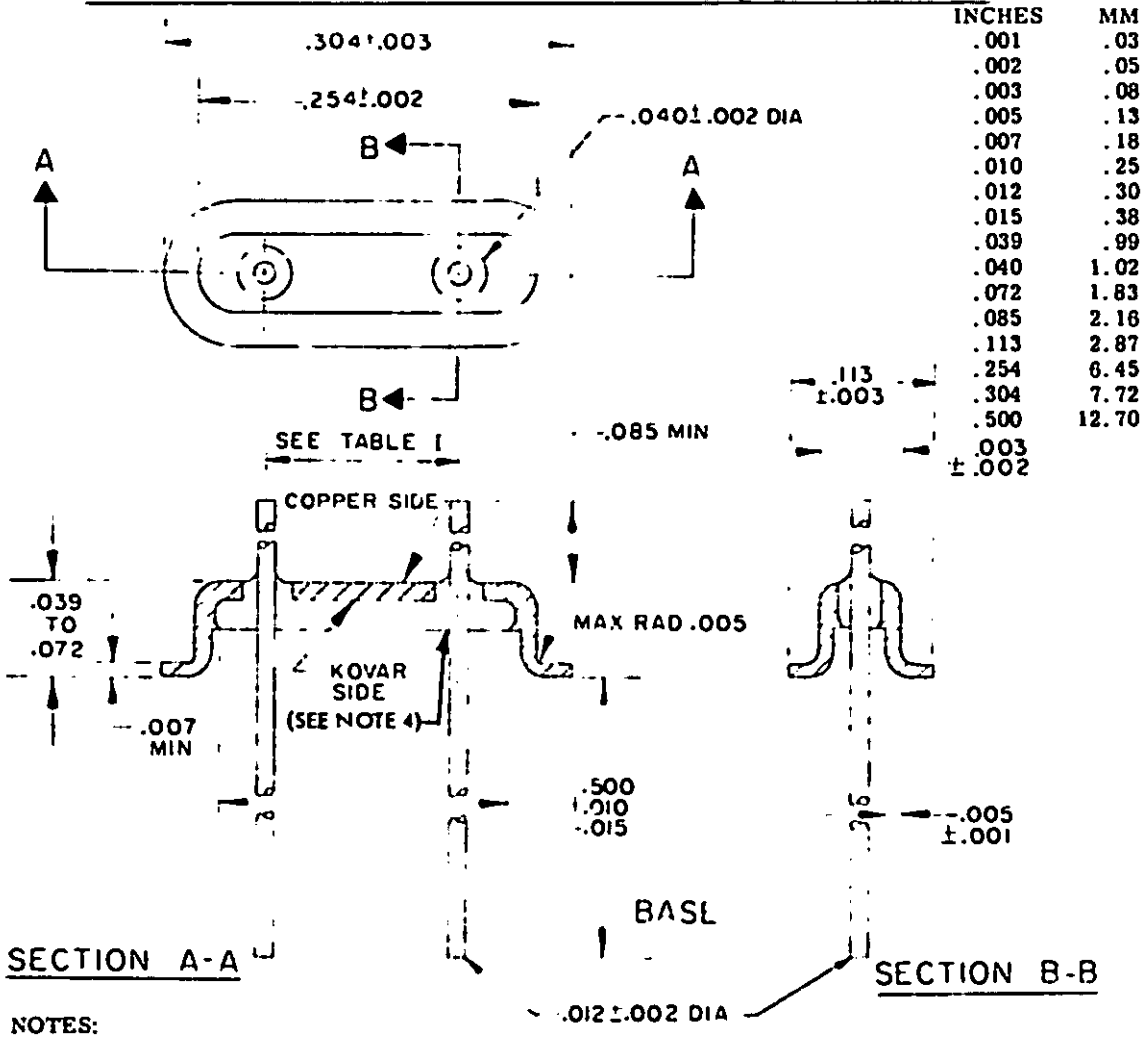


INCHES	MM
.001	.03
.002	.05
.003	.08
.005	.13
.007	.18
.010	.25
.012	.30
.015	.38
.039	.99
.040	1.02
.072	1.83
.085	2.16
.113	2.87
.254	6.45
.304	7.72
.500	12.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Material: Copper-clad kovar, or copper-clad steel, or nickel, grade A233, A270, or OFHC copper. Leads - kovar (2); insulator - Corning glass #7052 or equal.
5. Finish: Electroless nickel plating in accordance with Class 1 of MIL-C-26074.
6. This item is similar to the EIA item CO-21.

FIGURE 1. Type HC-45/U micro-miniature cold-weld crystal holder (enclosure).

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:28Z
Check the source to verify that this is the current version before use.

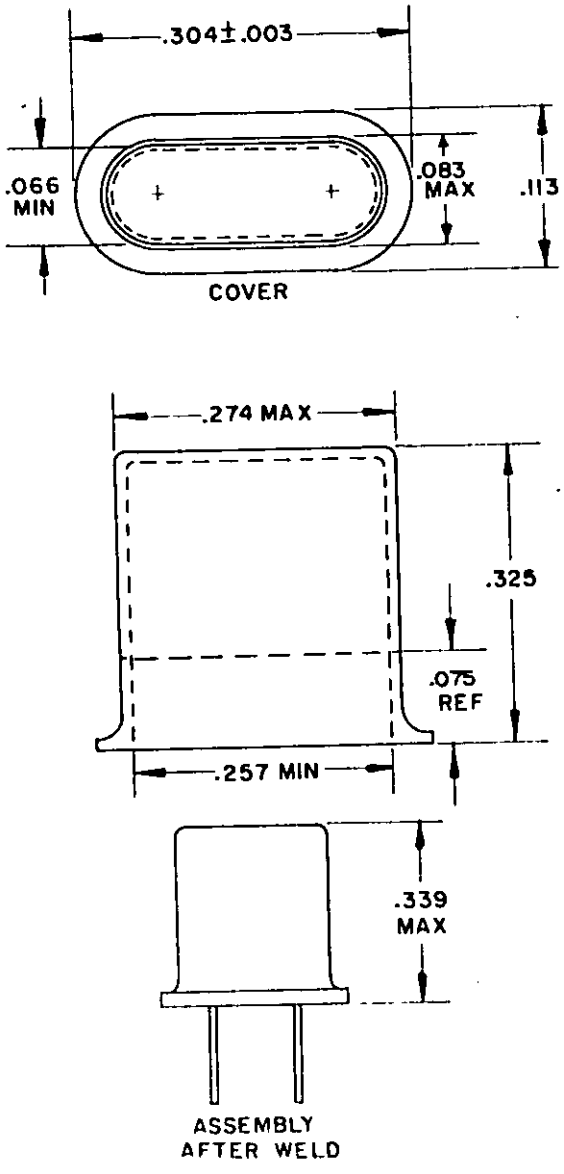

INCHES	MM
.003	.08
.066	1.68
.075	1.91
.083	2.11
.113	2.87
.257	6.53
.274	6.96
.304	7.72
.325	8.26
.339	8.61

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .005 (.13 mm).
4. Material: Copper-clad kovar, or copper-clad steel, or nickel, grade A233, A270, or OFHC copper.
5. Finish: Electroless nickel plating in accordance with Class 1 of MIL-C-26074.
6. This item is similar to the EIA item CO-21.

FIGURE 2. Dimensions for the cover of cold-weld crystal holder (enclosure) type HC-45/U.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Materials: See figures 1 and 2.

TABLE I. Dash numbers and pin spacing.

Dash number	A
1	.118 ±.008 (3.00 ±.20)
2	.147 ±.008 (3.73 ±.20)

Part number: M10056/32- (dash number from table I).

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, MI, MU, SM
Navy -
Air Force - 11, 80
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS
Air Force - 17, 19, 84

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0389)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:28Z
Check the source to verify that this is the current version before use.