
MILITARY SPECIFICATION SHEET

HOLDER (ENCLOSURE), CRYSTAL, TYPE HC-46/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of Military Specification MIL-H-10056.

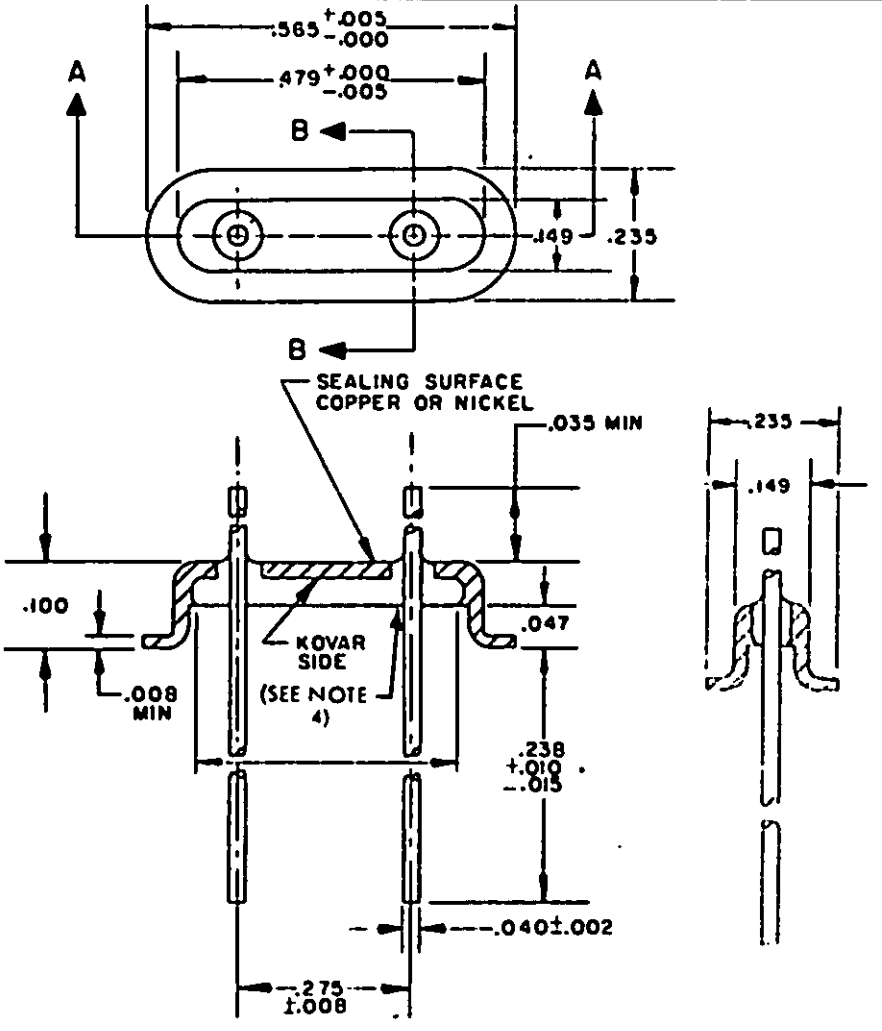

INCHES	MM
.002	.05
.005	.13
.008	.20
.010	.25
.015	.38
.025	.64
.035	.89
.040	1.02
.047	1.19
.100	2.54
.149	3.78
.175	4.45
.235	5.97
.238	6.05
.275	6.99
.479	12.17
.565	14.35


SECTION A-A BASE SECTION B-B

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .005 (.13 mm).
4. Material: Platform - copper-clad kovar (iron-nickel-cobalt alloy) sheet 30/70 ratio; leads - kovar (2); insulator - Corning clear glass type 7052 or equal.
5. Finish: Electroless nickel plating in accordance with Class 1 of MIL-C-26074.
6. This item is similar to the EIA item CO-19.


FIGURE 1. Dimensions for header of cold-weld crystal holder (enclosure) type HC-46/U.

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:28Z
Check the source to verify that this is the current version before use.

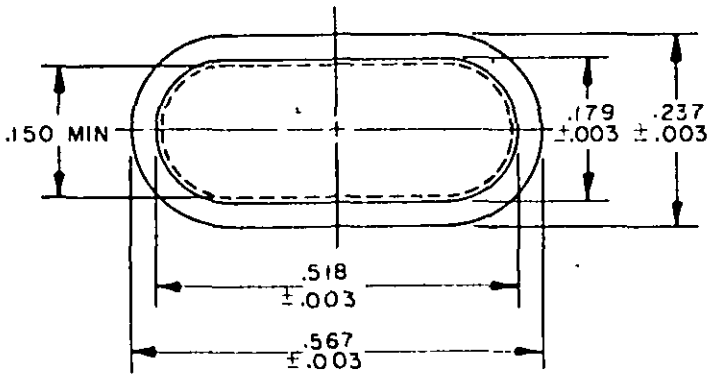

INCHES	MM
.003	.08
.007	.18
.010	.25
.015	.38
.150	3.81
.179	4.55
.237	6.02
.480	12.19
.518	13.16
.567	14.40
.615	15.62
.635	16.13

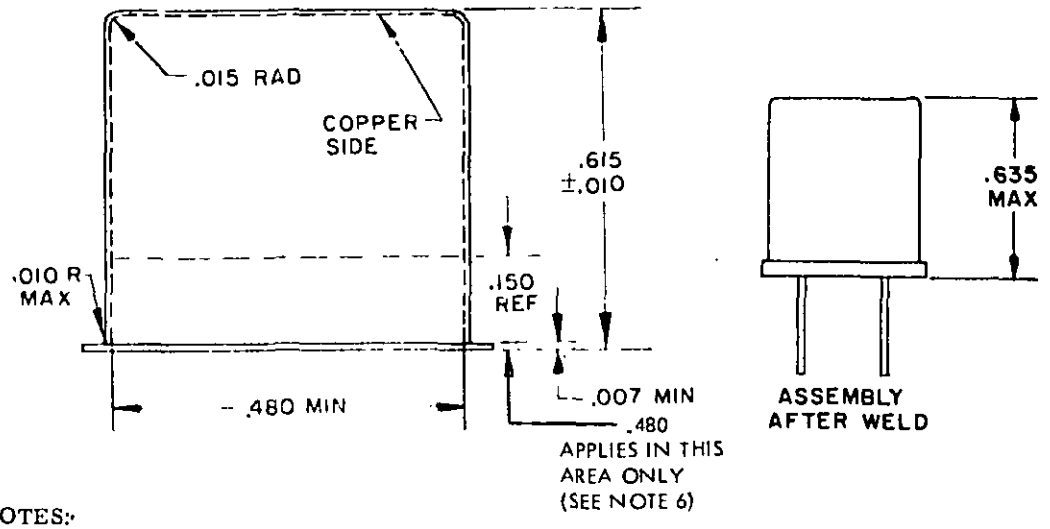

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .005 (.13 mm).
4. Material: Copper-clad kovar, or copper-clad steel, or nickel, grade A233, A270, or OFHC copper.
5. Finish: Electroless nickel plating in accordance with Class 1 of MIL-C-26074.
6. .480 (12.19 mm) dimension may vary + .005 (.13 mm) beyond .150 (3.81 mm) dimension.
7. Bottom flange surface to be smooth and free of tool marks and scratches.

FIGURE 2. Dimensions for the cover of cold-weld crystal holder (enclosure type HC-46/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Materials: See figures 1 and 2.

Part number: Consists of the basic number of this specification and a sequentially assigned dash number - M10056/33-1.

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, MI, MU, SM
Navy -
Air Force - 11, 80
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS
Air Force - 17, 19, 84

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0390)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973 - 713-148/2048

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:28Z
Check the source to verify that this is the current version before use.