MILITARY SPECIFICATION SHEET

# TRANSMISSION, POWER, CONSTANT RATIO GEARBOX, ENGINE MOUNTED 47 HP

The complete requirements for procuring the gearbox described herein shall consist of this document and the issue in effect of MIL-T-5091 (WP).




NOTES:

1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, FRACTIONS ±1/32, ANGLES ±1°.
2. LOAD TO BE CARRIED AT 2300-9025 RPM, 47 HP CONTINUOUS, 70 HP FOR 5 MIN, 94 HP FOR 5 SEC.
3. RATIO - OUTPUT SHAFT TO ENGINE PAD SPEED, 1.218:1.
4. SHEAR SECTION-INPUT SHAFT, 3250 TO 4000 LB-IN.
5. MANUAL DISCONNECT PLUNGER RELEASE PIN REQUIRES 1/2 INCH MAX TRAVEL AND 25 LB MAX FORCE FOR DISCONNECT.
6. AFTER DISCONNECT ACTIVATION, THE GEARBOX MUST BE REMOVED AND REPAIRED.
7. WEIGHT - 14 LB MAX.
8. GEARBOX SHALL BE FINISHED IN A COLOR CONFORMING TO MILITARY STANDARD 595 COLOR NUMBER 17875. THE FINISH SHALL BE UNAFFECTED BY ENVIRONMENTAL CONDITIONS SPECIFIED HEREIN.
9. FLIGHT TEST: 100 HOURS FLIGHT TIME ON THE S2 AIRCRAFT IS REQUIRED FOR QUALIFICATION.

PART NUMBER: M5091/3-47

FSC 6115

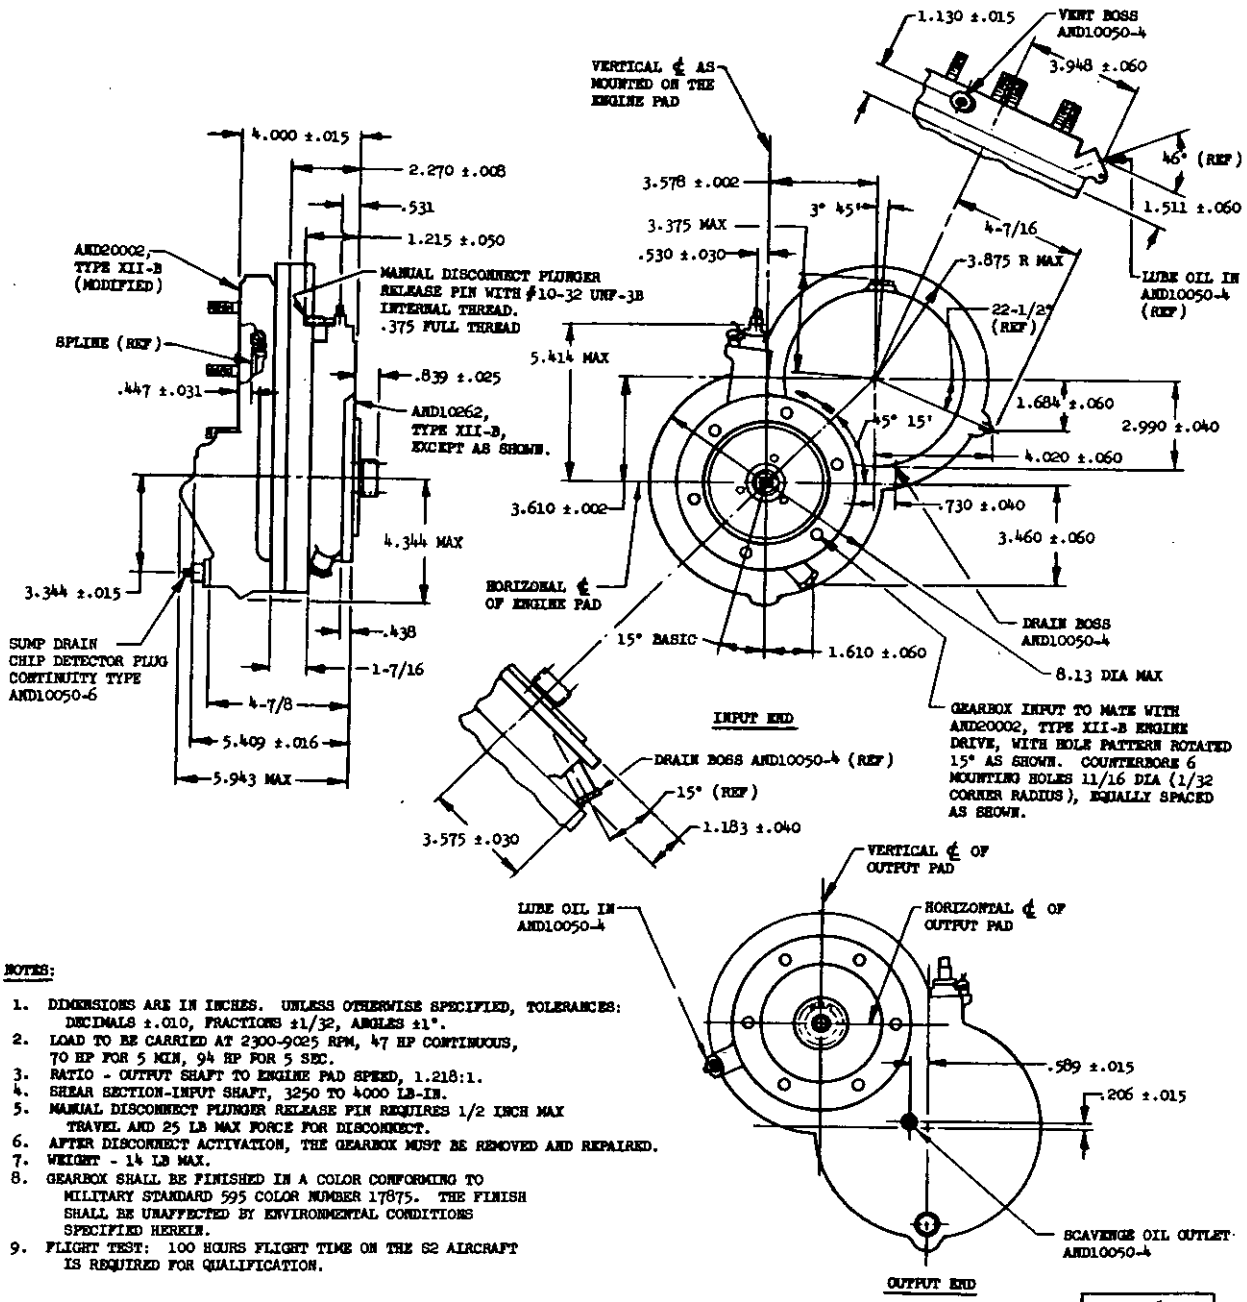

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:19Z
Check the source to verify that this is the current version before use.