MIL-B-2619A
30 December 1957
SUPERSEDING
MIL-B-2619
8 March 1951

MILITARY SPECIFICATION

BAG, PATIENT'S EFFECTS

This specification has been approved by the Department of Defense and is mandatory for use by the Department of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers a patient's effects bag, olive drab color, in one type and size, approximately 10 inches in diameter and 12 inches deep, containing an inserted waterproof pocket 9 1/2 inches deep. The bag is closed by means of drawstrings in the top of bag.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards, and drawings, of the issue in effect on the date of invitation for bids, form a part of this specification:

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
TT-I-559	- Ink, Marking Stencil, Opaque, for Porous Surfaces (Wood Boxes, Fiber Cartons, etc.).
CCC-T-191	- Textile Test Methods.
DDD-S-751	- Stitches; Seams; and Stitching.
DDD-T-86	- Tape, Cotton, Bleached, Dyed, or Grey, General Use.
PPP-B-636	- Boxes, Fiber.

MILITARY

JAN-C-380	- Cloth, Cotton, Sheeting, Coating - Quality.
JAN-C-517	- Cloth, Label, Cotton, Permanent - Coated.
MIL-G-16491	- Grommet, Metallic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 - Marking for Shipment and Storage.

DRAWINGS

QUARTERMASTER CORPS

2-3-91 - Bag, Patient's Effects; Illustration, Assembly and Sections.

2-3-92 - Bag, Patient's Effects; Details.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Figures 1 and 2 are miniature reproductions of referenced drawings and are attached for information only.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified, before production is begun a sample of the finished commodity shall be submitted to the contracting officer for approval (see 6.2).

3.2 Materials. The materials shall conform in all respects to the specifications and drawings listed in section 2 and as specified herein.

3.2.1 Basic cloth for bag. The basic cloth for the body of the bag shall be cotton cloth, coating-quality sheeting, vat dyed olive drab No. 7 shade, conforming to type II, class A, B, C, D, E, or F of Specification JAN-C-380. No other coating or finish shall be applied to the cloth, the pocket being the only portion of the bag which is coated as hereinafter specified.

3.2.2 Basic cloth for pocket. Basic cloth for pocket shall be the same as specified in 3.2.1.

3.2.2.1 Coating compound. The coating compound shall be a suitable polymerized or copolymerized vinyl resin, or synthetic rubber suitably pigmented and plasticized. The compound shall be nontoxic, non-irritating and shall contain no water soluble material. Thermoplastic polyvinyl butyral is not permitted. If thermosetting polyvinyl butyral is used, it shall be so compounded and modified as to permit the material to undergo thermosetting or heat conversion. After conversion, the finished coating shall not have thermoplastic properties and shall not be sensitive to ethanol.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

3.2.2.2 Coated fabric. The coated fabric shall be cotton cloth, coating-quality sheeting, olive drab No. 7 shade, synthetic resin coated or synthetic rubber coated. The fabric, before coating, shall meet the requirements of 3.2.1. After coating, it shall be suitable for fabricating into a pocket to protect material contained therein from moisture. The coating compound shall be applied on one side of the cloth. The compound shall have gocd adhesion to the cloth, shall be flexible, free of tackiness, resistant to abrasion and scratching, and shall not tender the fabric. When subjected to a temperature of 0° Fahrenheit (F.), the coating shall not crack when folded sharply. The coated fabric shall be free of pinholes, free of windows, and shall conform to the requirements specified in table I. When tested as specified in table II, loss in tensile strength of cloth shall not exceed 25 percent of original, and material shall neither become stiff and brittle nor soft and tacky. If the coated fabric is polyvinyl butyral or synthetic rubber, it shall be cured prior to being fabricated into pockets.

3.2.3 Draw tape. Draw tape shall be cotton tape, vat dyed olive-drab shade No. 7, 5/8 inch wide, conforming to Specification DDD-T-86.

3.2.4 Thread, cotton, machine. The thread shall conform to Specification V-T-276. The finished thread shall show fastness to chlorine bleaching and laundering equal to the standard sample (see 6.3). If no standard sample is available the thread shall show fair fastness to chlorine bleaching and laundering. Thread sizes and types shall be as follows:

For all stitching -

Ticket No. 40/3, Type IB3 for needle.

Ticket No. 50/3, Type IA3 for bobbin or looper.

Table I

Weight of coated fabric per sq. yd. in ounces	Tearing strength scale reading		Water resistance hydrostatic test	Resistance to blocking at 180°F.	Low temperature effect	Adhesion of coating
	Warp	Filling				
4.0 minimum 8.0 maximum	25(Min)	20(Min)	15 pounds	No adhesion exudation or damage to surface	Shall neither crack nor lose more than 50 percent hydrostatic resistance	6 lbs (min)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

3.2.4.1 Thread, color. The thread shall be vat-dyed to match olive-drab shade S-1 (cable No. 66022).

3.2.5 Cloth, label, cotton, permanent coated. The label cloth shall conform to Specification JAN-C-517.

3.2.6 Ink. The ink shall be black and meet the light and water-spray requirements of Specification TT-I-559.

3.2.7 Grommets, metallic, brass, black chemical finish, with toothed washers, No. 0. The grommets with washers shall conform to type II, class 3 of Specification MIL-G-16491.

3.3 Construction. The construction shall conform in all respects, to the drawings listed in section 2 and as specified herein. The coated side of the fabric shall be on the inside of the pocket. Both ends of the pocket shall be bartacked along the inside stitch. The two draw tapes shall be not less than 38 inches long.

3.3.1 Stitching machine.

3.3.1.1 Types of stitching. Stitching, except bartacking, shall conform to Specification DDD-S-751 as follows:

For all stitching except stitching indicated by "Z" on drawings:

Type 301. 8 to 10 stitches to the inch.

For stitching indicated "Z" on drawings:

For 301 or 401, 8 to 10 stitches to the inch. When type 401 is used, the chain portion of stitching shall not appear on outside of bag.

3.3.1.1.1 Type 301 stitching. All thread breaks in stitching shall be backstitched not less than 1-inch at each break (with the exception of bartacking). All stitching shall be backstitched at the ends to prevent raveling, except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching and the lock will be embedded in the center of the material sewed.

3.3.1.1.2 Type 401 stitching. All thread breaks in stitching, type 401, shall be over-stitched not less than 1 inch at each break. Thread tension shall be maintained so that there will be no loose stitching.

3.3.1.2 Bartacking. Bartacking for draw tapes shall be not less than 5/8 inch in length with 1/8 inch bight, and shall contain not less than 28 stitches, on superimposed tape, as shown on drawing. Bartacking for both ends of pocket shall be not less than 1/2 inch in length with 1/8 inch bight and shall contain not less than 28 stitches. Bartacking shall be free of

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

thread breaks and loose stitching.

3.3.1.3 All thread ends shall be trimmed.

3.3.2 Setting of grommets. Holes punched to receive the grommets shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be tightly clinched without cutting the materials.

3.3.3 Label. A plain label, 2-1/2 inches square, made of the label cloth specified in 3.2.5, shall be stitched to the front of the bag in the location and as shown on the drawing.

3.4 Identification marking.

The Medical Services insignia and the identification marks shall be printed or stencilled in the size characters and in the locations shown on the drawings. The identification marks shall be as follows:

Approved item identification of item.

Name or registered trade-mark of the manufacturer.

3.5 Workmanship. The finished bag shall conform to the quality and grade of product established by this specification, and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 General. The quality assurance provisions contained in this section are applicable to inspection performed by and for the Government. Quality assurance provisions for components or materials described shall be in accordance with this specification and with subsidiary specifications, drawings and standards referenced herein to the extent applicable, except that this specification shall govern in the event of conflict.

4.2 Pre-acceptance inspection. Before production is commenced, a completely fabricated bag shall be made available for inspection to determine compliance with this specification and to secure approval of the contracting officer. When the preproduction sample is approved, it shall be retained by the contractor as a control guide for subsequent production of the contract. The preproduction sample may be included in the quantity for the last shipment.

4.3 Inspection for acceptance. Inspection shall be in accordance with the provisions of Standard MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Inspection of components and materials. The quality assurance provisions for components and materials, except as otherwise required by this specification, shall be in accordance with the applicable specifications

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

and standards referenced herein. When there is a conflict in quality assurance provisions, this specification shall govern.

4.3.2 Test specimens. Samples of completed bags submitted to the laboratory for testing purposes to determine compliance with specifications shall be accompanied by test specimens, properly labeled, in the quantities listed below.

Cloth, cotton, sheeting, coating-quality....2 square yards

Coated fabric.....2 square yards

Tape, cotton.....5 yards

Thread.....120 yards Ticket No. 40/3, IB3
120 yards Ticket No. 50/3, IA3

Label cloth.....1 square foot

Contractor shall certify that the test specimens furnished, represent the material employed in the fabrication of the bags delivered.

4.3.2.1 End product inspection

4.3.2.2 Examination of the end product. The defects found during examination shall be classified in accordance with 4.3.2.3 and 4.3.2.4. The sample unit for these examinations shall be one finished bag.

4.3.2.3 General defects.

	Classification	
	Major	Minor
Fabric defects:		
a. Any holes, cuts, tears, or any seriously weakening defects such as smashes, floats, loose slubs and needle chews expected to develop into holes.....	X	
b. Any mends, patches.....	X	
c. Coating tacky, cracked, blistered, flaky or thin..	X	
Seams and stitching:		
a. Wrong seam or stitch type:		
- Seriously affecting serviceability.....	X	
- Slightly affecting serviceability.....		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

	Major	Minor
b. Open seams:		
On stitch type 301:		
- More than 3/8 inch		X
- More than 1 inch	X	
On stitch type 401; except run-offs	X	
Run-offs:		
- More than 3/8 inch		X
- More than 1 inch	X	
Raw edges more than 3/4 inch when securely caught in stitching (except on label and on edge of pocket opening)		X
c. Seams badly puckered or pleated		X
d. Loose tension resulting in loose seam	X	
e. Loose tension resulting in locsely exposed bobbin or top thread		X
f. One to two stitches per inch less than minimum specified		X
Three or more stitches per inch less than minimum specified	X	
One or more stitches in excess of maximum specified		X
Note: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or in turning corners shall be classified as follows:		
(1) Within the minor defect classification - no defect		
(2) Within the major defect classification - minor defect		
g. Stitching gage on double needle stitching under or over specified width by more than 1/16 inch		X
h. Thread breaks overstitched or backstitched less than 1 inch		X
i. Stitching ends not backstitched (except where ends are held down by other stitching or turned under in a hem)		X
j. Chain portion of 401 stitching appearing outside bag		X
k. One bartack omitted on either side seam, or misplaced, not properly securing draw strings		X
l. Bartacks not as specified (see 3.3.1.2)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

	Major	Minor
m. More than one bartack omitted on either side seam, or misplaced, not properly securing draw strings.	X	
n. Bartack stitching loose or broken.....		X
Note: A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more consecutive skipped stitches or run-offs occur. Raw edges not securely caught in stitching shall be classified as open seams. On double stitched seams a seam shall be considered open when either one or both sides of the seam are open.		
Cleanness:		
Grease or oil stains clearly noticeable; threads ends not trimmed throughout.....		X
Components and assembly:		
a. Any defect of components or assembly (not specifically classified in this section), seriously affecting serviceability.....	X	
b. Any defect of components or assembly (not specifically classified in this section), slightly limiting serviceability.....		X

4.3.2.4 Detailed defects.

	Classification	
	Major	Minor
Top hem:		
Construction not as specified, width less than specified by 1/4 inch or more.....		X
Grommets:		
a. Size not as specified, misplaced, set with barrel extending beyond edge of body seams or set with rim extending to top of bottom edges of hem, improperly clinched.....		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

	Major	Minor
b. Omitted, unfinished, broken, cracked, or distorted failing to serve purpose; burrs or sharp edges....	X	
Drawstrings:		
a. Omitted or caught in hem stitching.....	X	
b. Looped end of drawstrings extend less than 2 inches from grommets with top of bag fully extended.....		X
Marking:		
a. Omitted, incorrect, illegible, misplaced or dimensions not as specified.....		X
Label:		
a. Omitted.....	X	
b. Misplaced more than 1 inch from location specified.		X
Inside pocket:		
a. Omitted.....	X	
b. Top edge not caught in body hem stitching.....	X	
c. Misplaced, coated side on outside of pocket, dimensions less than specified by more than 1/2 inch...		X
Overall dimensions:		
a. Smaller than nominal dimensions less applicable minus tolerance indicated on drawings, but not smaller than nominal dimensions less twice the applicable minus tolerance.....		X
b. Smaller than nominal dimensions less twice the applicable minus tolerance indicated on drawing.....	X	
c. Larger than nominal dimensions and applicable plus tolerance indicated on drawing.....		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

4.3.3 Acceptable quality levels. Acceptable quality levels shall be as follows:

For defects applicable to 4.3.2.3 and 4.3.2.4

2.5 Major defects per 100 units

10.0 Total (major and minor combined) defects per 100 units.

4.4 Tests. The method of testing specified in Specification CCC-T-191, wherever applicable, and as listed in table II shall be followed.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Level A.

Table II. Test methods

Characteristic	Reference Requirement	Test Method
Thread, color fastness		
Clorine bleaching	3.2.4	4600
Laundering	3.2.4	4610
Cloth		
Weight of cloth, coated	Table I	5041
Tearing strength	Table I	5132
Water-resistance, hydrostatic method	Table I	5512
Resistance to blocking	Table I	5872
Low-temperature effect	Table I	5874
Adhesion of coating	Table I	5970
Accelerated aging of cloth	3.2.2.2	5852

5.1.1.1 Unit package. Each bag shall be wrapped with kraft paper of suitable weight. Wrapping shall be adequately secured to prevent accidental opening.

5.1.1.2 Intermediate package. Ten bags, wrapped as specified, shall be packaged in a fiberboard box constructed and closed to conform to class 2, W5c or W5s, style RSC of Specification PPP-B-636.

5.1.2 Level C. Bags shall be packaged in accordance with the manufacturer's normal practice.

5.2 Packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Twenty-four fiberboard boxes (240 bags, packaged as specified in 5.1.1) shall be packed within a snug-fitting shipping container constructed and closed in accordance with class 2, V3c or V3s, style RSC of Specification PPP-B-636, except that strapping will not be required.

5.2.1.1 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design acceptable to a common carrier, which will insure safe delivery to destination.

5.2.2 Level C. Bags, packaged as specified in 5.1.2, shall be packed in a manner acceptable to common carriers for safe transportation to point of destination specified in shipping instructions at the lowest transportation rate for such supplies.

5.3 Marking. Interior packages and shipping containers shall be marked in accordance with Standard MIL-STD-129.

6. NOTES.

6.1 Intended use. The bag covered by this specification is used at a patient's bedside to contain allowed personal effects and toilet articles in a convenient and orderly manner during the time the patient is undergoing treatment in a medical field installation. A blank label shall be provided on the front of the bag on which the patient's identification and any other desired information can be written at the time the bag is issued to the patient.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Stock number.

(c) Both the level of packaging and the level of packing required (see 5.1 and 5.2).

6.3 For access to a standard shade sample of coating-quality cotton sheeting cloth, and tape, and a standard sample of thread, address the procuring office issuing the invitation for bids.

6.4 Bag. Patient's Effects, weighs approximately 4 ounces.

6.5 This specification covers the following item appearing in the Armed Services Medical Stock List:

6530-715-0915 BAG, PATIENT'S EFFECTS.

Notice. When Government drawings, specifications, or other data are used

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.


for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army - Quartermaster Corps
Navy - Bureau of Medicine and Surgery


Other interest:
Army - M

Preparing activity:
Army - Quartermaster Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

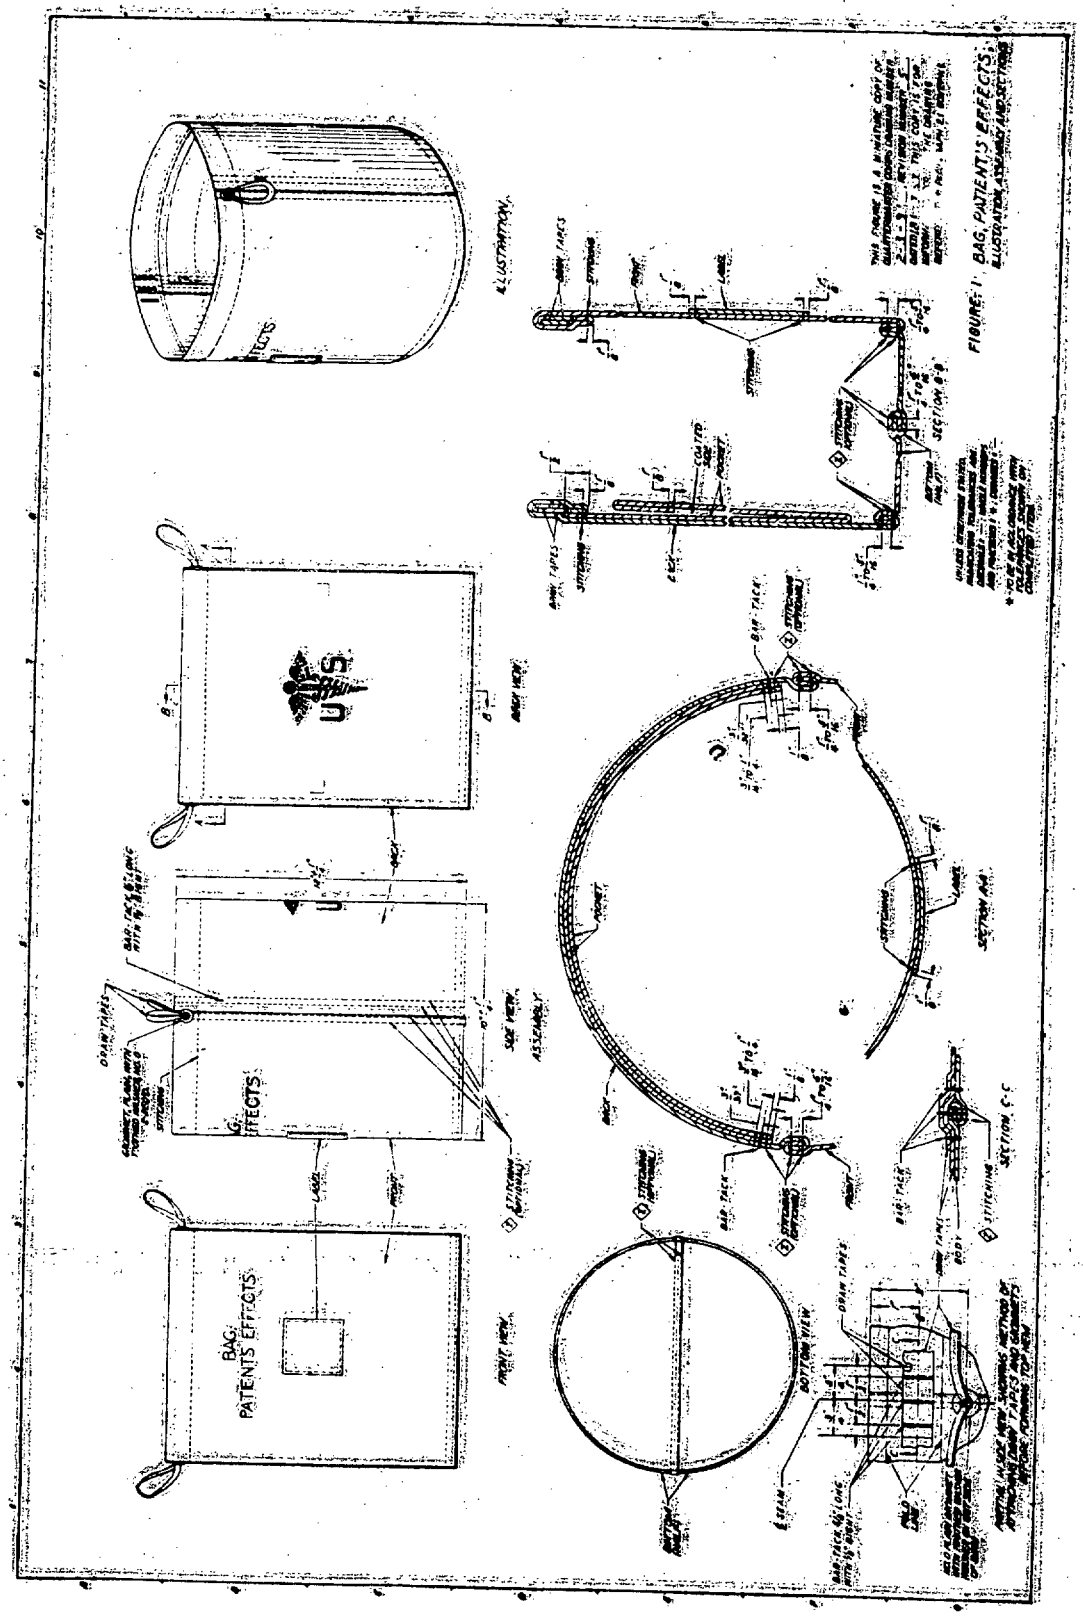

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

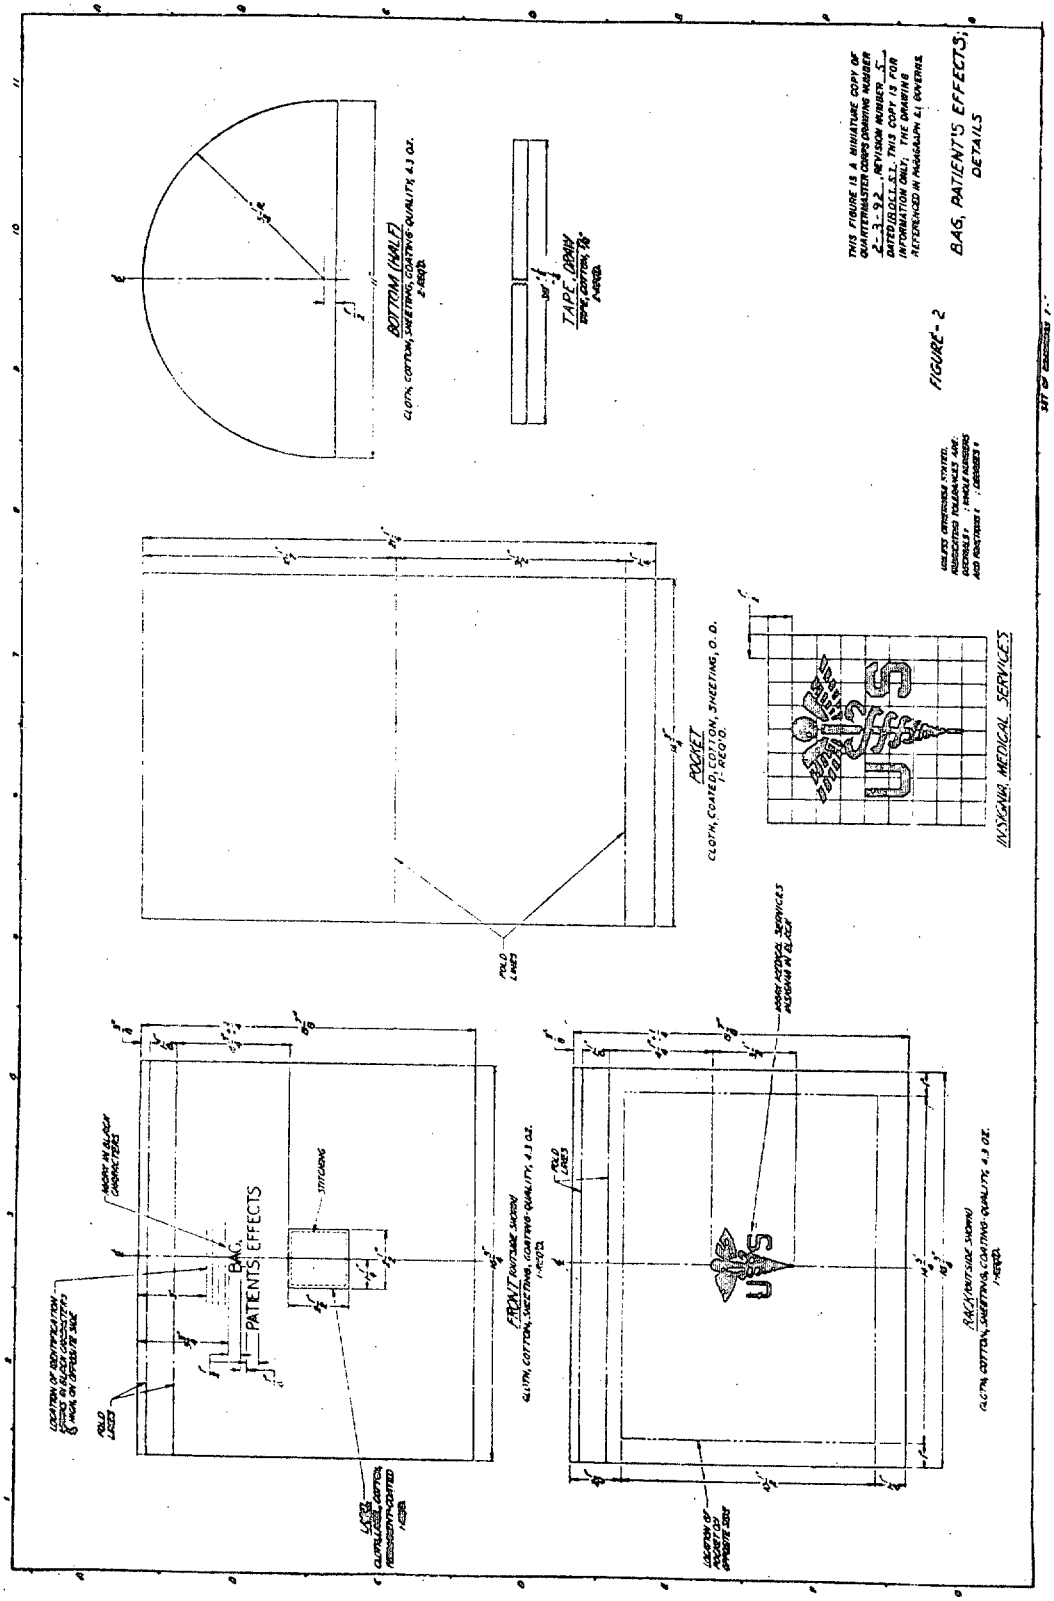

☆ U. S. GOVERNMENT PRINTING OFFICE: 442007—1958—(S-38)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T15:11Z
Check the source to verify that this is the current version before use.