MIL-D-2525D(MC)
29 December 1972
SUPERSEDING
MIL-D-2525C(MC)
13 December 1966

MILITARY SPECIFICATION
DRAWERS, MEN'S: COTTON, ANKLE LENGTH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for ankle length cotton drawers.

1.2 Classification. The drawers shall be of one type in the following classes and sizes as specified (see 6.2):

Class 1 - Natural (unbleached)
Class 2 - Olive Green 109

Schedule of sizes
Small
Medium
Large
X-Large
XX-Large

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
JJ-W-155	- Webbing, Textile, (Cotton, Elastic).
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
CCC-C-444	- Cloth, Jean, Cotton.
DDD-L-20	- Label, For Clothing, Equipage, And Tentage, (General Use).
DDD-T-86	- Tape, Textile, Cotton, General Purpose, (Unbleached, Bleached Or Dyed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757 - Boxes, Fiber, Corrugated (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods.
FED-STD-751 - Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129 - Marking For Shipment And Storage.
MIL-STD-1491 - Glossary of Knitting Imperfections.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished drawers specified by the procuring activity (see 6.2) shall be submitted, or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of the specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

3.3 Materials.

*3.3.1 Cotton yarn. The knitting yarns shall be carded and evenly spun from a suitable grade and staple of cotton so as to meet the requirements specified herein.

3.3.2 Fabric. The fabric for the body, gussets, and anklets shall be 1 by 1 rib circular knit with not less than 22 wales and 30 courses per inch. The fabric shall be knit so that the finished drawers conform to the requirements specified in 3.7.

*3.3.2.1 Bursting strength. The knitted fabric of the finished drawers shall have a bursting strength of not less than 80 pounds when tested as specified in Section 4, Table IV.

*3.3.2.2 Shrinkage. All of the knitted fabric shall be preshrunk by a mechanical shrinking process before being cut into garments. The finished drawers shall not shrink nor elongate more than 12.0 percent in measurements A and E, Figure 1, when tested as specified in Section 4, Table IV. The preshrinking process used shall not be identified by name or trademark on the drawers or package.

3.3.2.3 Finish. The knitted fabric for the class 1 drawers shall be finished natural (unbleached) and shall be lightly scoured in accordance with the following formula:

> Based on the weight of the fabric, 1 percent soda ash and 1 percent neutral chip soap shall be used. The fabric shall be scoured for 30 minutes at a temperature of 140°F. Rinse with lukewarm water. The ratio of fabric to liquor in the scouring operation on the reel machine may be the same as that being used with normal method of scouring.

*3.3.2.4 Color. The color of the knitted fabric for class 1 drawers shall be natural (unbleached). The color of the knitted fabric for class 2 drawers shall be olive green 109 and shall match the standard sample. The use of sulfur dyes and dyes containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyestuffs shall be chosen and applied so that the dyed drawers shall show no more free or sulfide sulfur than the standard sample when tested as specified in Section 4, Table IV.

3.3.2.4.1 Matching. The color of the dyed fabric for class 2 drawers shall match the standard sample under natural (north sky) daylight, or artifical daylight having a color temperature of 7500° Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800° Kelvin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

*3.3.2.4.2 Colorfastness. The dyed fabric shall show fastness to laundering, chlorine bleaching, perspiration and crocking equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed fabric shall show good fastness to laundering, chlorine bleaching, perspiration and crocking. Testing shall be as specified in Section 4, Table IV.

*3.3.3 Thread. The cotton thread for seaming and stitching shall be ticket numbers 60 and 70, 3 ply, conforming to type IA1 (for class 1 drawers) or type IA3 (for class 2 drawers) of V-T-276. The color of the thread for class 1 drawers shall be natural. The thread for the class 2 drawers shall be dyed olive drab shade S-1, cable number 66022 and shall show fastness to laundering, chlorine bleaching, and perspiration equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed thread shall show good fastness to laundering, chlorine bleaching and perspiration.

*3.3.3.1 Sewing yarn. The cover and looper threads used with stitch type 606 shall be combed peeler cotton sewing yarn conforming to the requirements listed below. The color of the yarn for class 1 drawers shall be natural (unbleached). The yarn for class 2 drawers shall be dyed olive drab shade S-1, cable number 66022, and shall show fastness to laundering, chlorine bleaching, and perspiration equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed yarn shall show good fastness to laundering, chlorine bleaching and perspiration. Testing shall be as specified in Section 4, Table III.

Yarn size	Yards per lb. (minimum)	Breaking strength (lbs) (minimum)
30/2	11,000	1.65
28/1	21,000	0.50
160-2	21,000	0.90

*3.3.4 Facing for front fly panels. The front fly panels shall be faced with either jean cloth or tape as follows.

*3.3.4.1 Jean cloth. The jean cloth for facing the front fly panels shall conform to CCC-C-444 except that the cloth for the class 1 drawers shall be unbleached and the requirements for nonfibrous materials shall not apply. The cloth for the class 2 drawers shall be dyed olive green 109 and shall show fastness to laundering, chlorine bleaching, perspiration and crocking equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed cloth shall show good fastness to laundering, chlorine bleaching, perspiration and crocking. Testing shall be as specified in Section 4, Table III.

*3.3.4.2 Tape. The tape for facing the front fly panels shall be 1-1/4 inches wide, conforming to type I, class 1 (for class 1 drawers) or type I, class 3 (for class 2 drawers) of DDD-T-86. The color of the type I, class 3 tape shall be olive drab, cable No. 66519, shade S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

*3.3.5 Elastic webbing. The webbing for making the waistband shall conform to type I, class 10 of JJ-W-155. The color of the webbing for the class 1 drawers shall be natural (unbleached). The color of the webbing for the class 2 drawers shall be olive green 109.

*3.3.6 Label. Each of the drawers shall have a combination identification and size label conforming to type I, class 4 of DDD-L-20. The end item is intended to be laundered and the label shall show fastness to laundering.

*3.4 Design. The drawers shall be the design shown on Figure 1, ankle length with an elastic waistband.

*3.5 Construction.

*3.5.1 Manufacturing requirements. The drawers shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.5.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the drawers.

*3.5.1.2 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. Sewing thread sizes are given with the ticket number and ply separated by a dash, as 60-3. Yarn sizes are followed by a slash mark and the ply, as 30/2. Where type 606 stitch is specified, the looper thread may be a 28/1 yarn or a 160/2 thread.

*3.5.1.2.1 Ends of seams and thread breaks. End of seams and stitching, except a continuous row of stitching, produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Cover Thread	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
						Needle	Bobbin or Looper
1.	Cutting. a. Cut fabric for drawers. The anklets and gusset shall be cut so that they may be folded to form a double thickness of the knitted fabric with wales running perpendicular to the folded edge, all other knitted parts of the drawers shall be cut lengthwise in the direction of the wales. b. Cut the elastic webbing into the various size lengths as follows: Small 26-1/4; Medium 30-1/4; Large 34-1/4; Extra Large 38-1/4; Extra Extra Large 42-1/4. All measurements are in inches with a tolerance of ±1/4 inch. c. The jean cloth specified in 3.3.4 for reinforcing both fly panels shall be cut in the direction of the warp and shall finish 1-1/4 ±1/8 inches wide.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages which may affect						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Cover Thread	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
						Needle	Bobbin or Looper
2.	Replacement of damaged parts. (cont'd)						
	appearance or serviceability of the end item shall be excluded and replaced with nondefective and properly matched material.						
3.	Attach anklets.						
	a. Fold anklet to form a double thickness with wales running perpendicular to the folded edge.						
	b. Lap the double ply rib - knit fabric over the bottom edge of each leg 1/4 ±1/16 inch and stitch with the wales of the cloth perpendicular to the anklet seam.	60-3	604	LSa-1	12-16	60-3	Lower 60-3 Upper 60-3
				OR			
		60-3	605	LSa-1	12-16	60-3	Lower 60-3 Upper 60-3
4.	Make front fly panels						
	a. Seam tape specified in 3.3.4.2 or jean cloth specified in 3.3.4.1, face up, along the edge of the underside of each fly panel, 1-1/8 ±1/16 inches from edge, folding in any raw edges, except the tape edges shall not be turned in. The facing shall finish 1-1/4 ±1/8 inches wide.		301	LSk-2	12-16	60-3	60-3
			or				
			401	LSk-2	12-16	60-3	70-3
	b. Overlap the left front panel over the right front panel 1-1/2 ±1/8 inches.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Cover Thread	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
						Needle	Bobbin or Looper
4.	Make front fly panels. (cont'd)						
	c. Secure fly at the bottom by stitching through both fly panels a rectangular box 1-3/4 ±1/8 inches long and 1 ±1/8 inches wide.		301	LSa-1 and SSa-1	12-16	60-3	60-3
					12-16	60-3	60-3
			or 401	LSa-1 and SSa-1	12-16	60-3	60-3
					12-16	60-3	70-3
	d. Secure the top portion of the fly by stitching through both fly panels a rectangular box, 1 ±1/8 inches wide. The top of the box shall be caught at the top edge of the fly and the bottom of the box shall be stitched 8 ±1/4 inches from the bottom of the fly. When completed, the fly opening shall measure 6 ±1/4 inches.		301	LSa-1 and SSa-1	12-16	60-3	60-3
			or 401		12-16	60-3	60-3
				LSa-1 and SSa-1	12-16	60-3	60-3
					12-16	60-3	70-3
5.	Make gusset.						
	a. The center portion of the gusset shall be a double thickness of the fabric.						
	b. Lap and seam the two wings to the center portion of the gusset as shown on Figure 1.	60-3	604 or	LSa-1	12-16	60-3	60-3
		60-3	605 or	LSa-1	12-16	60-3	60-3
		30/2	606	FSa-1	12-16	70-3	28/1
6.	Insert gusset.						
	Seam assembled gusset to front of drawers catching bottoms of left and right fly panels in the joining seam.	60-3	604 or	LSa-1	12-16	60-3	60-3
		60-3	605 or	LSa-1	12-16	60-3	60-3
		30/2	606	FSa-1	12-16	70-3	28/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Cover Thread	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
						Needle	Bobbin or Looper
7.	Close legs and seat.						
	Seam from bottom edge of anklet, up leg and crotch gusset to top of waistband. Close opposite leg by seaming from bottom of anklet up leg and crotch gussets to extreme top of seat gusset.	60-3	604 or	LSa-1	12-16	60-3	60-3
		60-3	605 or	LSa-1	12-16	60-3	60-3
		30/2	606	FSa-1	12-16	70-3	28/1
8.	Make elastic waistband.						
	Seam ends of waistband. Note: May be performed before or after joining elastic waistband to drawers.	30/2	606 or	FSa-1	12-16	70-3	28/1
		30/2	607	FSa-1	12-16	70-3	70-3
9.	Attach elastic waistband.						
	Attach elastic waistband, equally distributing knit fabric gathers around circumference of waistband.		407	LSa-1	12-16	60-3	60-3
10.	Tacking.						
	The stitching chain at bottom of anklet shall be turned under 1/2 ±1/16 inch and tacked parallel to seam, beginning 1/8 ±1/16 inch from bottom edge of anklet with the tack extending 1/2 ±1/8 inch to secure and cover the turnback of stitching chain.		304		12-16 Stitches per tack	60-3	60-3
	a. The turned under ends of the stitching chain may be bartacked. The bartacks shall be 1/2 inch long.	Bartack			28 per Bartack	60-3	60-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Cover Thread	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
						Needle	Bobbin or Looper
11.	Attach label.						
	a. Place label on the inside back of the drawers with top edge aligned with the top edge of the elastic waistband. The waistband closing seam shall be fully closed and centered to the right and left vertical edges of the label.						
	b. Stitch label on all four sides approximately 1/16 inch from the edge.		301		12-16	60-3	60-3
12.	Clean drawers.						
	Trim raw edges, ends of threads and stitching inside and outside the garment. Remove all spots and stains.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

*3.7 Measurements and weights. The finished drawers shall conform to the measurements and weights specified in Table II. Measurements shall be made with the drawers laid out flat, under no tension.

Table II - Finished measurements (inches) and weights

	Refer to Figure 1	S	M	L	XL	XXL	Tolerance
Total length	A	43-3/4	45-1/4	46-3/4	46-3/4	46-3/4	±1
Waist 1/	B	13	15	17	19	21	±1/2
Front rise	C	14	14-1/2	15	15-1/2	16-1/4	±3/4
Back rise	D	15-3/4	16-1/4	16-3/4	17-1/4	18	±3/4
Seat width	E	16	18	20	22	25	±1
Thigh width 2/	F	9	10	11	11-3/4	12-1/2	±1/2
Calf width 3/	G	6	6-1/4	6-1/2	6-7/8	7-1/4	±1/2
Fly opening length	H	6	6	6	6	6	±1/2
Anklet length	I	5-1/2	5-1/2	5-1/2	5-1/2	5-1/2	±1/2
Anklet width 4/	J	4	4	4	4	4	±1/2
Conditioned weight per dozen (lbs)		6-1/2	7	7-3/4	8-1/4	9	Minimum

1/ Measurement shall be made with the drawers laid flat in a relaxed condition, face up.
2/ Measurement shall be made across bottom edge of front rise.
3/ Measurement shall be made 10 inches from bottom anklet.
4/ Measurement shall be made at center of anklet.

*3.8 Workmanship. The finished drawers shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQL).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article inspection. When first article is required, inspection shall be made of a completely fabricated pair of drawers for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards, testing shall be performed on components listed in Table III for characteristics noted. Wherever applicable, tests shall be conducted in accordance with FED-STD-191. When the data in the number of determinations per sample unit and results reported as columns are not specified in Table III, they shall be as required by the referenced test method. All test reports shall contain the individual values utilized in expressing the final results.

*4.2.2.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Jean cloth	yard	1 yard
Sewing thread	pound	1 pound

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

TABLE III. - Component tests

Characteristic	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as:
Sewing Yarn	3.3.3.1	Visual	1	Pass or fail
Ply	3.3.3.1	4020		
Yarn No.	3.3.3.1	4010		
Yards per lb.	3.3.3.1	4100		
Breaking Strength	3.3.3.1	Std Com'l 1/		
Combed peeler cotton				
Colorfastness (of dyed yarn) to:				
Laundering	3.3.3.1	5610		
Chlorine Bleaching	3.3.3.1	5600		
Perspiration	3.3.3.1	5680		
Jean Cloth				
Colorfastness (of dyed jean cloth) to:				
Laundering	3.3.4.1	5610		
Chlorine Bleaching	3.3.4.1	5600		
Perspiration	3.3.4.1	5680		
Crocking	3.3.4.1	5651		

1/ A supplier's certification of compliance may be accepted as evidence of conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

*4.2.3 Examination of end item. The end item shall be examined for defects listed in 4.2.3.1 and 4.2.3.2. The sample unit shall be one finished pair of drawers.

*4.2.3.1 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major	Minor
Material defects and damages	a. Hole, cut, tear, burn, run or dropped stitch.	X	
	b. Slubby yarn - any yarn more than twice the size of normal yarn.		X
	c. Any snagged yarn.		X
	d. Cockled fabric.		X
	e. Needle chew.	X	
	f. Any thin area or mend.	X	
	g. Foreign matter (knit in fabric or spun in yarn). 1/		X
	h. Any imbedded crease in fabric	X	
	i. Any burr or shive	X	
	j. Rowey yarn or tiger stripes, loose knitting, causing sleaziness.		X
NOTE: See MIL-STD-1491 for defect definitions.			
Shade	a. Other than color specified.	X	
	b. Parts shaded or off shade (Class 2 only).	X	
	c. Streaks, clearly visible. 1/	X	
	d. Any striation or shade bar.	X	
Cleaness	a. Any spot or stain. 1/		X
	b. Two or more untrimmed ends more than 1 inch in length.		X
	c. Rancid bad odor.	X	

1/ Clearly visible at 3 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Cutting	Any component part not cut in conformance with directions cited in Table I.		X
Components and assembly	a. Any component part or required operation omitted or added (unless otherwise classified herein).	X	
	b. Any operation not performed as specified (unless otherwise classified herein).		X
Seams and stitching	a. Any seam twisted, puckered or pulled.		X
	b. Needle chew.	X	
	c. Any part of garment badly pleated or caught in any unrelated row of stitching.	X	
	d. Thread breaks backtacked less than 1/2 inch.		X
	e. Any open seam on hem 1/2 inch or more.		X
	f. Any open seam (except on hem).	X	

NOTE: A seam shall be considered as being open when one or more stitches joining a seam are broken, or when two or more successive skipped stitches occur.

	g. Wrong seam or stitch type.	X	
	h. Seam twisted or puckered on inside.		X
	i. End of seam or stitching produced with 301 stitch type, when not caught in other seam or stitching, backtacked less than 1/4 inch.		X
	j. Thread break (all stitch types) not backstitched.	X	
	k. Thread break (all stitch types) backstitched less than 1/2 inch.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Raw edges	Any untrimmed seam more than 1/8 inch from stitching line.		
	- 1/8 to 3/8 inch inclusive		X
	- More than 3/8 inch	X	
Stitch tension	a. Loose tension, resulting in a loosely secured seam.	X	
	b. Tight tension (stitching breaks when normal strain is applied to the seam or stitching).	X	
Stitches per inch	Number of stitches per inch less than specified minimum or more than specified maximum.		X
Anklet or gusset	Not double thickness.	X	
Tack	Any tack omitted or insecure, any end of seam not secured.	X	
Label or marking	Missing, incorrect, illegible, misplaced, not properly attached, not required size.		X

*4.2.3.2 Finished measurements. The finished drawers shall be examined for measurement defects as follows:

(a) Any measurement defect more than the minimum or less than the maximum specified dimension and tolerance.

(b) Pair components uneven by more than 1/2 inch.

*4.2.3.3 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.1

Inspection level II of MIL-STD-105

Major	2.5 DHU
Total Major and Minor	10.0 DHU

4.2.3.2

Inspection level S-3 of MIL-STD-105

One class	4.0 DHU

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Weight or content (exterior and interior)	Number of bundles is more or less than required. Number of garments per bundle is more or less than required. For this defect, two bundles from each container in the sample shall be examined.

*4.3 Testing of the end item. The methods of testing specified in FED-STD-191, wherever applicable, and as listed in Table IV shall be followed. When the data in the number of determinations per sample unit and results reported as columns are not specified in Table IV, they shall be as required by the referenced test method. Unless otherwise indicated, the physical and chemical values specified in Section 3 apply to the averages of the determinations made on a sample unit for test purposes as specified in the applicable test methods. The lot size shall be expressed in units of one individual garment. For the weight characteristic, the sample size, regardless of the lot size, shall be one dozen garments of each size in the lot and the acceptance number shall be zero. The sample unit for test purposes, except for weight, shall be three garments from each size in the lot for determination of shrinkage or elongation and one garment (any size in lot) for all physical and chemical tests. The sample size (number of sample units) shall be in accordance with 4.2.2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

Table IV - Test methods

Characteristic	Rqmt. para.	Test method	No. Determination per sample unit	Results reported as:
Type of knit	3.3.2	Visual	1	Pass or fail
Wales and courses	3.3.2	5070		
Bursting strength	3.3.2.1	5120		
Shrinkage in laundering 1/	3.3.2.2	7556		
Scouring	3.3.2.3		1	Pass or fail
Presence of sulfur 2/ (class 2 only)	3.3.2.4	2020	1	Pass or fail
Colorfastness (for class 2):				
Laundering	3.3.2.4.2	5610		
Chlorine bleaching	3.3.2.4.2	5600		
Perspiration	3.3.2.4.2	5680		
Crocking	3.3.2.4.2	5651		
Weights per dozen (conditioned)	Table II	Scale	1	To nearest 0.1 lb.

1/ Garments shall not be moistened or pressed before measuring. The garments shall be conditioned after drying for 1 hour in a relaxed supported state before measuring. Measurements shall be taken to the nearest 0.1 of an inch with garment laid flat as shown on Figure 1. Shrinkage or elongation shall be reported to the nearest 0.1 percent. Elongation shall be reported prefixed with a minus (-) sign.

2/ A supplier's certification of compliance may be accepted as evidence of conformance.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of drawers shall be neatly folded to measure approximately 14-1/2 by 7-1/2 inches. Five folded drawers, of one size only, shall be neatly stacked in a bundle and securely tied with cotton tape or twine approximately 4 inches from each end.

5.1.2 Level C. Drawers shall be packaged in accordance with the industry's practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Forty-five (45) pairs of drawers of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, conforming to class weather resistant, size No. 3A of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

*5.2.1.2 Method 2. When specified (see 6.2), three level B shipping containers (135 drawers of one class and size only) shall be packed in a fiberboard shipping container conforming to class weather resistant, size No. 4 of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix thereto. Toward the end of the contract, or when there is less than the required amount of the same size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.2 Level B. Forty-five (45) pairs of drawers of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class domestic, grade 275, size No. 3A of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract, or when there is less than the required amount of the size per container, mixed sizes may be packed within the same shipping container (see 5.3.1).

*5.2.3 Level C. Drawers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies, Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side a white paper label,5 by 4 inches, with the words "MIXED SIZES" plainly printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

*6.1 Intended use. The drawers described herein are intended for use by personnel of the Marine Corps as an item for cold climate.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of drawers in first article (see 3.2)
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When level B, method 2 packing is required (see 5.2.2.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Description DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

*6.3 Samples and shade samples. For information regarding the availability of sample of the drawers and the standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - MC
Project No. 8420-N052

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

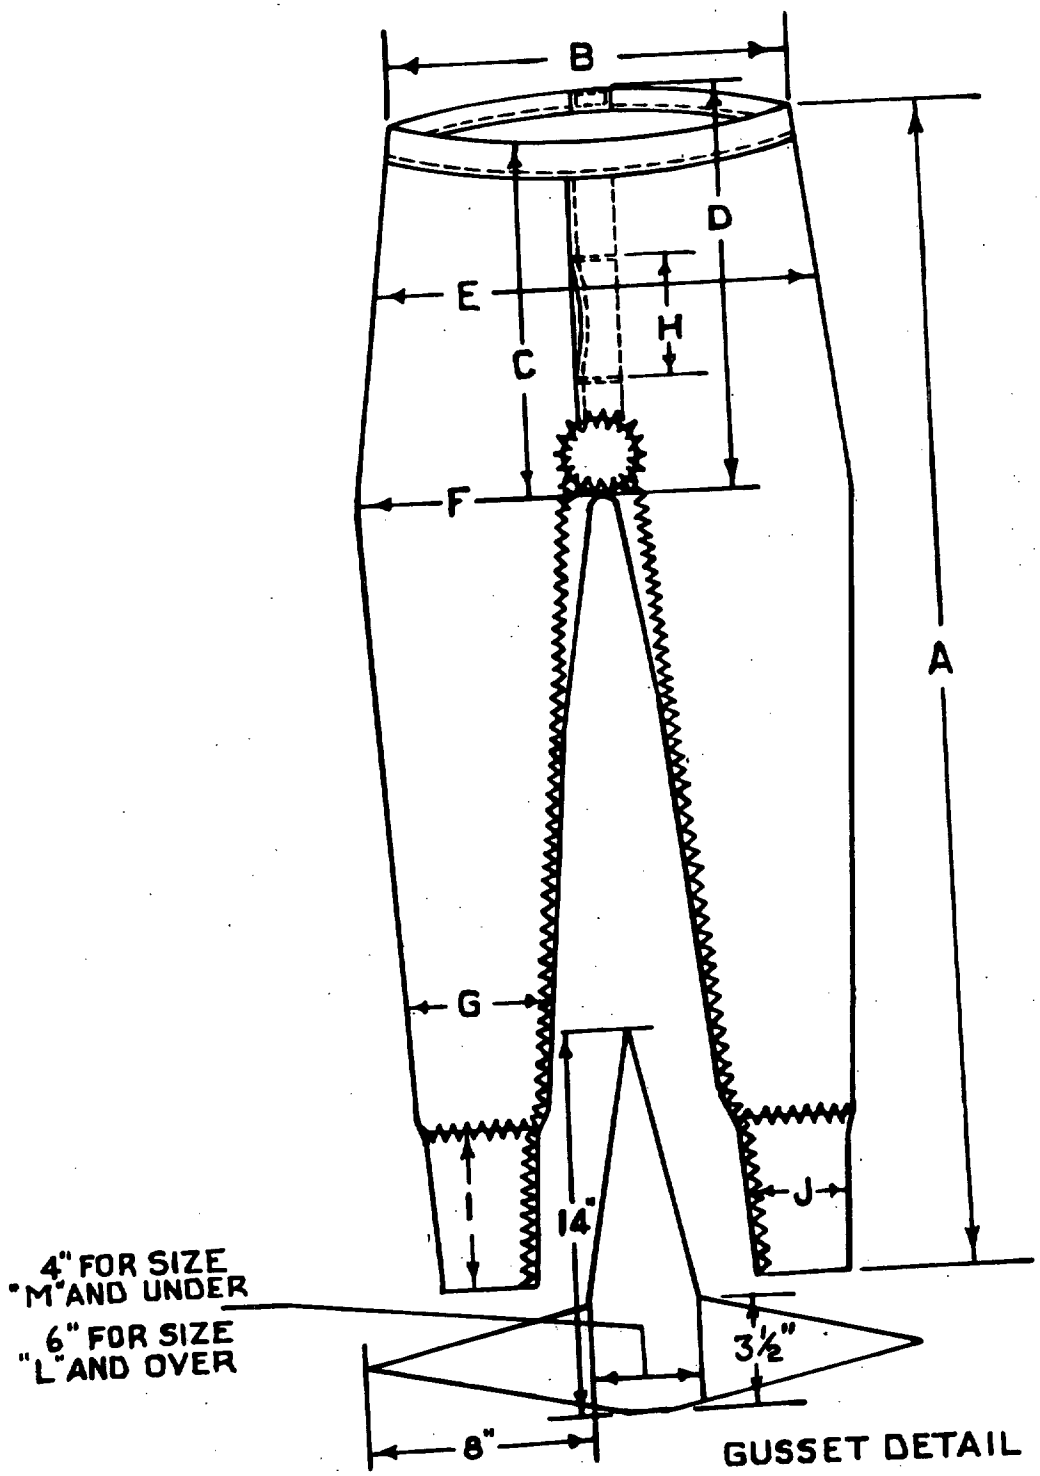


FIGURE 1. DRAWERS, COTTON, ANKLE LENGTH

M.C.S.A.
826: R,G.F.
29 Dec '72

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DoD-31

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:05Z
Check the source to verify that this is the current version before use.