28 October 1968
SUPERSEDING
MIL-S-2609C
31 December 1963

MILITARY SPECIFICATION

SIGN BOX, INTERIOR ILLUMINATED, ELECTRIC

(4 INCH BY 15 INCH MESSAGE)

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of self-illuminated sign (or message) box with vehicle mount.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

C-F-206	-	Felt, Sheet, Wool, Pressed.
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon.
QQ-T-830	-	Tube, Steel, (Carbon, Mechanical; Seamless and Welded).
TT-E-489	-	Enamel, Alkyd, Gloss (for Exterior and Interior Surfaces).
TT-E-527	-	Enamel, Alkyd, Lusterless.
UU-P-288	-	Paper, Ledger, Unruled.
MMM-A-188	-	Adhesive; Urea-Resin Type (Liquid and Powder).
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Box, Fiberboard.

MILITARY

MIL-B-18/9	-	Battery, Dry, BA-30.
MIL-T-704	-	Treatment and Painting of Material.
MIL-I-3606	-	Ink, Printing, Lithographic Offset, With Drier.
MIL-P-8184	-	Plastic Sheet, Acrylic, Modified.
MIL-C-14550	-	Copper Plating (Electrodeposited).

FSC 9905

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-108	-	Definitions of Basic Requirements for Enclosures for Electric and Electronic Equipment.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MS 27183	-	Washer, Flat, Round, Steel Cadmium Plated, General Purpose.
MS 35494	-	Screw, Wood, Flat Head, Slotted, Steel and Brass.
MS 35495	-	Screw, Wood, Round Head, Slotted, Steel and Brass.

DRAWINGS

ARMY NATICK LABORATORIES

5-7-94	-	Sign Box, Interior Illuminated, Electric (4 Inch by 15 Inch Message); Assembly Complete.
5-7-95	-	Sign Box, Assembly.
5-7-96	-	Base Assembly.
5-7-97	-	Sign Box, Details A.
5-7-98	-	Sign Box, Details B.

(Miniature copies of Drawings 5-7-94 through 5-7-98, identified as figures 12 through 16 respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D 2016-62 - Standard Methods of Test for Moisture Content of Wood

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

U. S. DEPARTMENT OF COMMERCE

NATIONAL BUREAU OF STANDARDS

Product Standard PS 1-66 - Softwood Plywood/Construction and Industrial

(Application for copies of the above standard should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the completely fabricated sign box covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

* 3.2 Materials.- materials not definitely specified shall be in accordance with the manufacturer's current commercial practice.

3.2.1 Steel, sheet and strip.- Steel sheet and strip shall conform to commercial quality, cold rolled or hot rolled, as applicable, of QQ-S-698. Temper of steel specified on applicable drawing shall conform to QQ-S-698. Steel with no temper specified shall be in accordance with manufacturer's commercial practice.

* 3.2.2 Plywood.- Plywood shall conform to exterior type, group 1, grade B-B of National Bureau of Standards Product Standard PS 1-66.

3.2.3 Wood.- Wood shall be Douglas Fir, Western Hemlock or Southern Pine, and shall be free from knots, decay, split, checks, holes and warp. The moisture content, at time of fabrication, shall be not less than 12 nor more than 15 percent when tested as specified in 4.3.1.1.

* 3.2.4 Felt.- The felt shall be mildew resistant and conform to type 1, class 12R-1 of C-F-206.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

* 3.2.5 Hardware.- Clamp, clevis, clamp catch, safety clamp catch and rivets shall be standard commercial items, cadmium plated, and shall be as shown on the applicable drawings. The screws and washers shall conform to MS 27183, MS 35494, and MS 35495, as applicable, and as shown on drawings.

* 3.2.6 Adhesive.- The adhesive shall be either resin type or vinyl emulsion type as specified in MMM-A-188.

3.2.7 Tube, steel.- Steel tube shall be round, seamless, cold drawn, or welded or hot rolled, low carbon steel as specified in QQ-T-830.

* 3.2.8 Switch.- The switch shall be of the momentary-contact, push button type, with contacts closed when the push button is in the "out" position. The switch shall extinguish the lamps when actuated by the closing of the hood. The switch shaft shall be of corrosion-resisting material.

3.2.9 Plastic sheet.- The plastic sheet shall be a clear, transparent plastic, not less than 1/16 inch thick and conforming to finish A of MIL-P-8184.

3.2.10 Enamel.-

3.2.10.1 Olive drab.- The enamel shall conform to TT-E-527 and shall be lusterless, olive drab, Color Number X34087 of Fed. Std. No. 595.

3.2.10.2 White.- The enamel shall conform to TT-E-489 and shall be a gloss white, Color Number 17875 of Fed. Std. No. 595.

* 3.2.11 Lamps.- The lamps shall conform to type 1800 as specified on Drawing 5-7-95, or any equivalent commercial type lamp.

* 3.2.12 Copper plating.- The copper plating for the lamp assembly strip and battery strips shall be in accordance with class 3 of MIL-C-14550.

3.3 Design and construction.- The sign box with vehicle mount shall be in accordance with Drawings 5-7-94, 5-7-95, 5-7-96 5-7-97, 5-7-98, and as specified herein.

3.3.1 Handle, hood and message frame.- The handle, hood and message frame shall be fabricated of steel specified in 3.2.1.

3.3.2 Box, plywood.- The sign box shall be fabricated of plywood specified in 3.2.2 and in accordance with the applicable drawings.

3.3.3 Vehicle mount (base).- The vehicle mount (base) shall be made of wood specified in 3.2.3 and fashioned in accordance with Drawing 5-7-96. Mounting to a vehicle shall be accomplished by means of clamps or bolts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

3.3.4 Window.- The window shall be fabricated of plastic specified in 3.2.9. The window shall be free from holes, wrinkles or creases and shall be clear and transparent.

* 3.3.5 Battery strips.- The battery strips shall hold the batteries securely in place. The battery strips shall be constructed of the material specified in 3.2.1 and 3.2.12.

* 3.3.6 Lamp holders and clips.- The lamp holders shall hold three lamps securely in place. Three lamp clips shall be mounted in the battery compartment to hold three spare lamps. The lamp holders shall be constructed of the material specified in 3.2.1 and 3.2.12.

3.3.7 Messages, letter and number series, and symbols.- Messages, letter and number series, and symbols shall be white with a black background. Printing shall be by the lithograph or equal process on white ledger paper conforming to UU-P-288, type II, 48 pounds. The ink for the background shall conform to MIL-I-3606. Messages, letters, number series, symbols and miscellaneous paper items (see 3.3.7.1, 3.3.7.2 and 3.3.7.3) shall be rolled and bound to fit the battery compartment.

3.3.7.1 Messages and symbols.- The following messages and symbols, in the quantities indicated, shall be constructed from letters and symbols conforming in size to figures 1 through 7, and 10 and 11 respectively. Spacing between the letters shall be 3/4 inch plus or minus 1/4 inch, except that in the message "R.R.", the spacing shall be 2 inches. The length of each message from end to end of the letters shall be not more than 14-1/2 inches. The message "DETOUR" shall be photographically reduced to a length of 14-1/2 inches.

Item	Quantity
STOP	1 each
DETOUR	1 each
BRIDGE	1 each
SLOW	1 each
TURN	1 each
GAS	1 each
HILL	1 each
R.R.	1 each
WATER	1 each
First-aid symbol (cross)	1 each
Armor symbol (triangle)	1 each
13-inch directional arrow	1 each
7-3/4 inch directional arrow	1 each
5-3/4 inch directional arrow	1 each

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

3.3.7.2 Letters, number series and symbols.- The following letters, numbers and symbols, in the quantities indicated, shall be in accordance with figures 1 through 10 and shall be photographically reduced to 2-5/8 inches in height and printed on individual sheets 4 inches high. The spacing bar shall be in accordance with figure 11 and shall be printed on a 4-inch high sheet. Each letter, number and symbol shall be centered on the sheet to provide equal space at top and bottom and a 1/2-inch margin on each side of the letter, number or symbol.

Item	Quantity
Alphabet	2 complete sets
Number series (0 to 9)	4 complete sets
Roman numeral series (I, V, and X)	3 of each numeral
Spacing bar	4 each

3.3.7.3 Miscellaneous items.- The following items, in the quantities indicated, shall be included with each sign box:

Item	Quantity
Ledger paper, white (blank) 4-by 15-inch	4 sheets
Ledger paper (colored black by the addition of pigment), 4-by 15-inch	3 sheets
Tape, pressure-sensitive adhesive, cellulose backing, 1/4-inch width	1 roll (300-inch)

* 3.3.8 Operation.- The sign box shall operate with 10 batteries specified in 3.6. With the signs illuminated and the hood up, the signs shall be legible to the unaided eye from a distance of 25 feet in total darkness when tested as specified in 4.4.1.

3.3.9 Mechanical strength.- When tested as specified in 4.4.2, the sign box shall show no damage. Damage is defined as split, cracked or broken sections of the sign box, or failure of any part of the electrical system to operate.

3.3.10 Water spray.- The sign box shall be spray-tight to the extent that there shall be no failure of the electrical system when tested as specified in 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

3.4 Finish.- Finish for components not specifically covered hereinafter shall be finished in accordance with the manufacturer's standard commercial practice.

3.4.1 Treatment and painting.- The sign box and vehicle mount, except as hereinafter specified, shall be treated and shall have a primer coating in accordance with type A of MIL-T-704.

3.4.2 Enameling.- The finish coat of the sign box and vehicle mount shall be lusterless, olive drab enamel as specified in 3.2.10.1. The finish coat of the interior surface of the light chamber shall be gloss white enamel as specified in 3.2.10.2. All paint shall completely dry out and shall not be tacky.

3.5 Identification marking.- The sign box and vehicle mount shall be permanently and legibly marked with the letters "U.S.", manufacturer's name or trademark of such known character or markings as to be readily identifiable with the manufacturer, and shall be in accordance with MIL-STD-130.

3.6 Government furnished equipment.- Ten batteries required to illuminate the sign box shall conform to type BA-30 of MIL-B-18/9 and shall be furnished by the Government (see 6.3).

3.7 Operation instructions.- Operation instructions shall be plainly legible and permanently affixed to the interior of the sign box. Instructions shall include the following information: 10 batteries - 1-1/2 volts, type BA-30.

* 3.8 Workmanship.- Wood components shall be free of splinters or rough edges. Metal components shall be free of sharp edges, burrs or splinters; the enamel shall show no sags, runs, blisters or areas of no film. The plastic window shall show no cracks, holes or poor fit in frame.

* 3.8.1 Electrical wiring.- Wiring shall not be cut, abraded, or have excessive insulation stripped, and shall be properly and tightly joined at terminals. Wiring shall have adequate slack to have strain relief.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects in 4.3.3.1, dimensions specified, and tested in accordance with 4.4.1, 4.4.2 and 4.4.3.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 Moisture content.- Tests shall be performed on each lot of lumber, at time of fabrication, for moisture content in accordance with ASTM D 2016-62. Three determinations shall be taken on each sample unit and the results shall be the average of the three determinations. The sample unit shall be one piece of lumber. The inspection level shall be S-2 with an acceptable quality level (AQL) of 2.5, expressed in terms of defects per hundred units.

4.3.2 In-process inspection.- Inspection shall be made during the manufacturing process to determine that treatment and priming is in accordance with MIL-T-704.

4.3.3 End item inspection.- The lot shall consist of all complete sign boxes offered for inspection at one time. The sample unit shall be one completely fabricated sign box.

* 4.3.3.1 Visual examination.- The end item shall be examined for the defects listed in table I. The inspection level shall be level I with an AQL of 2.5 for major defects, and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish (vehicle mount)	Not color specified.		X
	Not dry (tacky).		X
	Base not smoothly surfaced or sanded.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Workmanship	Sharp metal edge, splinters or burr not removed.	X	
	Any loose or insecure attachment.		X
	Construction out of true alignment; box does not set on flat, level smooth surface without rocking.	X	
Sign box (exterior)	Not color specified.		X
	Not dry (tacky); sags, runs or blisters.		X
Sign box (interior light chamber)	Not color specified.	X	
	Not dry (tacky); sags, runs or blisters.		X
Design	Any detail of design not as specified or as shown on drawings.	X	
Construction (vehicle mount)	Missing.	X	
	Safety catch clamp does not hold box securely in place.	X	
	Joints not secured with screws.		X
Sign box	Handle does not fold flat in closed position.	X	
	Handle does not operate through 90 degree angle.	X	
	Not provided with three spare lamps.		X
	Lamps not attached to clips in battery compartment.		X
Wood	Not free from knots, holes, split, shake, checks, decay, warp, splinters or rough edges.	X	
Gasket	Missing.	X	
	Area of no contact.		X
Window	Plastic window contains hole, wrinkle, or crease, and is not clear or transparent or poor fit in frame.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Battery mounting instruction	Missing.	X	
	Not plainly legible and marked on inside of case.		X
Hardware	Missing.	X	
	Not type specified.		X
	Not cadmium plated.		X
Rivets, screws and washers	Not cadmium plated.		X
	Not the specified number of rivets, screws and washers as shown on applicable drawings.		X
Switch	Not type specified.	X	
Messages, letters, numbers, symbols, blank sheets	Not quantity specified.		X
	Characters not white.	X	
	Background not black.	X	
	Characters not specified design.	X	
	Not rolled (where required).		X
	Will not fit in battery compartment.	X	
Electrical wiring	Cut, abraded, or excessive insulation stripped.	X	
	Not properly or tightly joined to terminals.	X	
	Not adequate slack.	X	
Identification marking	Missing, incomplete, not legible.		X

4.3.3.2 Dimensional examination.- Any dimension of the sign box and vehicle mount, including dimensions of messages, letter and number series and symbols specified in 3.3.7 through 3.3.7.3 that is not within the specified requirements shall be classified as a defect. The inspection level shall be S-1 and the AQL 4.0, expressed in terms of defects per hundred units.

4.3.3.3 Testing of end product.- Each sign box shall be tested as specified in 4.4.1. In addition, representative samples shall be tested for the characteristics indicated in table II. The inspection levels and AQL shall be as indicated in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS FOR TESTING

End Product Testing

TABLE II

CHARACTERISTIC	Specification Reference		Requirements Applicable To		Number Determinations Per Unit	Results Reported As		Inspect Level	AQL
	Requirement	Test Method	Individ Unit	Lot Aver		Pass or Fail	Numerically to Nearest		
Mechanical strength	3.3.9	4.4.2	X	-	10 (5 on each of two diagonal corners)	X	-	S-1	2.5
Water spray	3.3.10	4.4.3	X	-	1	X	-	S-1	2.5

AMXRE Form 598
8 February 1965

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

* 4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0, expressed in terms of defects per hundred units.

TABLE III.- Examination of preparation for delivery

Examination	Defect
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Workmanship	Inadequate application of components, such as fiberboard inserts not separating and immobilizing contents of interior box, or bulging or distortion of containers.
Weight	Weight of contents per container is more than specified.

* 4.3.4.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

4.4 Tests.-

* 4.4.1 Operational test.- Each sign box, with 10 batteries installed, shall be operated by turning the switch on and off not less than five times. With the switch in the "ON" position and the hood up, all lamps should light and illuminate the sign in compliance with 3.3.8. Batteries for this test shall be furnished by the supplier.

4.4.2 Mechanical strength test.- The sign box, with batteries installed, shall be dropped a minimum of 10 times from a height of 36 inches onto a concrete floor. The drops shall be made so that five drops will be made on each of two diagonally opposite corners for a total of 10 drops. The switch shall then be turned on and the sign box examined to determine compliance with 3.3.9 and operating requirements of 3.3.8.

4.4.3 Water spray.- The sign box, with batteries installed, shall be subjected to a spray-tight water test in accordance with table II of MIL-STD-108, except that the time duration shall be 1 hour. The electrical power shall be on during the test. Examination shall be made to determine compliance with 3.3.10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Packaging.-

* 5.1.1.1.1 Sign box and vehicle mount.- Components of each sign box, placed as specified in 3.3.7, shall be secured within the sign box. The hood on each sign box shall be folded down against the front. Each sign box and vehicle mount shall then be packaged in a fiberboard box conforming to style RSC, grade V3c or V3s of PPP-B-636. Fiberboard inserts shall be used to prevent contact between, and immobilize, the contents. Each box shall be closed and waterproofed in accordance with the appendix of PPP-B-636.

* 5.1.2 Level C.- Sign boxes and vehicle mounts shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

* 5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Sign boxes and vehicle mounts, packaged as specified in 5.1, shall be packed in a snug-fitting cleated-plywood or nailed wood shipping container conforming to overseas type, style A or J of PPP-B-601 or class 2 or 4 of PPP-B-621. Closure and strapping and weight limitation shall be in accordance with the appendix of the applicable container specification. Shipping containers exceeding 250 pounds gross weight shall be provided with skids in accordance with the appendix of the applicable container specification.

5.2.2 Level B.- Sign boxes and vehicle mounts, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636. The weight of contents shall not exceed 65 pounds.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with the appendix thereto.

5.2.3 Level C.- Sign boxes and vehicle mounts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The sign box is intended for use at night as a means of road marking, identifying troop locations, and indicating instructions. When used with the vehicle mount, the sign box may be used for vehicular identification.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article.- When preproduction sample is not required (see 3.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 The Government furnished batteries shall be equal to type BA-30 of MIL-B-18/9.

6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue have been made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activities:

Air Force - 84, 85

User Activities:

Army - AT
Navy - MC

Preparing activity:

Army - GL

Project No. 9905-0121

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

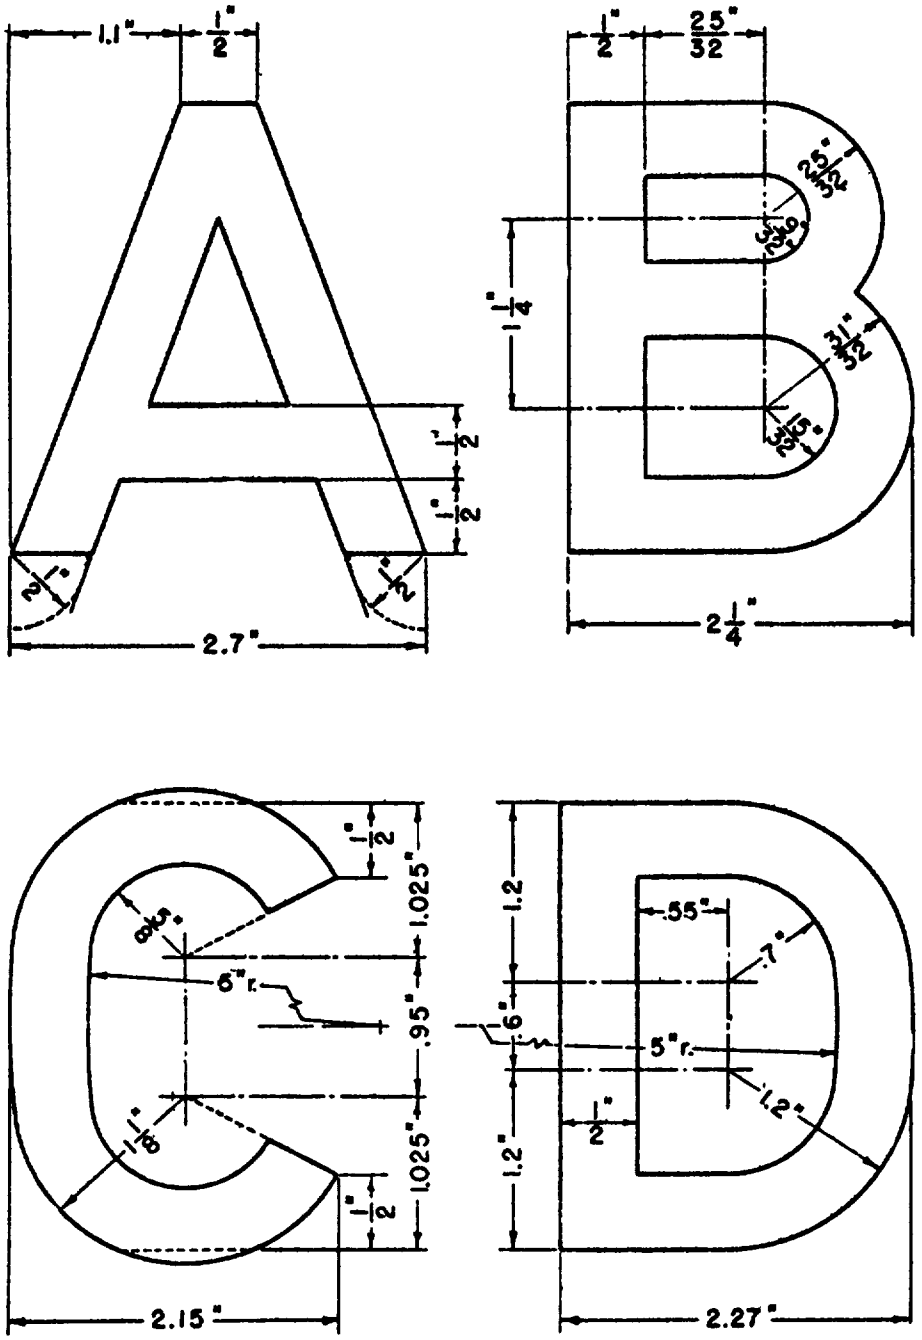


FIGURE 1.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

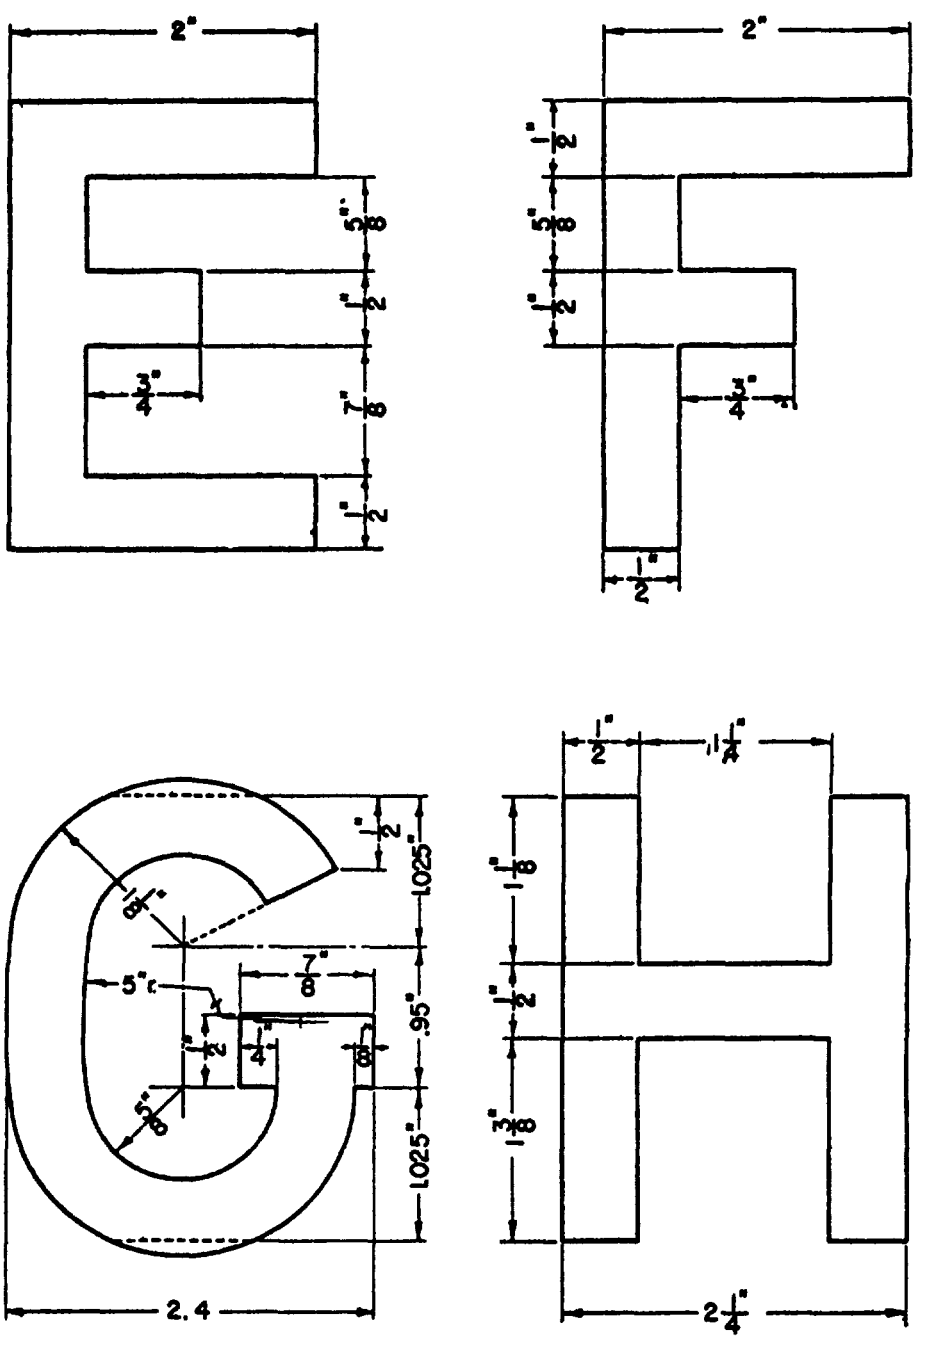


FIGURE 2.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

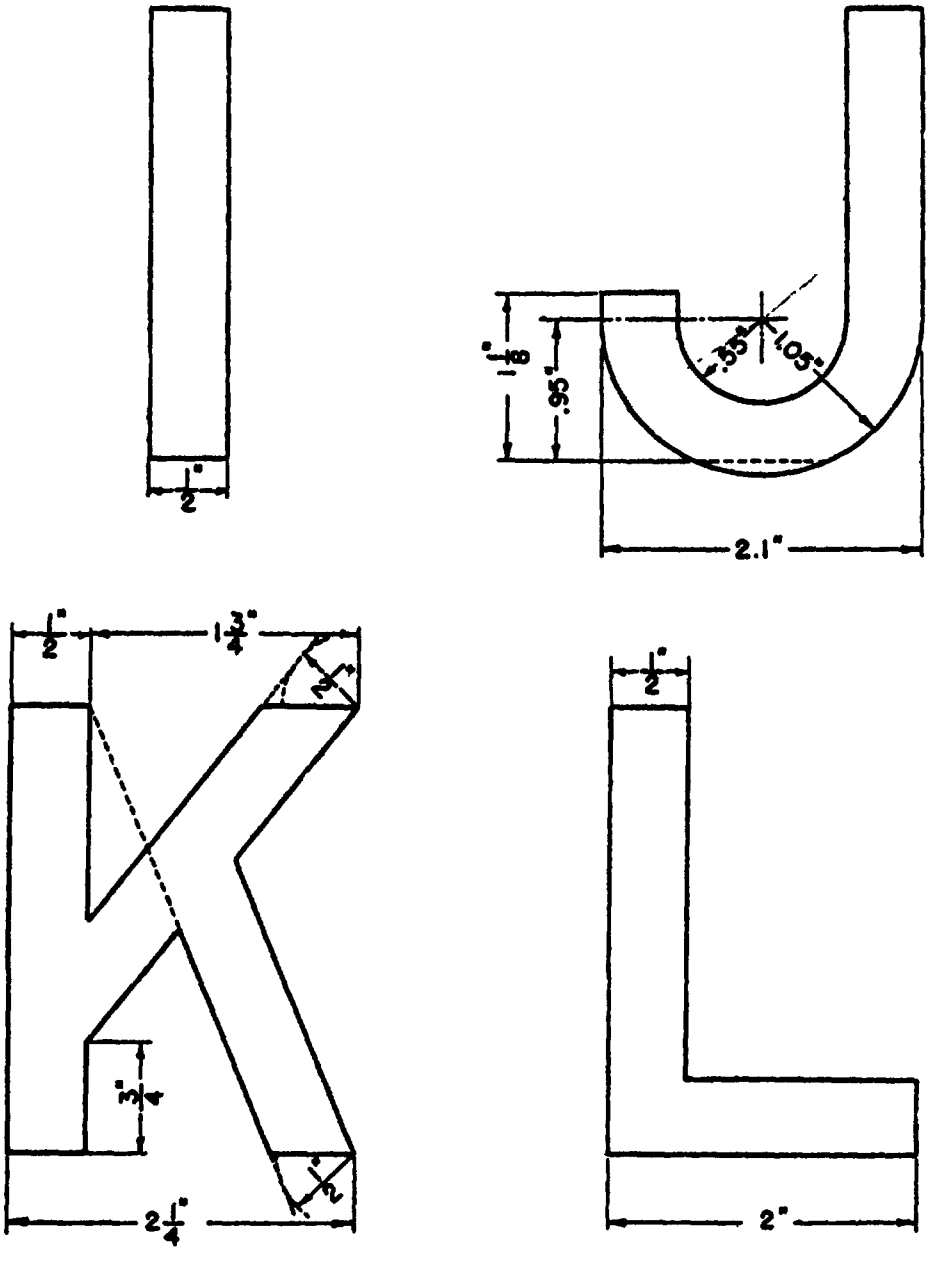


FIGURE 2.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

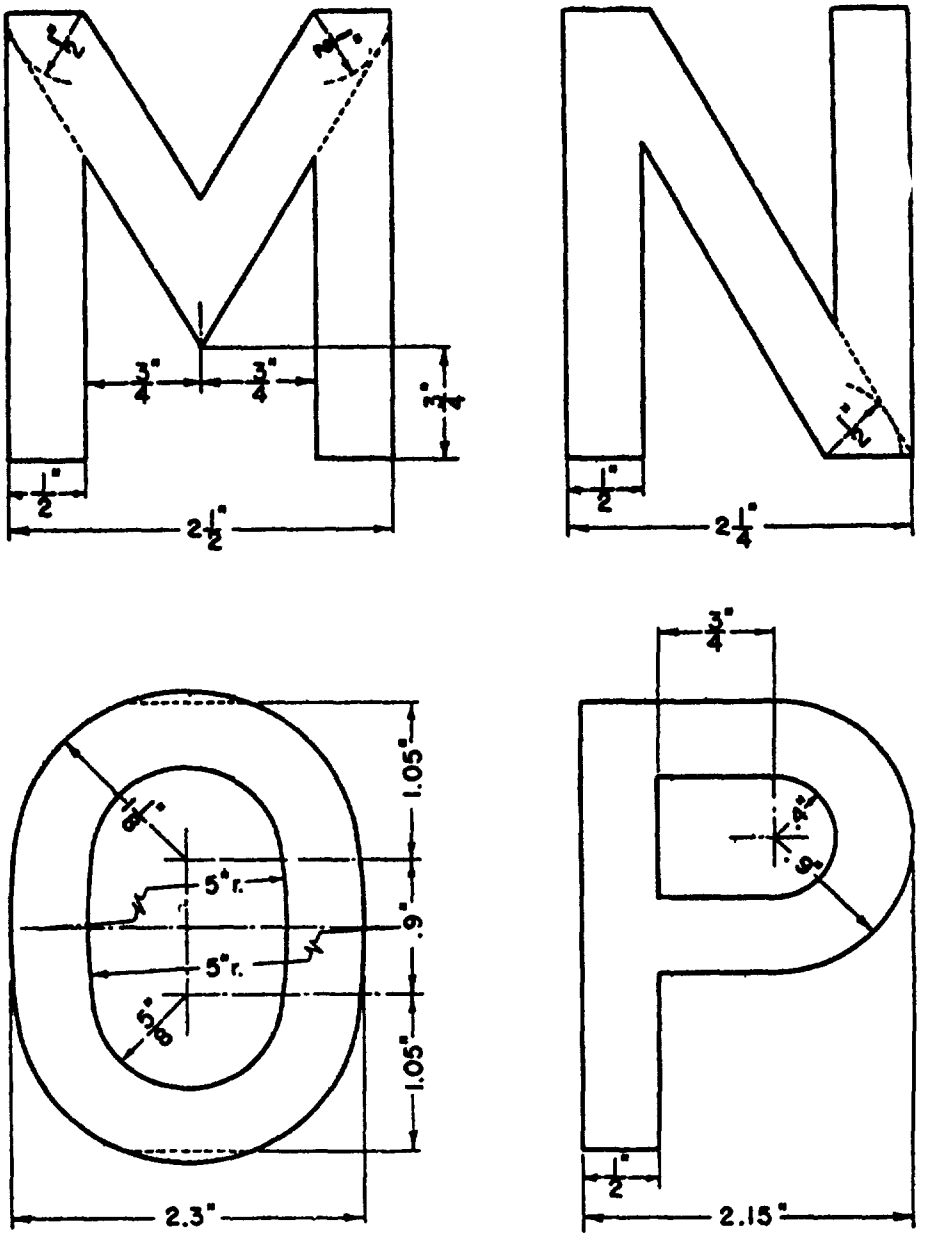


FIGURE 4.—Three-inch letters and numeral series.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

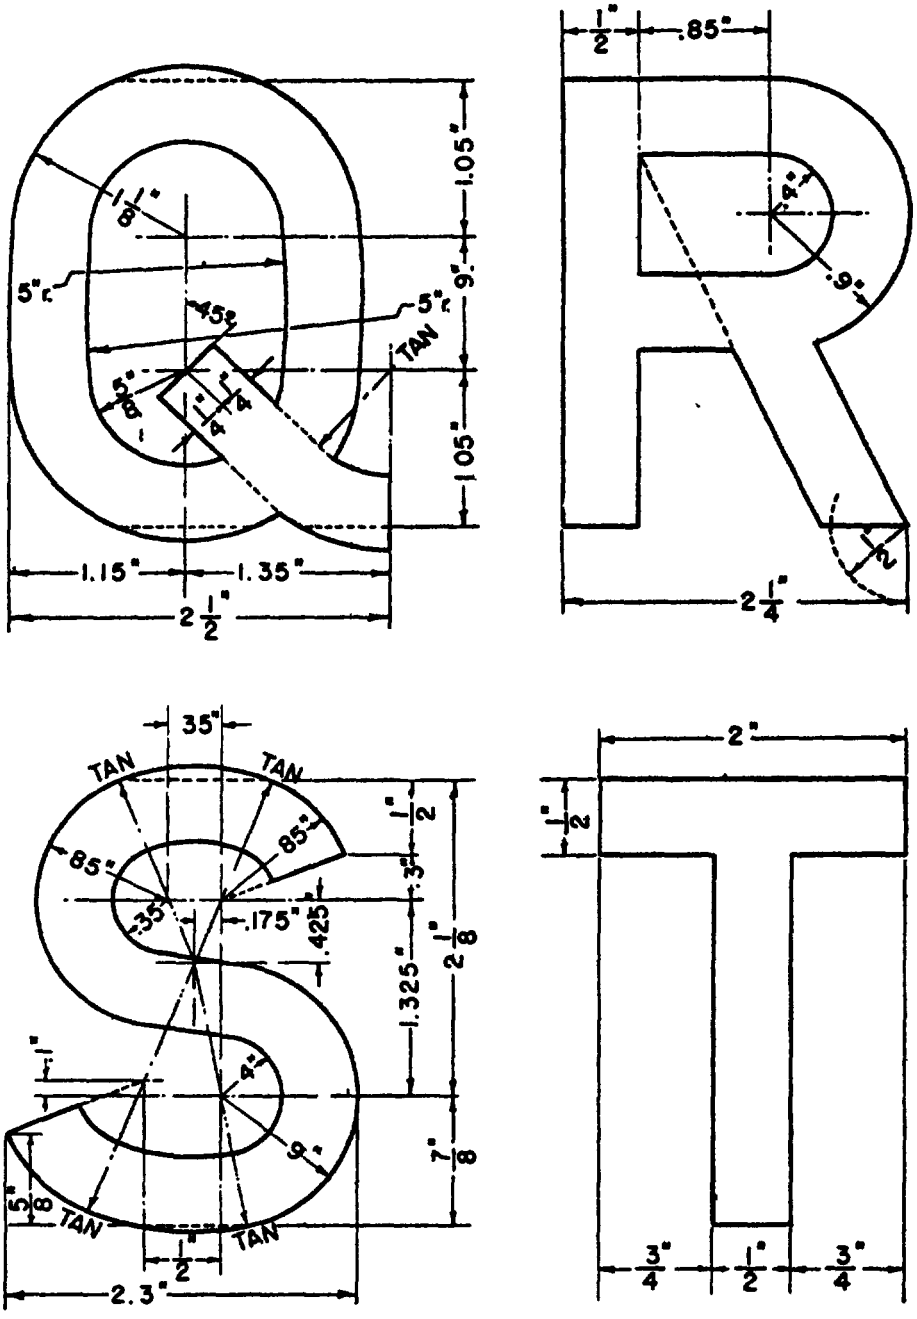


FIGURE 5.—Three-inch letters and numeral series.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

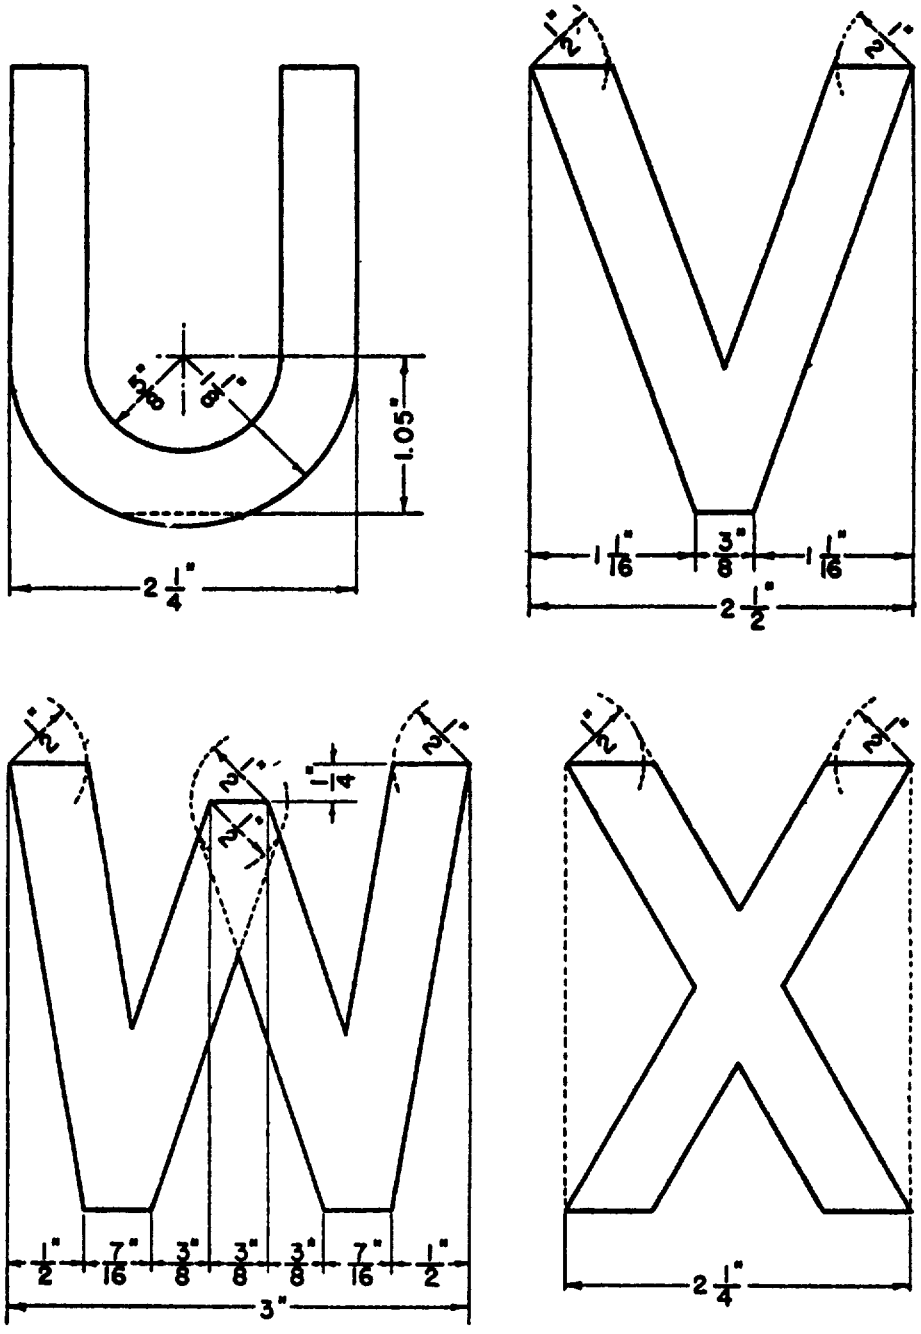


FIGURE 6.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

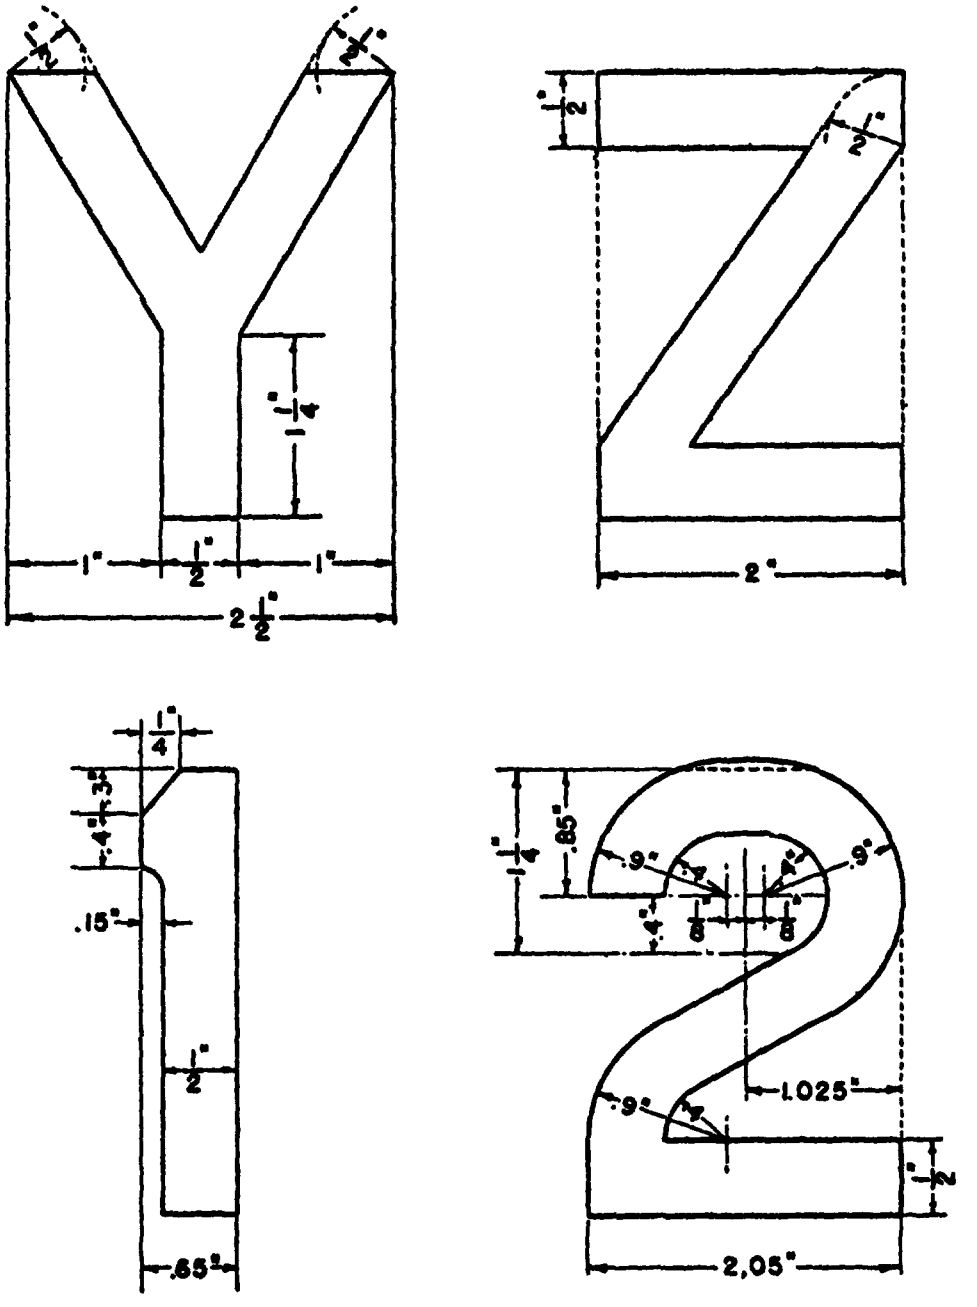


FIGURE 7.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

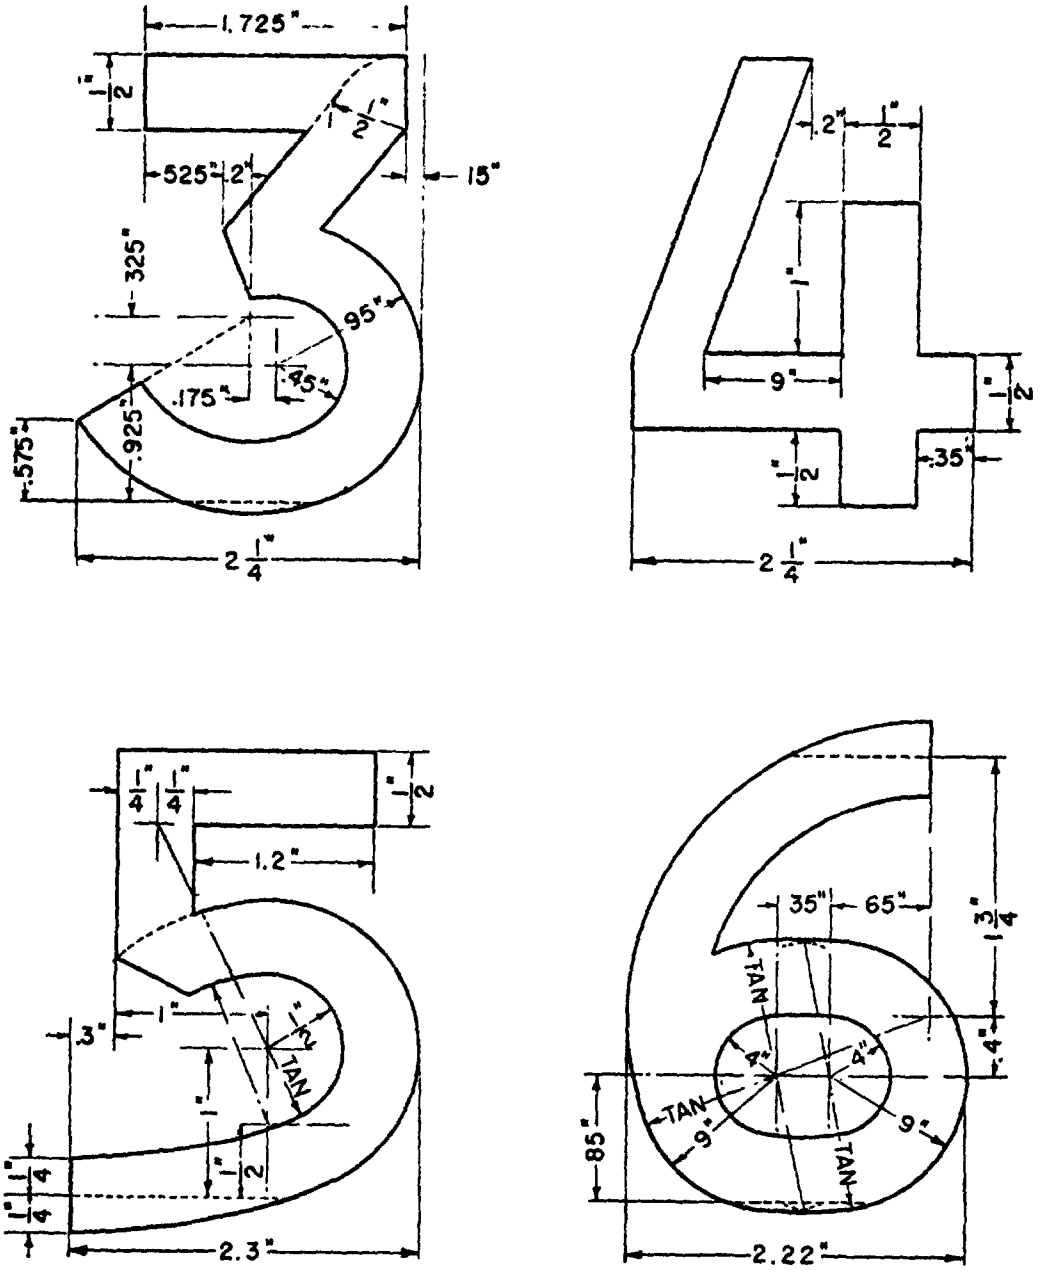


FIGURE 8.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

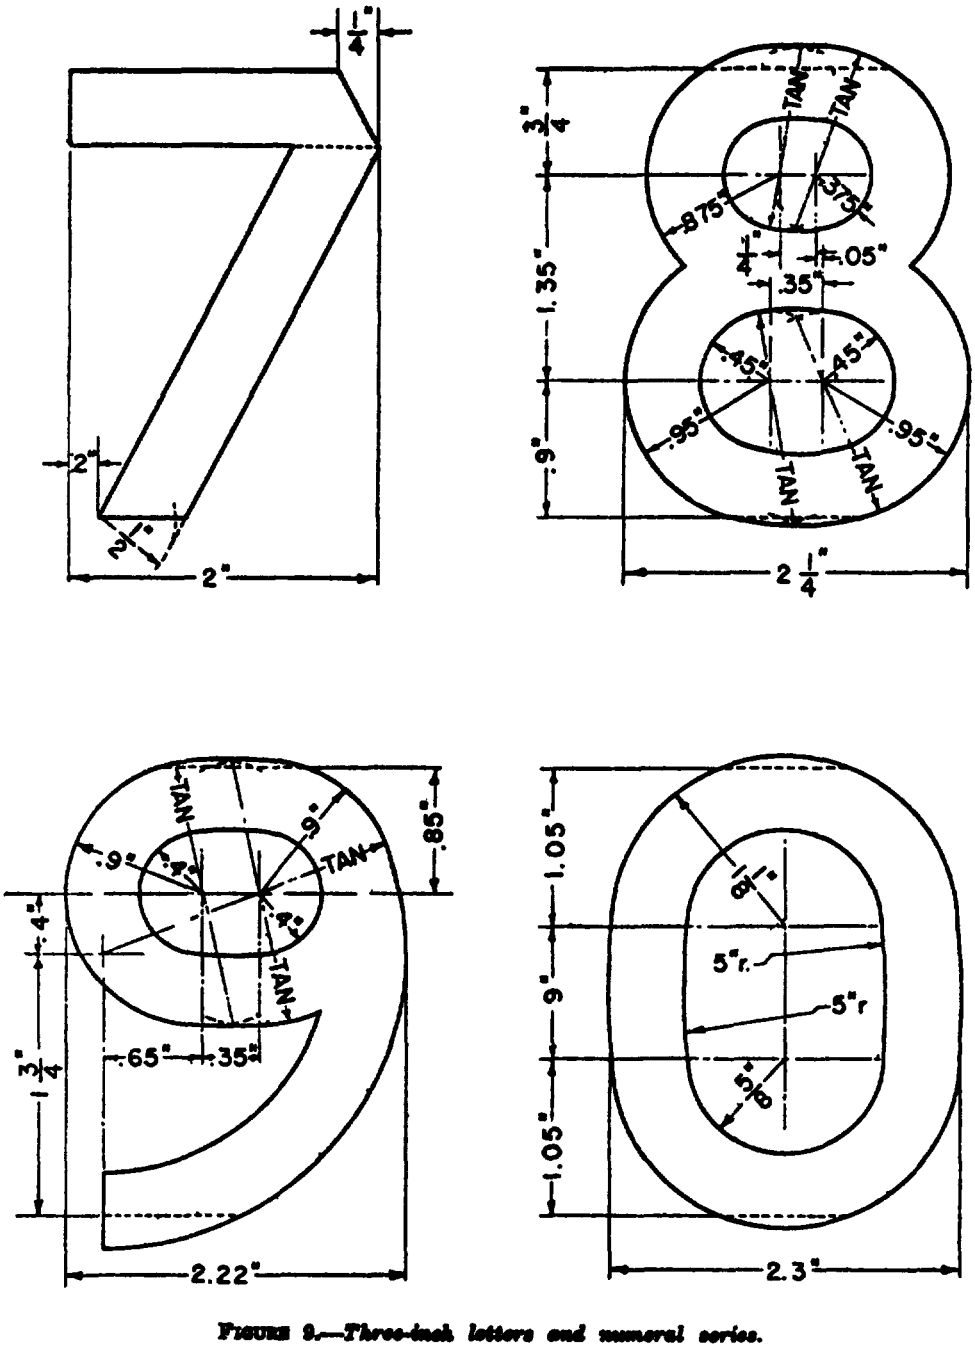


FIGURE 9.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

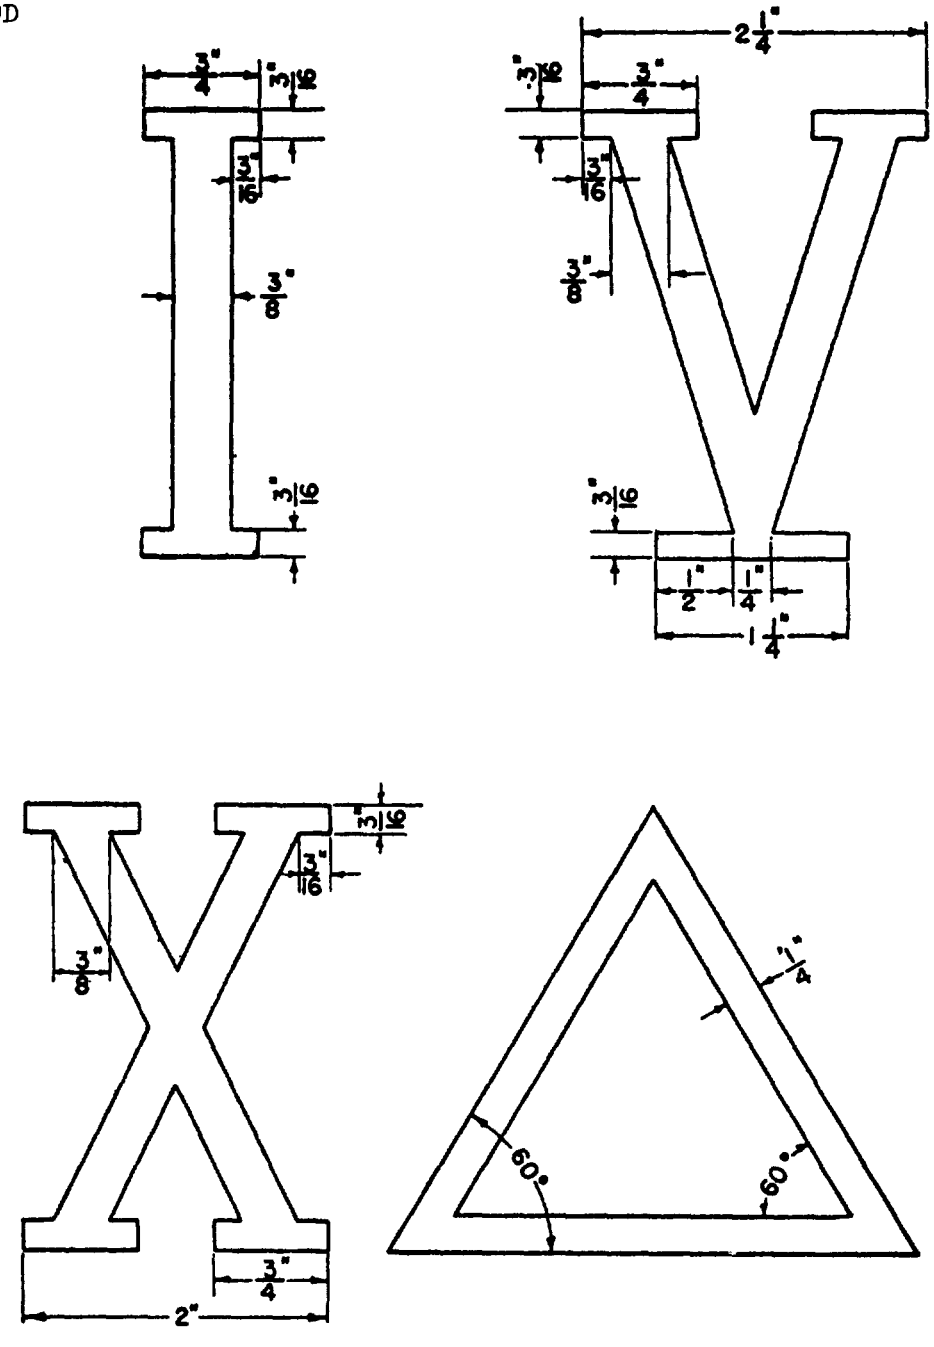


FIGURE 10.—*Three-inch letters and numeral series.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

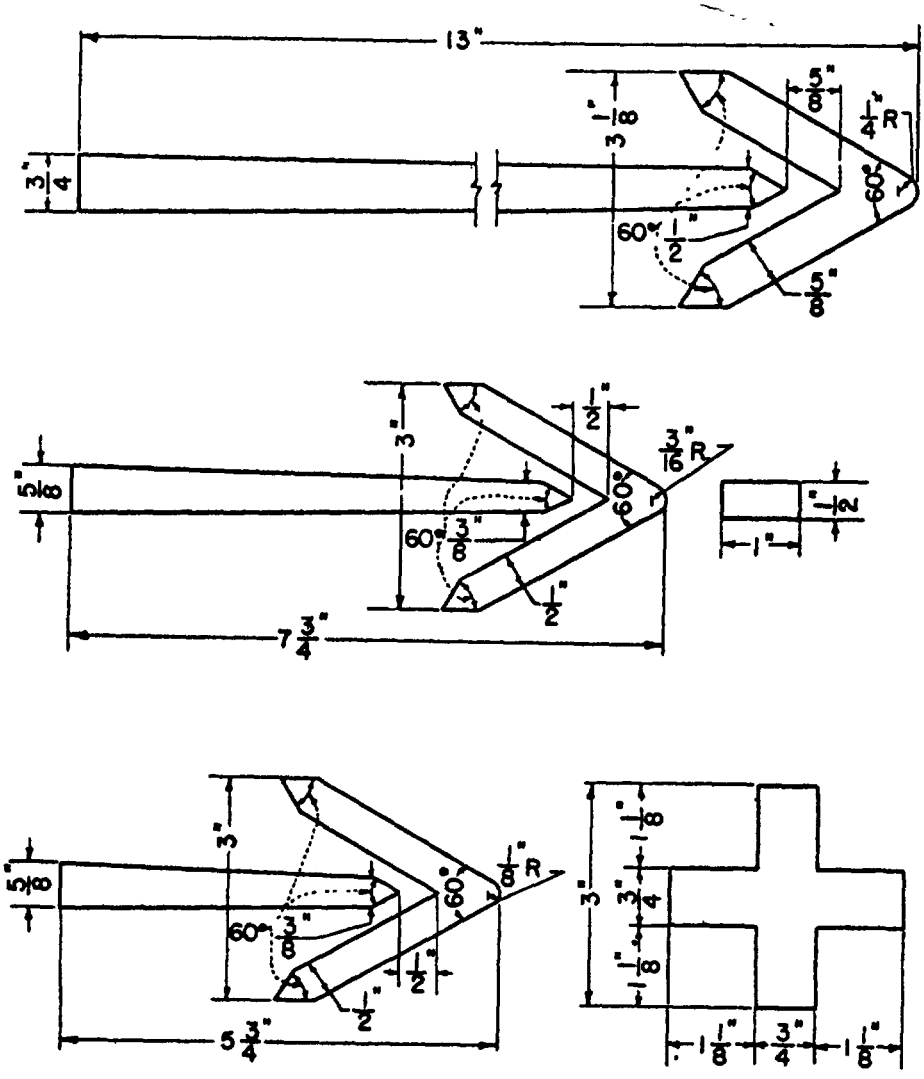


FIGURE 11.—*Directional arrows, first aid symbol, and spacing bar.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

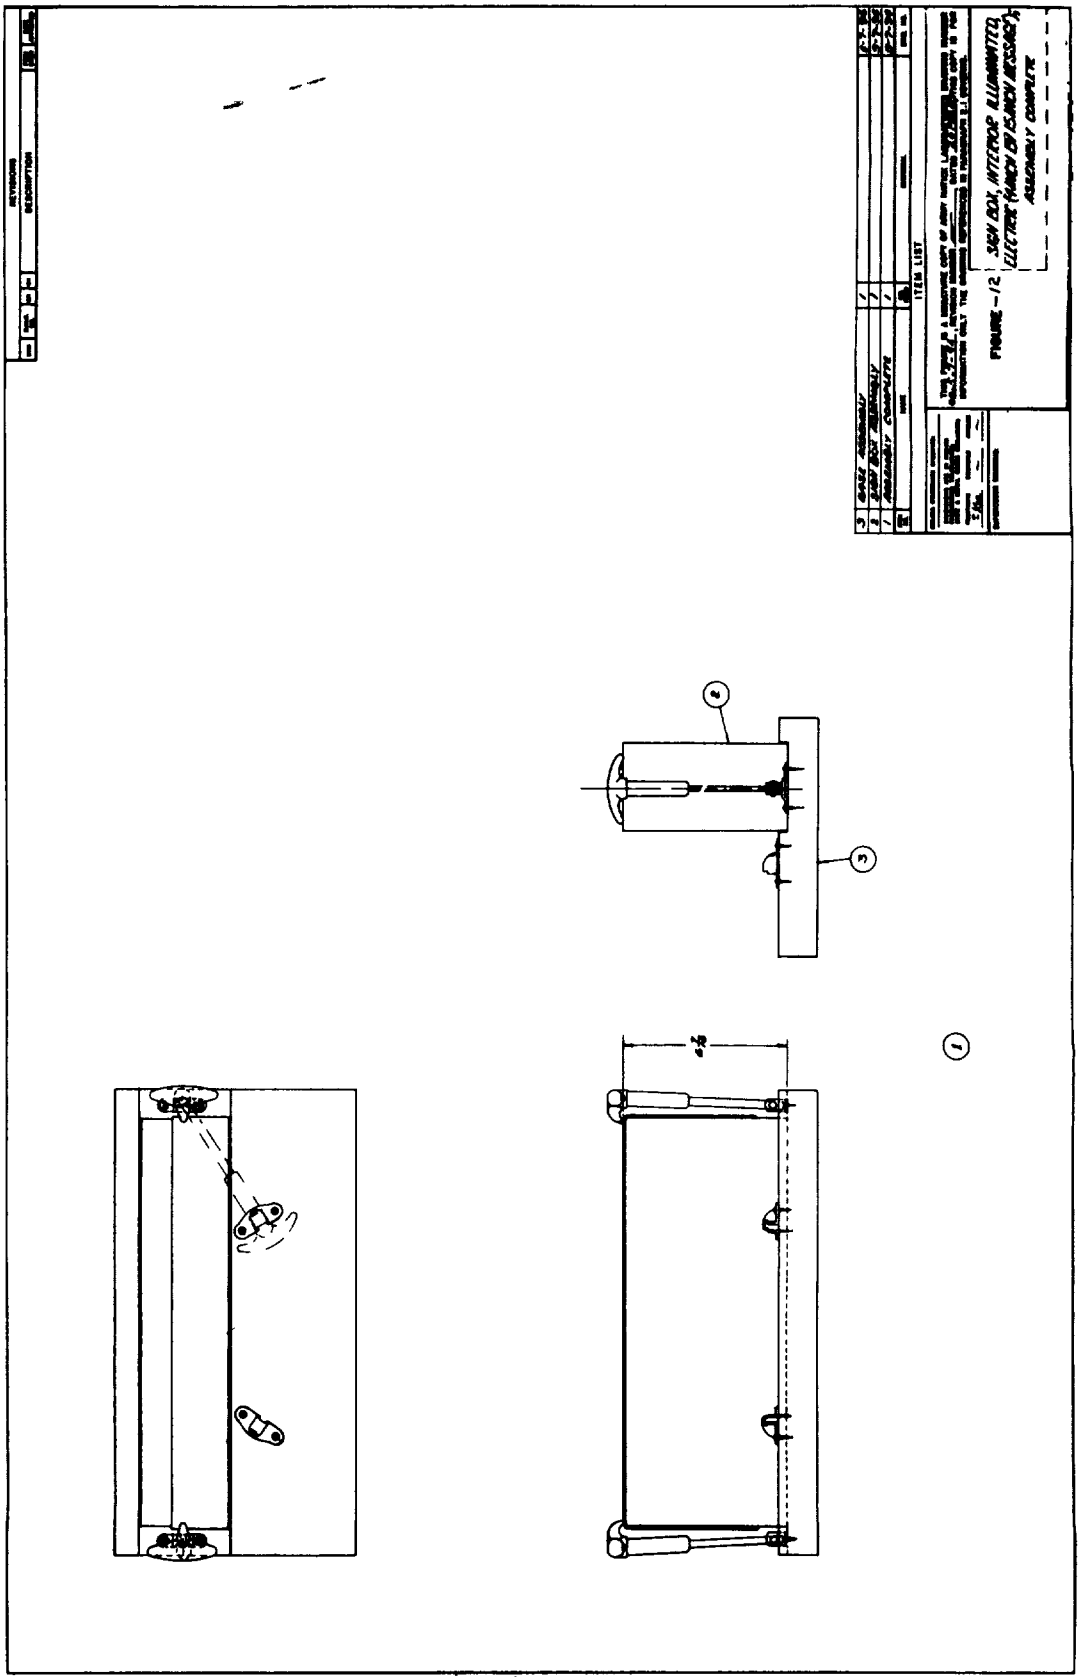


FIGURE - 12 SIGN BOX, INTERIOR ILLUMINATED, ELECTRIC (HANDICAPPED SIGN) MESSAGE, ASSEMBLY COMPLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.



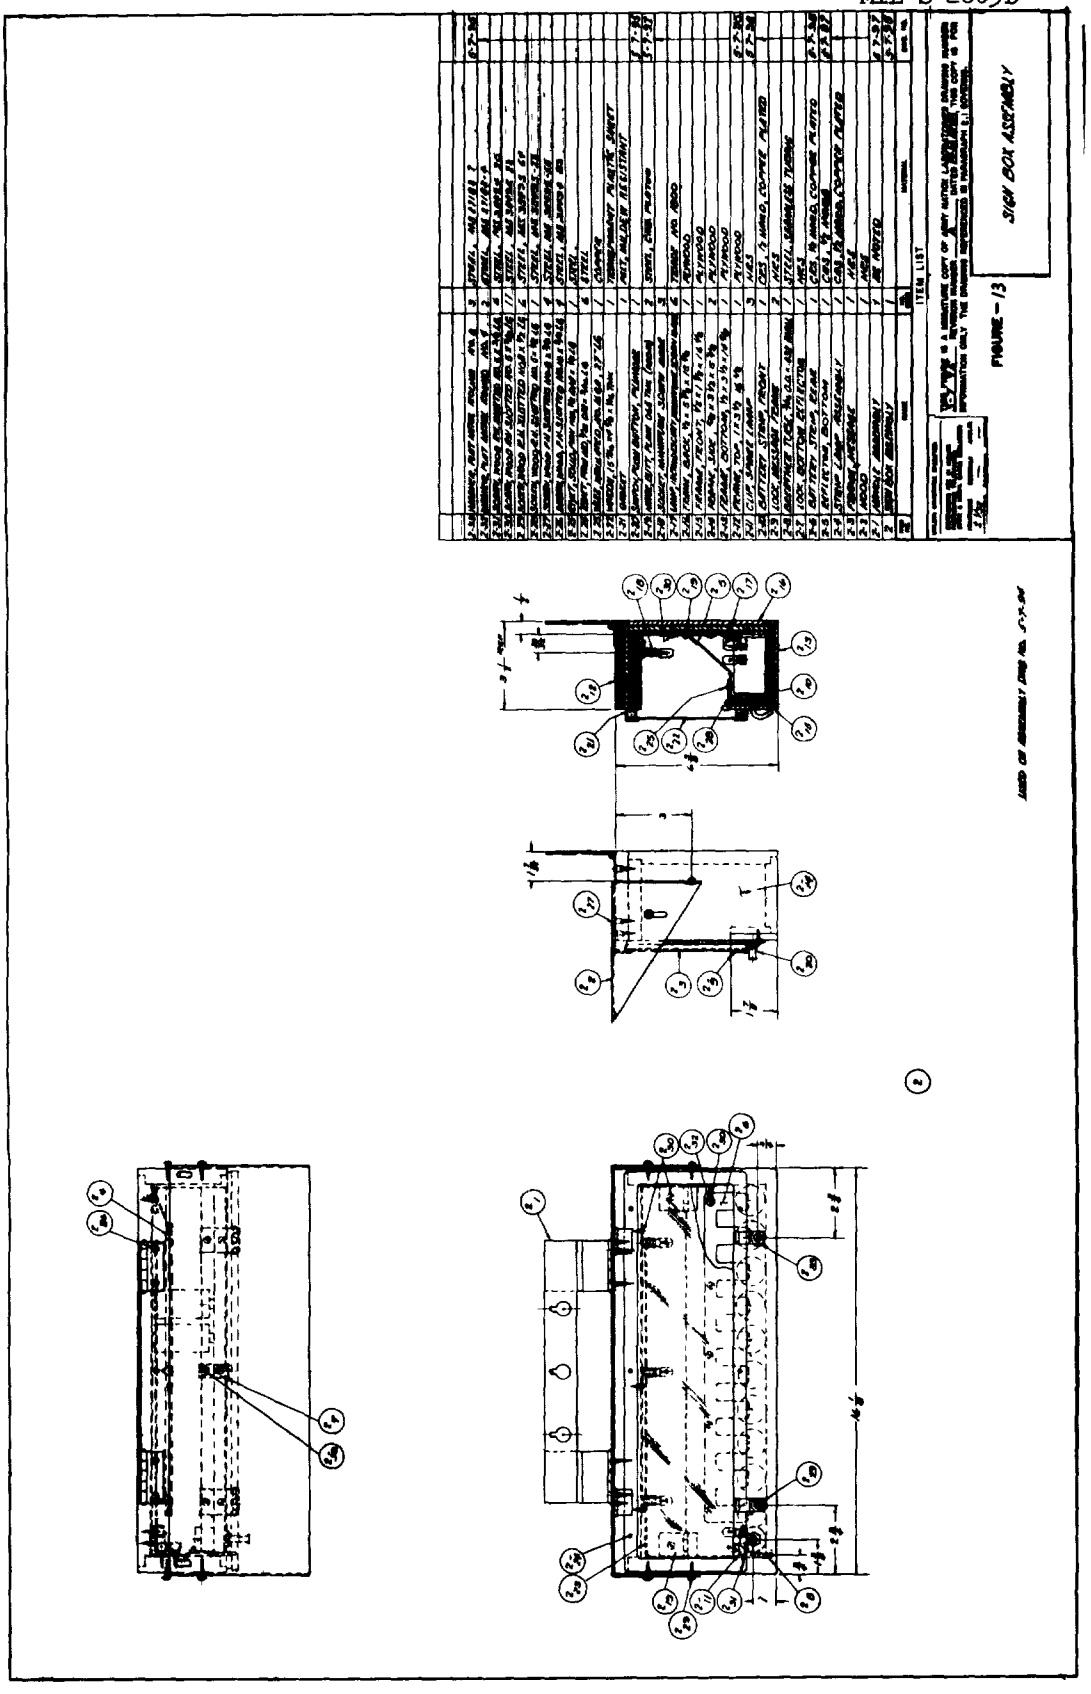


FIGURE – 13 SIGN BOX ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

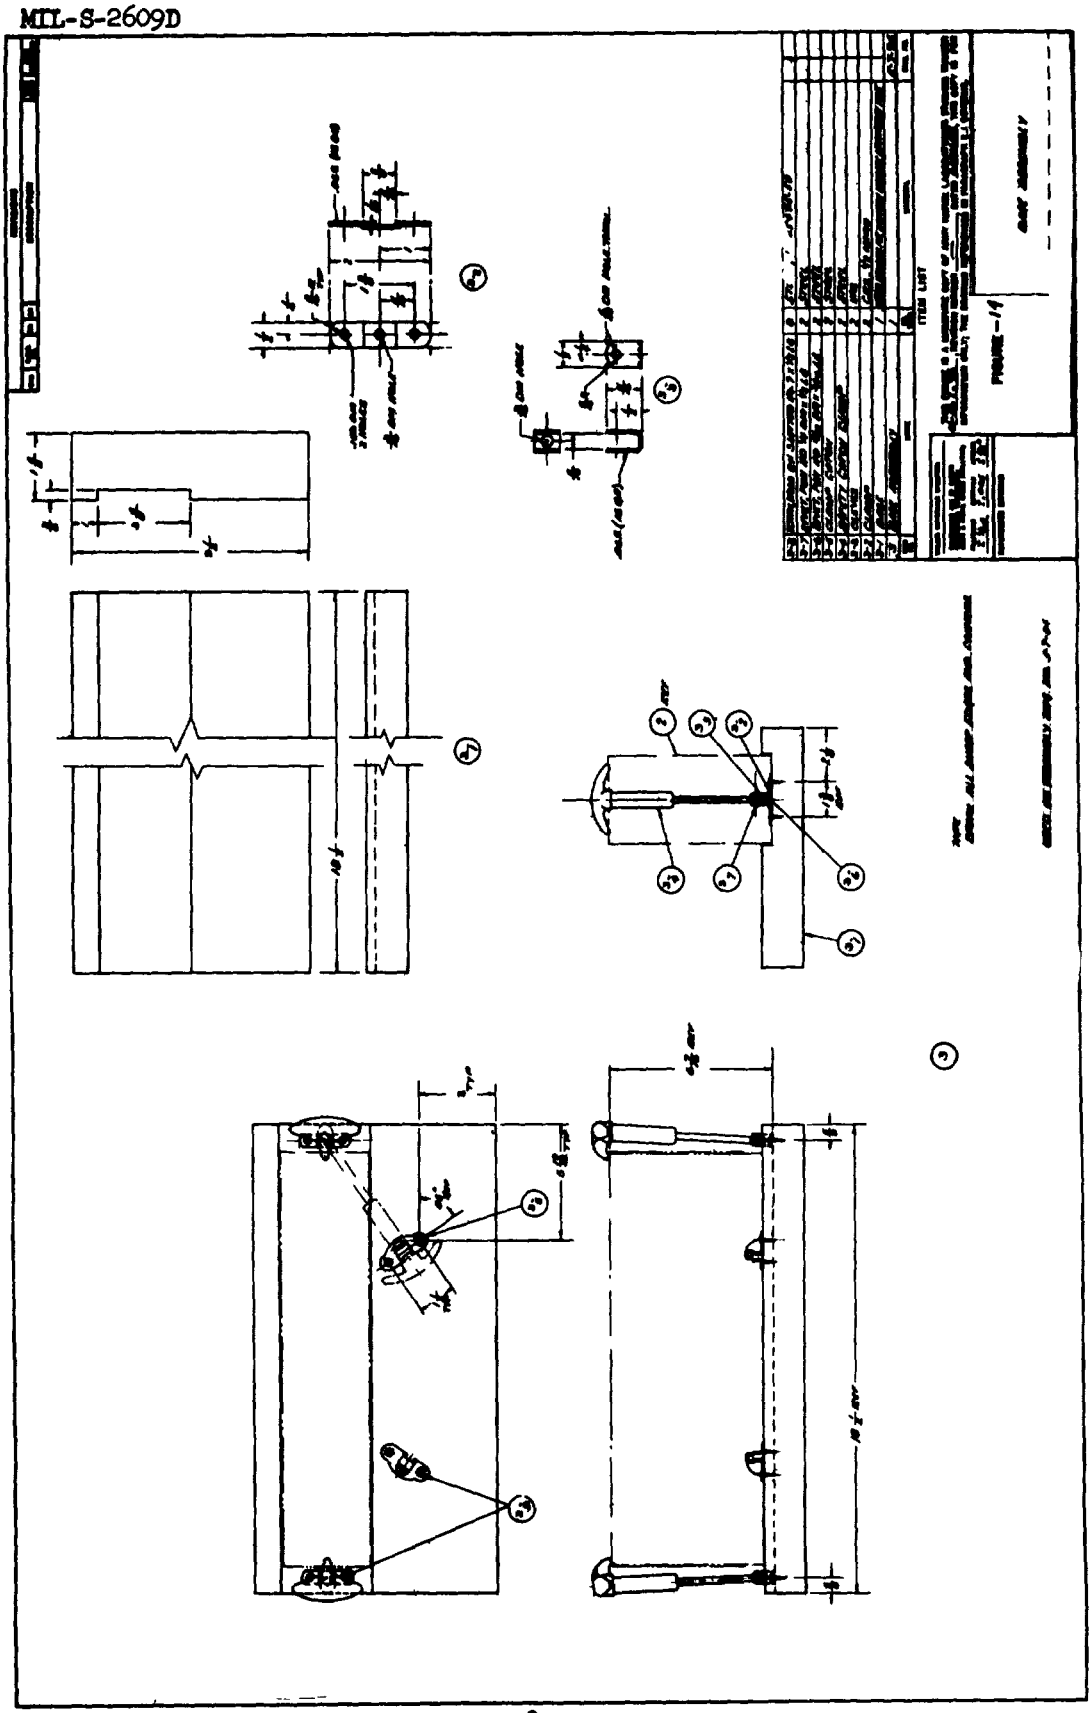

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

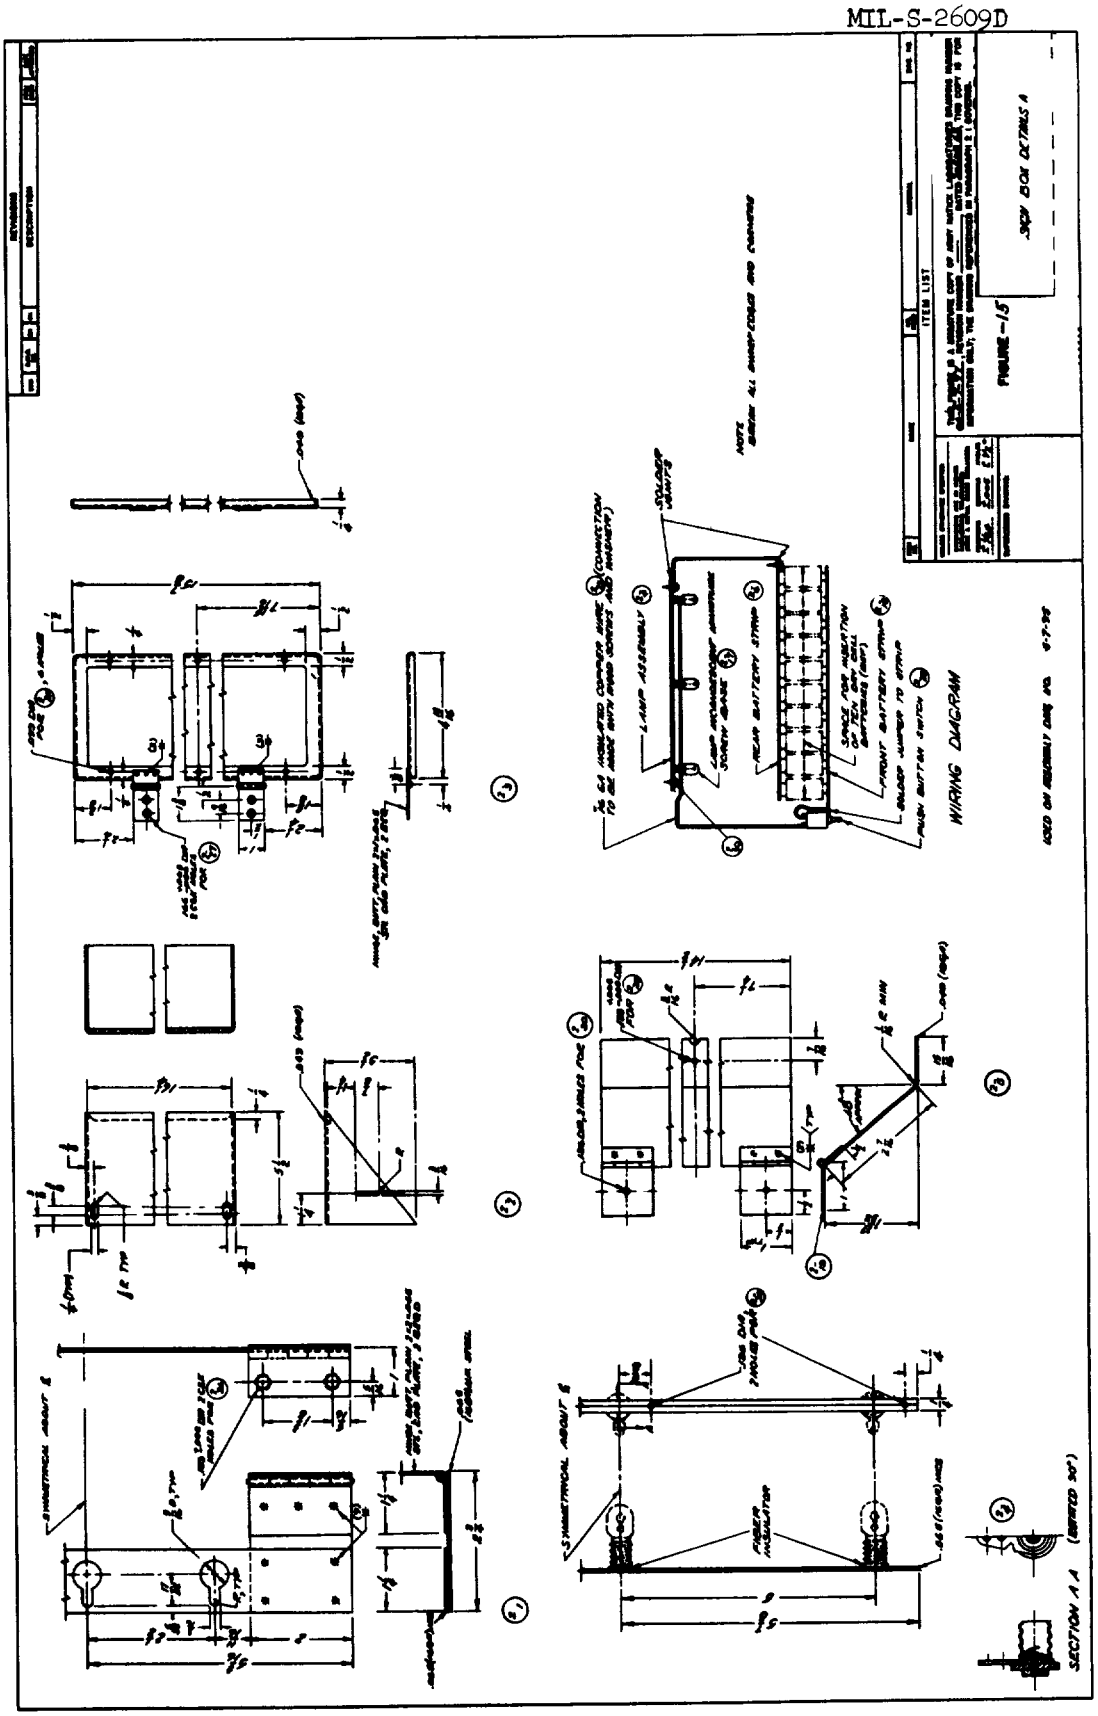

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

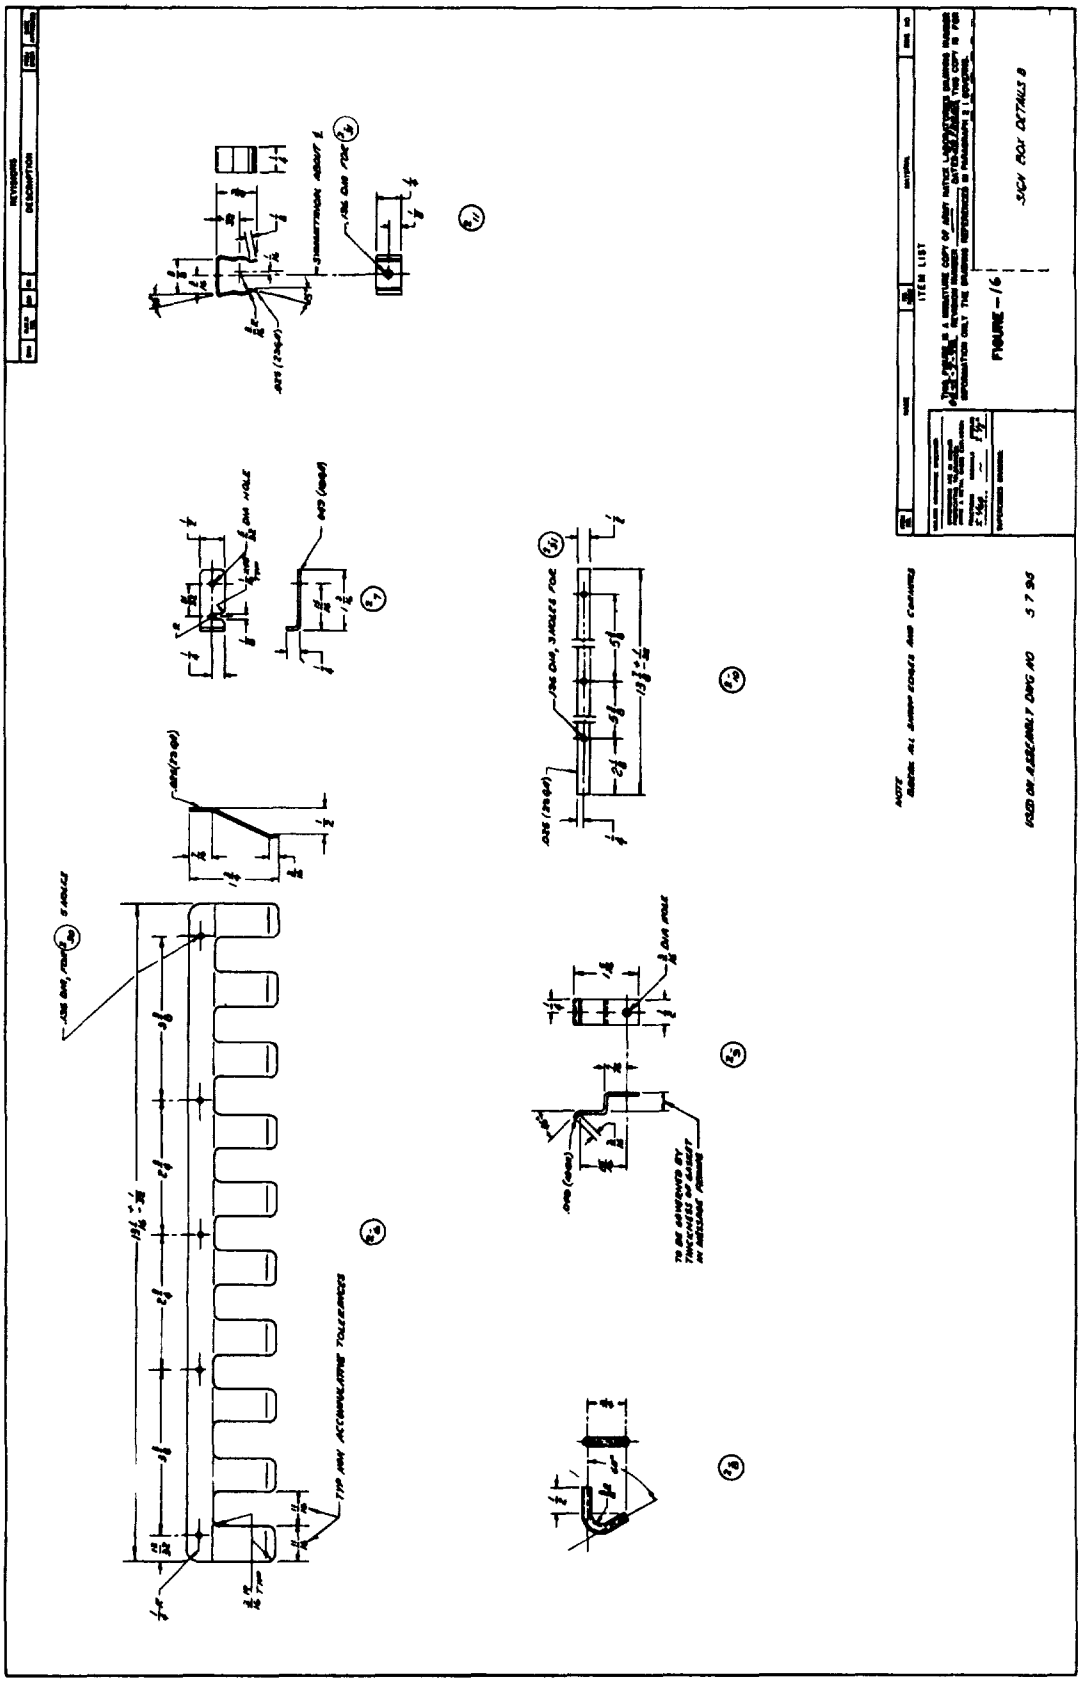

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

MIL-S-2609D, SIGN BOX, INTERIOR ILLUMINATED, ELECTRIC (4 INCH BY 15 INCH MESSAGE)

ORGANIZATION	CITY AND STATE

CONTRACT NO	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

343-221 (A-573)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:10Z
Check the source to verify that this is the current version before use.