
MILITARY SPECIFICATION SHEET


METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED DECIBEL (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 36

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304

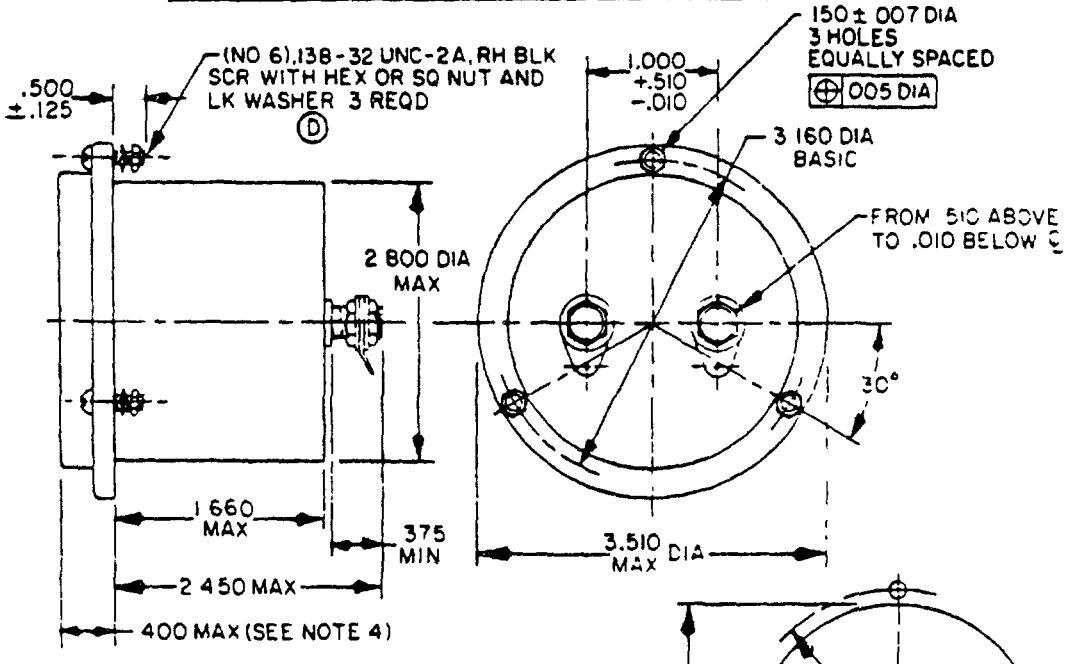

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.375	9.53	2 450	62.23
.007	.18	.400	10.16	2.800	71 12
.010	.25	.500	12.70	2.820	71.63
.125	3.18	.510	12.95	3.160	80 26
.138	3.51	1.000	25.40	3.510	89 15
.150	3.81	1.660	42.16		

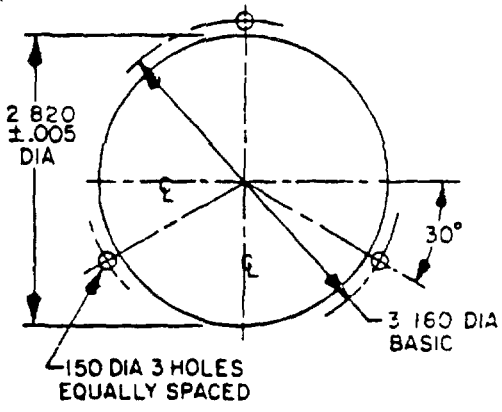

PANEL DRILLING PLAN

NOTES
1. Dimensions are in inches
2. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
3. Tolerance is ±1/2° on angles.
4. Maximum projection from front of panel including mounting gaskets (if used).

Ⓓ denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Full scale range: -10 to +6 dB.

Scale
Length: 2 inches minimum
Pointer deflection: 90° minimum.

Reference level. 1 milliwatt in 600 ohms.

Voltage: 0.775 V at 0 dB scale position.

Actual level: 0 at 0 dB.

Position influence: ±2 percent change for 60° rotation from normal operating position

Accuracy.

Scale position	Max error
-10 dB	2 0 dB
0 dB	0 5 dB
+6 dB	1 0 dB

(D) Overshoot: 25 percent maximum.

Response time: 1 second maximum at 1,000 Hz at 0 dB scale position when deflected momentarily to 0 dB

Effective resistance. 5,000 ohms ±10 percent at 0 dB scale position.

Frequency range. 25 to 10,000 Hz.

Scale position	Change in indication
-10 dB	±0.5 dB
0 dB	±0.5 dB
+6 dB	±0 5 dB

High temperature cycling

Scale position	Temporary change in indication	Permanent change in indication
-10 dB	±4.0 dB	±1.5 dB
0 dB	±0 8 dB	±1 5 dB
+6 dB	±0.6 dB	±1.5 dB

Temperature influence:

Scale position	Change in indication
-10 dB	±1.0 dB
0 dB	±0.4 dB
+6 dB	±0.2 dB

Exposure to extreme temperatures:

Scale position	Permanent change in indication
-10 dB	±1.0 dB
0 dB	±1.0 dB
+6 dB	±1.0 dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

Overload capacity
Sustained overload:

Scale position	Permanent change in indication
-10 dB	±2.0 dB
0 dB	±1.0 dB
+6 dB	±2.0 dB

Dielectric withstanding voltage 3,000 volts rms.

Vibration, random drop, and shock:

Scale position	Permissible change in indication
-10 dB	±2.4 dB
0 dB	±1.8 dB
+6 dB	±2.0 dB

Custodians.
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity:
Army - EL

Agent
DSA - ES

(Project 6625-0574-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN ~~AMSEL-~~ DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

To detach this fo cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-M-10304/10D METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: DECIBEL (FLUSH MOUNTING, ROUND FLANGE, 3½ INCH) STYLE 36

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.