INCH-POUND
MIL-PRF-10304/10E
18 January 2008
SUPERSEDING
MIL-M-10304/10D
17 December 1975

PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: DECIBEL (FLUSH MOUNTING, ROUND FLANGE, 3.5 INCH), STYLE 36

Inactive for new design after November 4, 1997

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-10304.

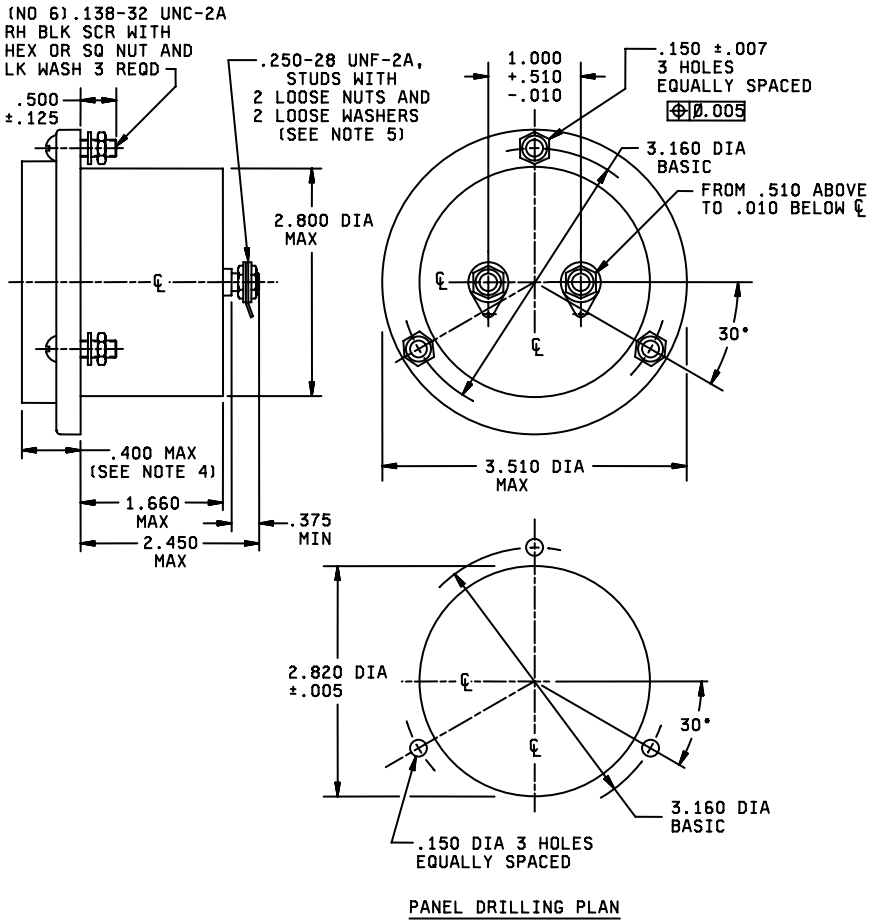


FIGURE 1. Meter, panel type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	.13	.250	6.35	1.660	42.16
.007	.18	.375	9.53	2.450	62.23
.010	.25	.400	10.16	2.800	71.12
.125	3.18	.500	12.70	2.820	71.63
.138	3.51	.510	12.95	3.160	80.26
.150	3.81	1.000	25.40	3.510	89.15

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerances are ± .015 inch for two place (.XX), and ± .005 inch for three place (.XXX) dimensions.
2. Tolerance is ± 0.5 (½) degree on angles.
3. Metric equivalents are given for general information only.
4. Maximum projection from front panel including mounting gaskets (if used).
5. Other forms of terminals, as specified in MIL-PRF-10304, are permitted. The specified minimum length applies to stud-type terminals only. Terminals shall be equally spaced, from each side of vertical centerline.

FIGURE 1. Meter, panel type - Continued.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value.)

Dimensions and configuration: See figure 1.

Full-scale ranges: - 10 to + 6 dB.

Scale:
Length: 2 inches minimum.
Pointer deflection: 90 degrees minimum.

Reference level: 1 milliwatt in 600 ohms.

Voltage: 0.775 V at 0 dB scale position.

Actual level: 0 at 0 dB

Position influence: ± 2 percent change of 60 degrees rotation from normal operating position.

Accuracy:

Scale position	Maximum error
- 10 dB	2.0 dB
0 dB	0.5 dB
+ 6 dB	1.0 dB

Overshoot: 25 percent maximum.

Response time: 1 second maximum at 1,000 Hz at 0 dB scale position, when deflected momentarily to 0 dB.

Effective resistance: 5,000 ohms ± 10 percent at 0 dB scale position.

Frequency range: 25 to 10,000 Hz

Scale position	Change in indication
- 10 dB	± 0.5 dB
0 dB	± 0.5 dB
+ 6 dB	± 0.5 dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

High temperature cycling:

Scale position	Temporary change in indication	Permanent change in indication
- 10 dB	± 4.0 dB	± 1.5 dB
0 dB	± 0.8 dB	± 1.5 dB
+ 6 dB	± 0.6 dB	± 1.5 dB

Temperature influence:

Scale position	Change in indication
- 10 dB	± 1.0 dB
0 dB	± 0.4 dB
+ 6 dB	± 0.2 dB

Exposure to extreme temperatures:

Scale position	Permanent change in indication
- 10 dB	± 1.0 dB
0 dB	± 1.0 dB
+ 6 dB	± 1.0 dB

Overload capacity (sustained overload):

Scale position	Permanent change in indication
- 10 dB	± 2.0 dB
0 dB	± 1.0 dB
+ 6 dB	± 2.0 dB

Dielectric withstanding voltage: 3,000 volts rms.

Vibration, random drop, and shock:

Scale position	Permissible change in indication
- 10 dB	± 2.0 dB
0 dB	± 1.8 dB
+ 6 dB	± 2.0 dB

The Qualified Products List (QPL) associated with this inactive for new design specification sheet will be maintained until acquisition of the product is no longer required, whereupon the specification sheet and QPL will be canceled.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. This document references MIL-PRF-10304.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 6625-0938-000)

Review activities:
Army – AR, AT, AV, CR4, MI
Navy – CG, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.