
MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED AMMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 36

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304

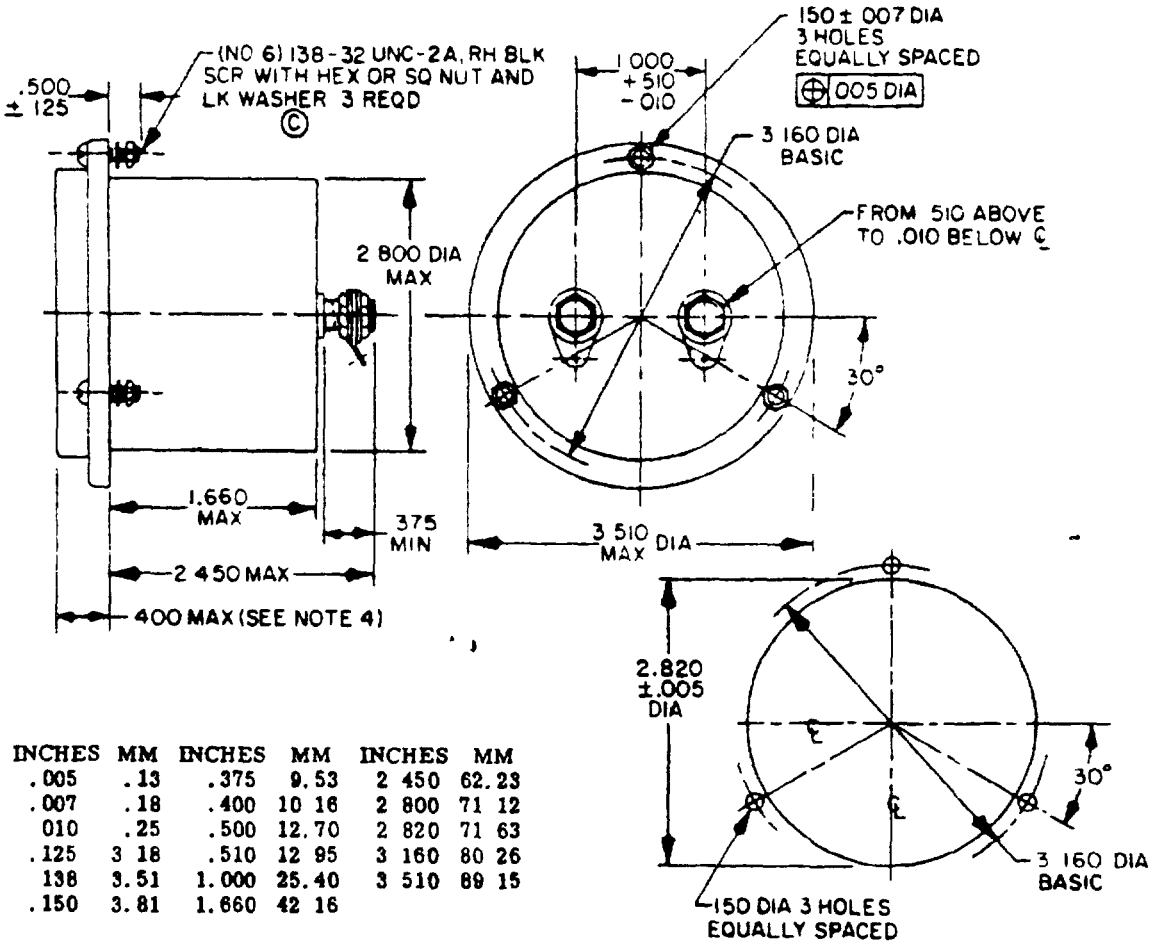

PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.375	9.53	2.450	62.23
.007	.18	.400	10.16	2.800	71.12
.010	.25	.500	12.70	2.820	71.63
.125	3.18	.510	12.95	3.160	80.26
.138	3.51	1.000	25.40	3.510	89.15
.150	3.81	1.660	42.16		

NOTES

1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerance is ±1/2° for angles.
4. Maximum projection from the front of panel including gaskets (if used)
5. For self-contained meters of 30 amperes (amp) and above, this dimension is 2 (50.80 mm) max
6. For self-contained meters of 30 amperes (amp) and above, this dimension is 2.625 (66.68 mm) max

FSC 6625

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS
(Readings expressed as a percent of full-scale value)

Dimensions and configuration See figure

Full-scale ranges See table I

Scale
Length 2 inches minimum
Pointer deflection 90° minimum.

Position influence ±2 percent change for 60° rotation from normal operating position

Accuracy ±2 percent

Overshoot 67 percent maximum

Response time 2 5 seconds maximum

Power consumption (loss) (at end scale deflection):
Self-contained 60-Hz ammeters at 60 Hz 1 VA maximum
Self-contained 400-Hz ammeters at 400 Hz 2 VA maximum
Self-contained 800-Hz ammeters at 800 Hz 3 5 VA maximum

Frequency range (±2 percent change)

Nominal frequency	Extreme range
60-Hz ammeters (AC)	25-125 Hz
400-Hz ammeters (AF)	360-440 Hz
800-Hz ammeters (AE)	720-880 Hz

High temperature cycling
±2 percent
±2 percent permanent change

Temperature influence ±0 5 percent change

Exposure to extreme temperatures
±3 percent permanent change

Overload capacity
Momentary overload ±2 percent permanent change
Sustained overload:
±1 percent temporary zero shift
±1 percent permanent zero shift
±2 percent permanent change

Dielectric withstanding voltage 3,000 volts rms.

TABLE I Full-scale ranges.

Milliamperes (AC, AE, AF)		Amperes (AC, AE, AF)		
10	100	1	10	1/ 100
20	200	2	20	1/ 200
30	300	5	30	1/ 300
50	500		50	1/ 500

1/ Used with external transformer Current through meter at full-scale deflection shall be 5 amperes

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

Custodians.
Army - EL
Navy - EC
Air Force - 82

Review activities
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11
DSA - ES

User activities·
Army - MI
Navy - CG
Air Force - None

Preparing activity:
Army - EL

Agent.
DSA - ES

(Project 6625-0574-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-M-10304/14C METERS,ELECTRICAL INDICATING,PANEL TYPE, RUGGEDIZED:AMMETER,AC(FLUSH MOUNTING,ROUND FLANGE,3½ INCH)STYLE 36

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S Army Electronics Command
ATTN AMSELXX DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.