MIL-M-10304/16C
17 December 1975
SUPERSEDING
MIL-M-10304/15B
14 June 1965

MILITARY SPECIFICATION SHEET


METERS, ELECTRICAL INDICATING, AMMETERS, RF, PANEL TYPE, RUGGEDIZED

(FLUSH MOUNTING, ROUND FLANGE, 3-1/2-INCH)

STYLES 36 AND 38

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304

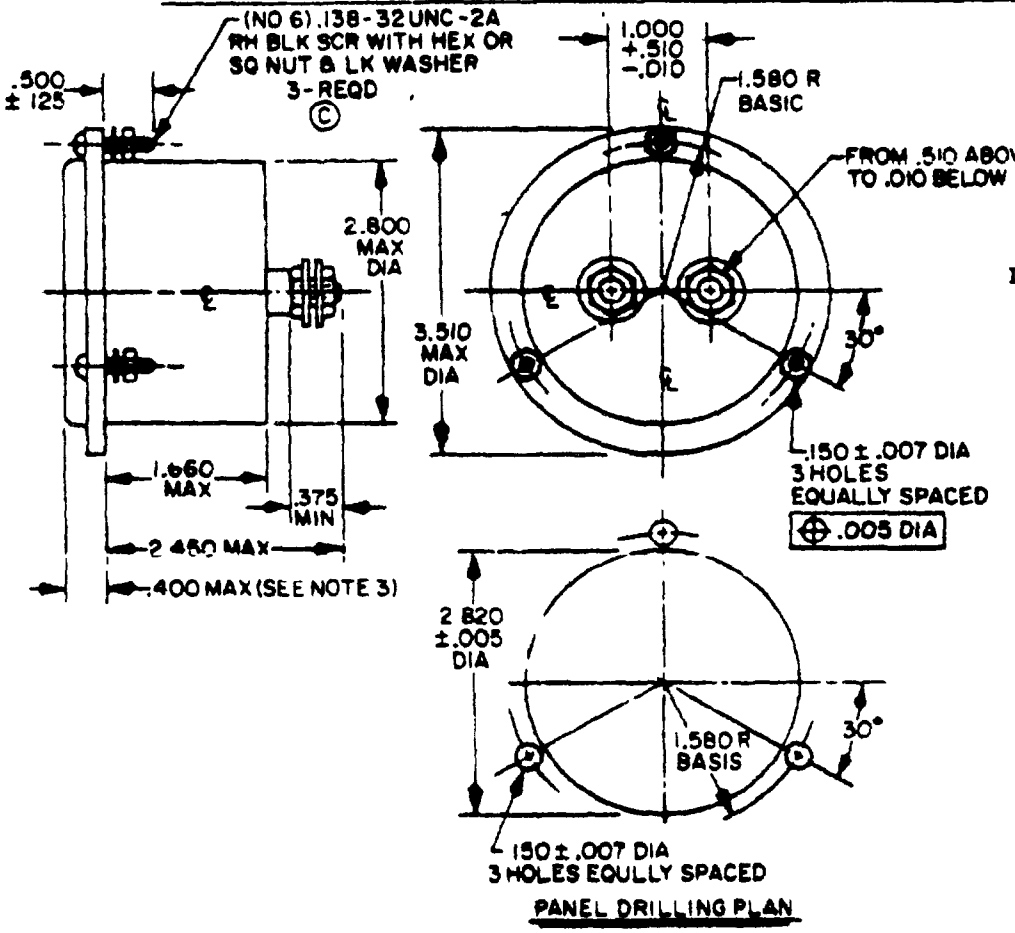

PANEL DRILLING PLAN

INCHES	MM
.005	.13
.007	.18
.010	.25
.125	3.18
.138	3.51
.150	3.81
.375	9.53
.400	10.16
.500	12.70
.510	12.95
1.000	25.40
1.580	40.13
1.660	42.16
2.450	62.23
2.800	71.12
2.820	71.63
3.510	89.15

NOTES

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Maximum projection from front of panel including gaskets (if used).
4. Tolerance is ±1/2° on angles.

© denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS
(Readings expressed as a percent of full-scale value)

Dimensions and configuration:
See above figure

Full-scale ranges See table I

Scale
Length 2 inches minimum
Pointer deflection 90° minimum

Color scheme W, B, F, or S.

Position influence: ±2 percent change for 60° rotation from normal operating position.

Table I. Full-scale ranges. 1/

Milliamperes (RF, RL)	Amperes (RF, RL)	
100 200 500	1 2 5	10 20

1/ Operating frequencies 25 hertz (Hz) to 30 MHz.
Tested at 60 Hz.

Accuracy ± 2 percent at 60 Hz

© Overshoot 40 percent maximum

Response time 2 5 seconds maximum.

Power consumption (loss): Voltage drop at 60 Hz across the heating element at full-scale deflection shall not exceed

Ranges	Volts
150 milliamperes and less	1 40
151 to 999 milliamperes, incl	0 8
1 to 9 9 amperes, incl	0 5
10 amperes and over	0 25

High temperature cycling
± 8 percent
± 3 percent permanent change

Exposure to extreme temperatures
± 16 percent change at -55°C
± 3 percent permanent change.

Overload capacity
Short-time overload:
± 2 percent permanent change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS. -Continued

Sustained overload
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage 3,000 volts rms

Custodians
Army - EL
Navy - EC
Air Force - 82

Review activities
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11

User activities
Army - MI
Navy - CG
Air Force - None

Preparing activity.
Army - EL

(Project 6625-0574-12)

GOVERNMENT PRINTING OFFICE 1976-703-036/334

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, submitting comments and suggestions for improvements All users of military standardiza suggestions This form may be detached, folded along the lines indicated, taped along the mailed In block 5, be as specific as possible about particular problem areas such as word too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording ch problems. Enter in block 6 any remarks not related to a specific paragraph of the docum acknowledgement will be mailed to you within 30 days to let you know that your comme considered.

NOTE This form may not be used to request copies of documents, nor to request waive specification requirements on current contracts Comments submitted on this form do no to waive any portion of the referenced document(s) or to amend contractual requirement

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MA
FIRST CLASS PERMIT NO 12062 WASHINGTO

POSTAGE WILL BE PAID BY THE DEPARTMENT OF TH

Commander
US Army Avionics Research and Devel
Attn DAVAA-S/PE
Fort Monmouth NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.