
MIL-M-10304/16B
27 April 1971
SUPERSEDING
MIL-M-10304/16A
14 June 1965


MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: SPECIAL (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 38

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

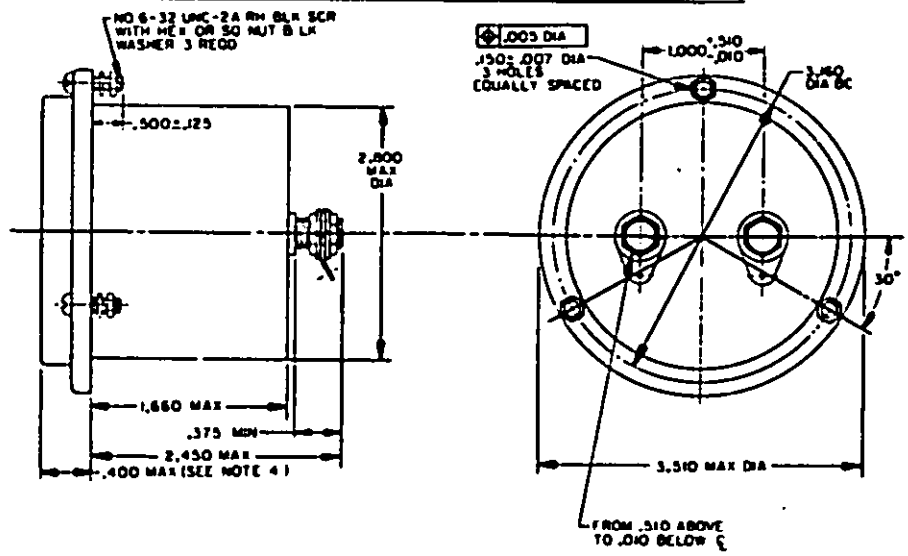

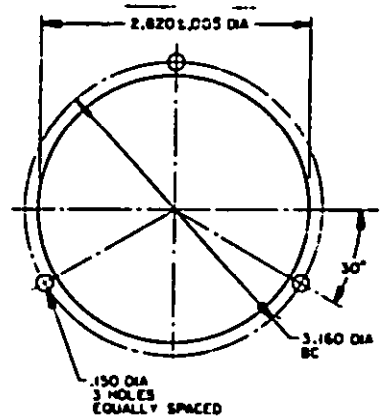

PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.400	10.16	2.800	71.12
.007	.18	.500	12.70	2.820	71.63
.010	.25	.510	12.95	3.160	80.26
.125	3.18	1.000	25.40	3.510	89.15
.150	3.81	1.660	42.16		
.375	9.53	2.450	62.23		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerance is ± 1/2° for angles.
4. Maximum projection from the front of panel including gaskets (if used).
5. For self-contained meters of 30 amperes (amp) and above, this dimension is 2(50.80 mm) max.
6. For self-contained meters of 30 amperes (amp) and above, this dimension is 2.625(66.68 mm) max.

(B) denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 20261O-17T13:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value.)

Dimensions and configuration: See figure.

Full-scale ranges: See table.

Scale:
Length: 2 inches minimum.
Pointer deflection: 90° minimum.

Position influence: ±2 percent change for 60° rotation from normal operating position.

Accuracy: ±2 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Full-scale ranges and special features.

NOTE: Special meters covered by this specification shall meet the requirements specified for similar meters, except for the following special features:

Type designation of meter 1/		Range of special meter	Special features	
Special	Similar		Resistance (nominal)	Power consumption (loss)
		direct current	ohms	millivolts ±2%
MR36*105SPECR	2/ MR36*020DCUAR	50 µA	5,000	250
MR36*106SPECR	2/ MR36*020DCUAR	100 µA	2,500	250
MR36*107SPECR	2/ MR36*020DCUAR	200 µA	1,250	250
MR36*108SPECR	2/ MR36*001DCMAR	500 µA	500	250
MR36*109SPECR	2/ MR36*001DCMAR	1 mA	100	100
MR36*110SPECR	2/ MR36*001DCMAR	1.5 mA	66-2/3	100
MR36*111SPECR	2/ MR36*001DCMAR	3 mA	33-1/3	100
MR36*112SPECR	2/ MR36*001DCMAR	5 mA	20	100
MR36*113SPECR	2/ MR36*001DCMAR	8 mA	12-1/2	100
		amperes, dc		
MR36*114SPECR	2/ MR36*010DCAAR	1-0-9	Scale marked "Charge" (to right of zero) and "Discharge" (to left of zero).	
MR36*115SPECR	2/ MR36*010DCAAR	3/ 10-0-30		
MR36*116SPECR	2/ MR36*010DCAAR	3/ 15-0-15		
MR36*117SPECR	2/ MR36*010DCAAR	4/ 25-0-75		
MR36*118SPECR	2/ MR36*010DCAAR	3/ 30-0-30		
MR36*119SPECR	2/ MR36*010DCAAR	3/ 50-0-50		
		amperes, ac		
MR36*120SPECR	5/ MR36*005ACAAR	0-80	Self-contained.	
MR36*121SPECR	5/ MR36*005ACAAR	0-100		
		volts, dc		
MR36*131SPECR	6/ MR36*2H2DCVVR	150-0-150	The range cannot be designated by the regular type designation.	

			Resistance (nominal)	Power consumption (loss)	Uniform scale marking	Number of scale divisions
		direct current	ohms	millivolts ±2%		
MR36*152SPECR	2/ MR36*020DCUAR	50 µA	5,000	250	0-100	50
MR36*153SPECR	2/ MR36*020DCUAR	100 µA	2,500	250	0-100	50
MR36*154SPECR	2/ MR36*020DCUAR	200 µA	1,250	250	0-100	50
MR36*155SPECR	2/ MR36*001DCMAR	500 µA	500	250	0-100	50
MR36*156SPECR	2/ MR36*001DCMAR	1 mA	100	100	0-100	50
MR36*157SPECR	2/ MR36*001DCMAR	1.5 mA	66-2/3	100	0-100	50
MR36*158SPECR	2/ MR36*001DCMAR	3 mA	33-1/3	100	0-100	50
MR36*159SPECR	2/ MR36*001DCMAR	5 mA	20	100	0-100	50
MR36*160SPECR	2/ MR36*001DCMAR	8 mA	12-1/2	100	0-100	50
MR36*161SPECR	2/ MR36*020DCUAR	50 µA	5,000	250	0-150	75
MR36*162SPECR	2/ MR36*020DCUAR	100 µA	2,500	250	0-150	75
MR36*163SPECR	2/ MR36*020DCUAR	200 µA	1,250	250	0-150	75
MR36*164SPECR	2/ MR36*001DCMAR	500 µA	500	250	0-150	75
MR36*165SPECR	2/ MR36*001DCMAR	1 mA	100	100	0-150	75
MR36*166SPECR	2/ MR36*001DCMAR	1.5 mA	66-2/3	100	0-150	75
MR36*167SPECR	2/ MR36*001DCMAR	3 mA	33-1/3	100	0-150	75
MR36*168SPECR	2/ MR36*001DCMAR	5 mA	20	100	0-150	75
MR36*169SPECR	2/ MR36*001DCMAR	8 mA	12-1/2	100	0-150	75

1/ The asterisk is to be replaced by a letter designating the color scheme.
2/ See MIL-M10304/12 for detail requirements.
3/ Used with external shunt.
4/ Used with 75-ampere external shunt.
5/ See MIL-M-10304/14 for detail requirements.
6/ See MIL-M-10304/11 for detail requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11,
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 6625-0347)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-157/1463

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil – Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.