PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: SPECIAL (FLUSH MOUNTING, ROUND FLANGE, 3½ INCH), STYLE 36

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

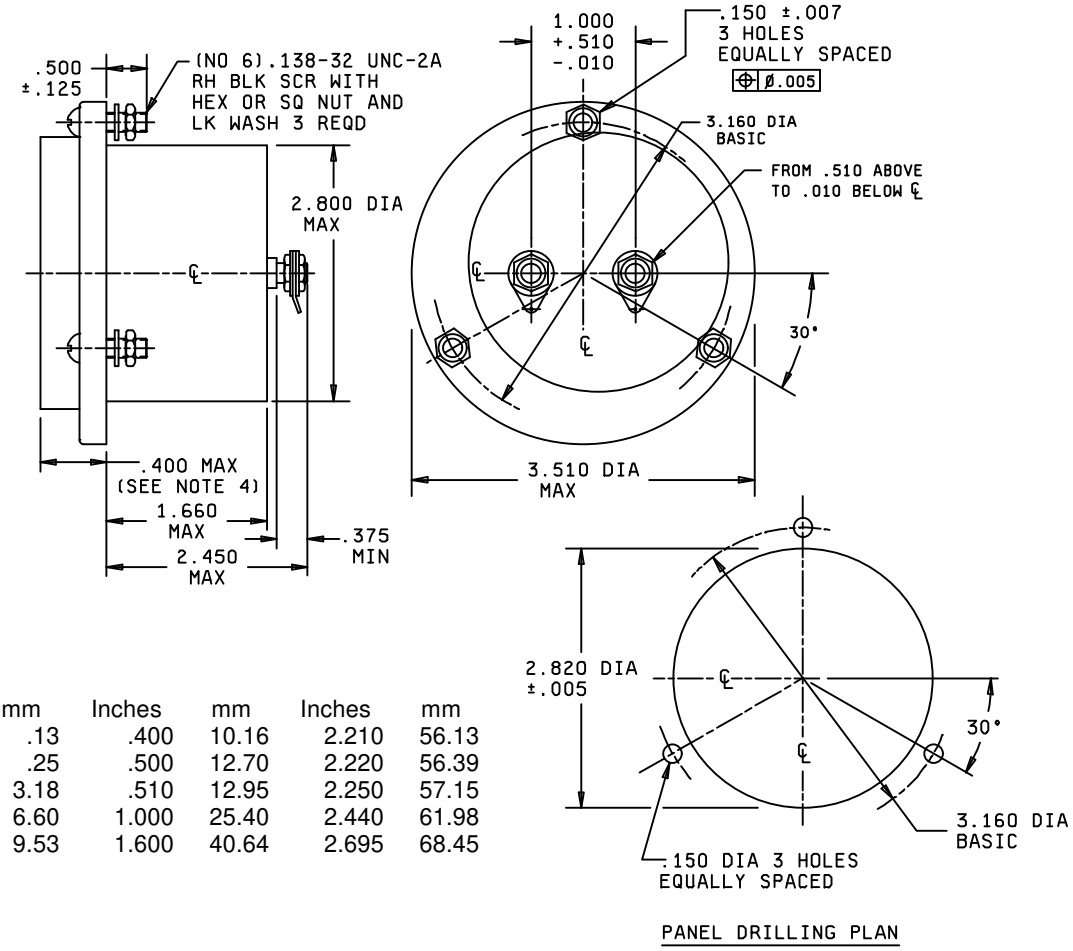

PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.400	10.16	2.210	56.13
.010	.25	.500	12.70	2.220	56.39
.125	3.18	.510	12.95	2.250	57.15
.260	6.60	1.000	25.40	2.440	61.98
.375	9.53	1.600	40.64	2.695	68.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance is ±1/2° on angles.
4. Maximum projection from front panel including gaskets (if used).
5. For self-contained meters of 30 amperes (amp) and above, this dimension is 2 (50.80 mm) max.
6. For self-contained meters of 30 amperes (amp) and above, this dimension is 2.625 (66.68 mm) max.

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value.)

Dimensions and configuration: See figure 1.

Full-scale ranges: See table I.

Scale:
Length: 2 inches minimum.
Pointer deflection: 90° minimum.

Position influence: ±2 percent change of 60° rotation from normal operating position.

Accuracy: ±2 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

TABLE I. Full-scale ranges and special features.

NOTE: Special meters covered by this specification shall meet the requirements specified for similar meters, except for the following special features:

Type designation of meter 1/		Range of special meter	Special features	
Special	Similar		Resistance (nominal)	Power consumption (loss)
		direct current	ohms	millivolts ±2%
MR36**105SPECR	2/ MR36*020DCUAR	50 µA	5,000	250
MR36**106SPECR	2/ MR36*020DCUAR	100 µA	2,500	250
MR36**107SPECR	2/ MR36*020DCUAR	200 µA	1,250	250
MR36**108SPECR	2/ MR36*001DCMAR	500 µA	500	250
MR36**109SPECR	2/ MR36*001DCMAR	1 mA	100	100
MR36**110SPECR	2/ MR36*001DCMAR	1.5 mA	66-2/3	100
MR36**111SPECR	2/ MR36*001DCMAR	3 mA	33-1/3	100
MR36**112SPECR	2/ MR36*001DCMAR	5 mA	20	100
MR36**113SPECR	2/ MR36*001DCMAR	8 mA	12-1/2	100
		amperes, dc		
MR36**114SPECR	2/ MR36*010DCAAR	1-0-9		
MR36**115SPECR	2/ MR36*010DCAAR	3/ 10-0-30		
MR36**116SPECR	2/ MR36*010DCAAR	3/ 15-0-15	Scale marked "Charge" (to right of zero) and "Discharge" (to left of zero).	
MR36**117SPECR	2/ MR36*010DCAAR	4/ 25-0-75		
MR36**118SPECR	2/ MR36*010DCAAR	3/ 30-0-30		
MR36**119SPECR	2/ MR36*010DCAAR	3/ 50-0-50		
		amperes, dc		
MR36**120SPECR	5/ MR36*005DCAAR	0-80	Self-contained.	
MR36**121SPECR	5/ MR36*005DCAAR	0-100		
		volts, dc	The range cannot be designated by the regular type designation.	
MR36**131SPECR	6/ MR36**2H2DCVVR	150-0-150		

			Resistance (nominal)	Power consumption (loss)	Uniform scale marking	Number of scale divisions
		direct current	ohms	millivolts ±2%		
MR36*152SPECR	2/ MR36*020DCUAR	50 µA	5,000	250	0-100	50
MR36*153SPECR	2/ MR36*020DCUAR	100 µA	2,500	250	0-100	50
MR36*154SPECR	2/ MR36*020DCUAR	200 µA	1,250	250	0-100	50
MR36*155SPECR	2/ MR36*001DCMAR	500 µA	500	250	0-100	50
MR36*156SPECR	2/ MR36*001DCMAR	1 mA	100	100	0-100	50
MR36*157SPECR	2/ MR36*001DCMAR	1.5 mA	66-2/3	100	0-100	50
MR36*158SPECR	2/ MR36*001DCMAR	3 mA	33-1/3	100	0-100	50
MR36*159SPECR	2/ MR36*001DCMAR	5 mA	20	100	0-100	50
MR36*160SPECR	2/ MR36*001DCMAR	8 MA	12-1/2	100	0-100	50
MR36*161SPECR	2/ MR36*020DCUAR	50 µA	5,000	250	0-150	75
MR36*162SPECR	2/ MR36*020DCUAR	100 µA	2,500	250	0-150	75
MR36*163SPECR	2/ MR36*020DCUAR	200 µA	1,250	250	0-150	75
MR36*164SPECR	2/ MR36*001DCMAR	500 µA	500	250	0-150	75
MR36*165SPECR	2/ MR36*001DCMAR	1 mA	100	100	0-150	75
MR36*166SPECR	2/ MR36*001DCMAR	1.5 mA	66-2/3	100	0-150	75
MR36*167SPECR	2/ MR36*001DCMAR	3 mA	33-1/3	100	0-150	75
MR36*168SPECR	2/ MR36*001DCMAR	5 mA	20	100	0-150	75
MR36*169SPECR	2/ MR36*001DCMAR	8 MA	12-1/2	100	0-150	75

1/ The asterisk is to be replaced by a letter designating the color scheme.
2/ See MIL-PRF-10304/12 for requirements.
3/ Used with external shunt.
4/ Used with 75-ampere external shunt.
5/ See MIL-PRF-10304/14 for requirements.
6/ See MIL-PRF-10304/11 for requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AT, AV, CR4
Navy - MC

Preparing activity:
DLA - CC

(Project 6625-0871)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:49Z
Check the source to verify that this is the current version before use.