PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 2½ INCH), STYLE 26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

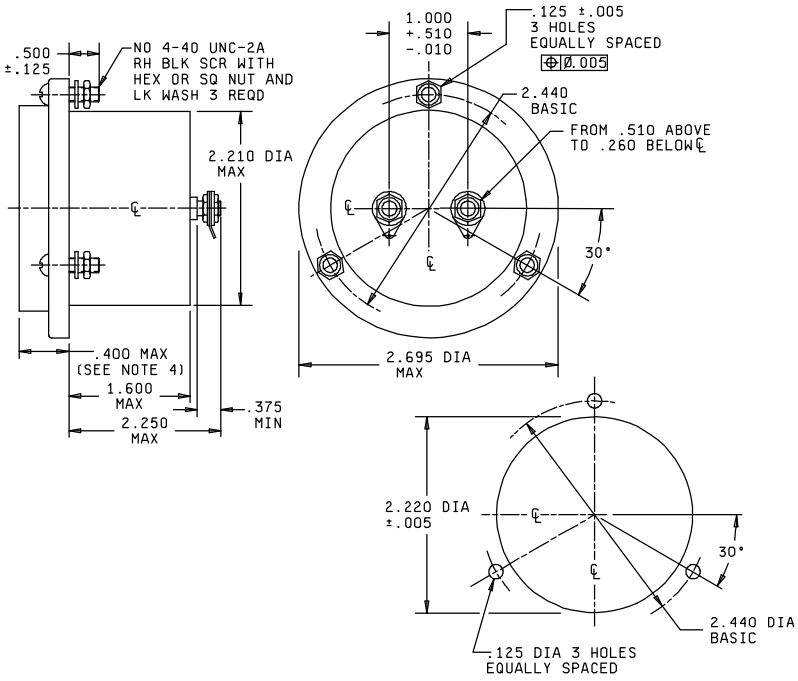

PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.400	10.16	2.210	56.13
.010	.25	.500	12.70	2.220	56.39
.112	2.84	.510	12.95	2.250	57.15
.125	3.18	1.000	25.40	2.440	61.98
.260	6.60	1.600	40.64	2.695	68.45
.375	9.53				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance is ±1/2° on angles.
4. Maximum projection from front panel including mounting gaskets (if used).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(Readings expressed as percent of full-scale value.)

Dimensions and configuration: See figure 1.

Full-scale ranges: See table I.

Scale:
Length: 1.5 inches minimum.
Pointer deflection: 90° nominal.

Position influence: ±2 percent change for 60° rotation from normal operating position.

Accuracy: ±2 percent.

Overshoot: 67 percent maximum.

Response time: 2.5 seconds maximum.

Power consumption (loss) (at end scale deflection): 4 VA maximum.

Frequency range (±2 percent change):

Nominal frequency	Extreme range
60-Hz voltmeters (AC)	25-125 Hz
400-Hz voltmeters (AF)	360-440 Hz
800-Hz voltmeters (AE)	720-880 Hz

High temperature cycling:
±3 percent
±2 percent permanent change.

Temperature influence: ±0.75 percent change.

Exposure to extreme temperatures: ±3 percent permanent change.

Overload capacity:
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3,000 volts rms.

TABLE I. Full-scale ranges.

Volts (AC, AE, AF)			
2	8	30	300
3	10	80	1/ 500
5	15	100	1/ 800
		150	

1/ Supplied with external resistor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:46Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force – 99
DLA - CC

Review activities
Army - AR, AT, AV, CR4, MI
Air Force - 11
Navy - CG, MC

Preparing activity:
DLA - CC

(Project 6625-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:46Z
Check the source to verify that this is the current version before use.