
MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: AMMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304.

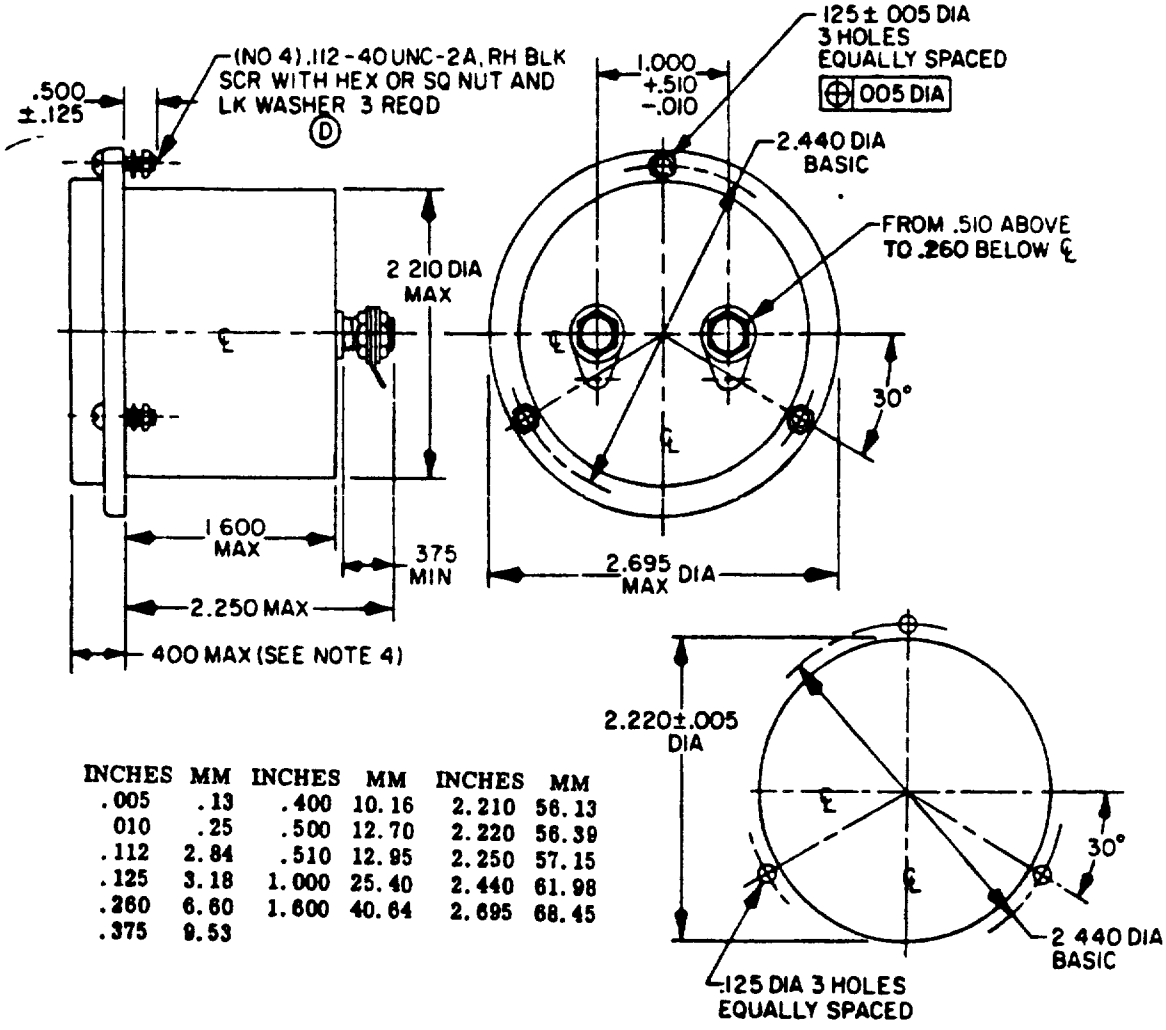

PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.400	10.16	2.210	56.13
010	.25	.500	12.70	2.220	56.39
.112	2.84	.510	12.95	2.250	57.15
.125	3.18	1.000	25.40	2.440	61.98
.260	6.60	1.600	40.64	2.695	68.45
.375	9.53				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerance is ±1/2° on angles.
4. Maximum projection from front of panel including mounting gaskets (if used)

Ⓓ denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value)

Dimensions and configuration: See figure.

Full-scale ranges: See table I.

Scale:
Length: 1.5 inches minimum.
Pointer deflection: 90° nominal.

Position influence: ±2 percent change for 60° rotation from normal operating position.

Accuracy: ±2 percent.

(D) Overshoot: 67 percent maximum.

Response time 2.5 seconds maximum.

Power consumption (loss) (at end scale deflection):
Self-contained 60-Hz ammeters at 60 Hz: 1 VA maximum.
Self-contained 400-Hz ammeters at 400 Hz: 2 VA maximum
Self-contained 800-Hz ammeters at 800 Hz: 3.5 VA maximum.

Frequency range (±2 percent change):

Nominal frequency	Extreme range
60-Hz ammeters (AC)	45-125 Hz
400-Hz ammeters (AF)	360-440 Hz
800-Hz ammeters (AE)	720-880 Hz

High temperature cycling:
±2 percent.
±2 percent permanent change.

Temperature influence: ±0.5 percent change.

Exposure to extreme temperatures:
±3 percent permanent change.

Overload capacity:
Momentary overload: ±2 percent change.
Sustained overload.
±1 percent temporary zero shift
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3,000 volts rms.

TABLE I. Full-scale ranges.

Milliamperes (AC, AE, AF)		Amperes (AC, AE, AF)		
5	100	1	10	1/ 50
10	200	2	15	1/ 100
20	300	5	20	1/ 200
30	500		30	1/ 300
50				1/ 500

1/ Used with external transformer. Current through meter at full-scale deflection shall be 5 amperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL, AV, AT, ME, WC
Navy - EC, MC
Air Force - 11
DSA - ES

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 6625-0574-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Avionics Research and Development Activity
ATTN: DAVAA-S/PE
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last First MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City, State ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil/online/start/ 2020-10-17T13:47Z
Check the source to verify that this is the current version before use.