MIL-M-10304/8B
17 December 1975
SUPERSEDING
MIL-M-10304/8A
14 June 1965

MILITARY SPECIFICATION SHEET


METERS, ELECTRICAL INDICATING, AMMETERS, RF, PANEL TYPE, RUGGEDIZED

(FLUSH MOUNTING, ROUND FLANGE, 2-1/2-INCH)

STYLES 26 AND 28

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304.

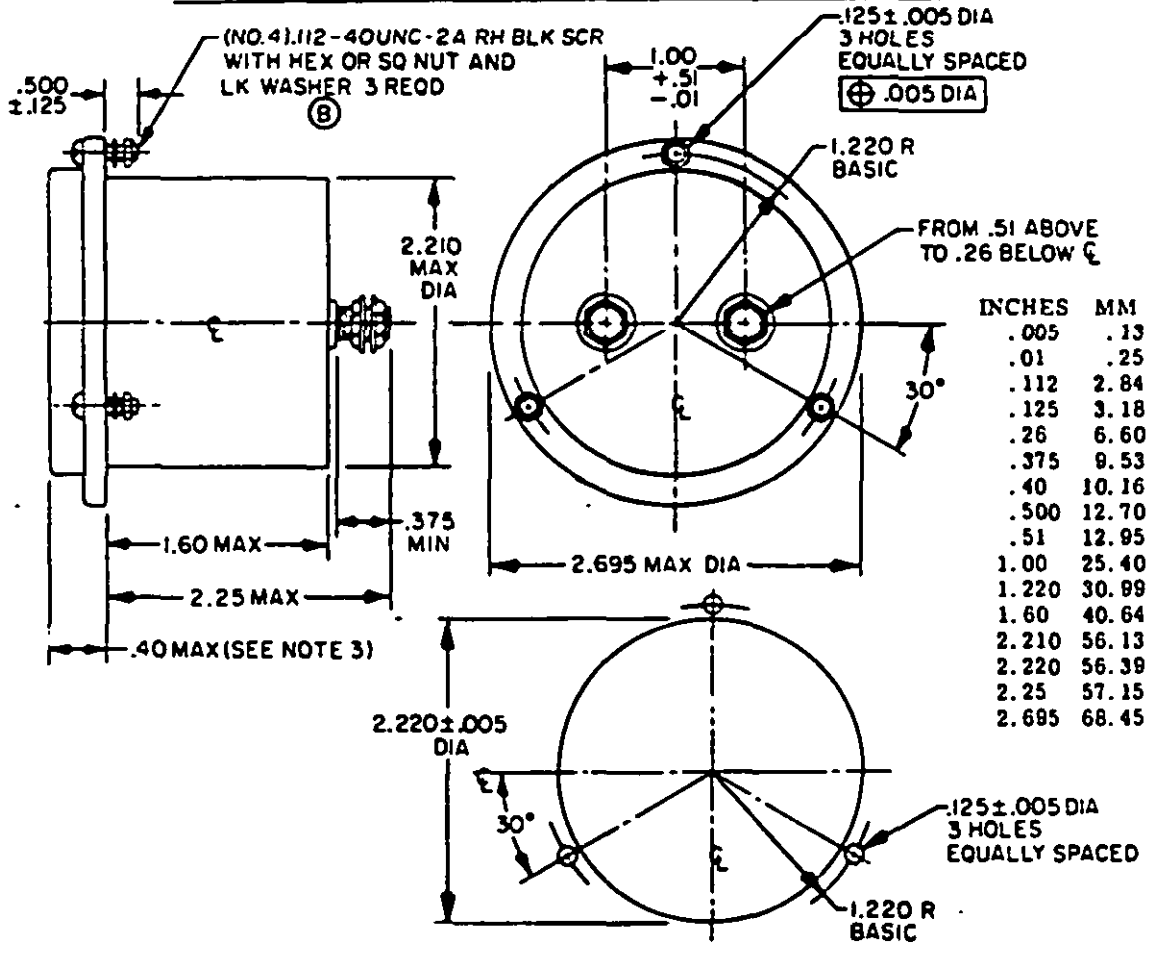

INCHES	MM
.005	.13
.01	.25
.112	2.84
.125	3.18
.26	6.60
.375	9.53
.40	10.16
.500	12.70
.51	12.95
1.00	25.40
1.220	30.99
1.60	40.64
2.210	56.13
2.220	56.39
2.25	57.15
2.695	68.45

PANEL DRILLING PLAN

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Maximum projection from front of panel including mounting gaskets (if used).
4. Tolerance is ±1/2° on angles. Ⓑ denotes changes

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value.)

Dimensions and configuration:
See figure.

Full-scale ranges: See table I.

Scale:
Length: 1.5 inches minimum.
Pointer deflection: 90° minimum.

Color scheme: W, B, F, or S.

Position influence: ±2 percent change for 60° rotation from normal operating position.

Table I. Full-scale ranges. 1/

Milliamperes (RF, RL)	Amperes (RF, RL)	
100	1	10
200	2	20
500	5	

1/ Operating frequencies: 25 hertz (Hz) to 30 MHz. Tested at 60 Hz.

Accuracy: ±2 percent at 60 Hz.

(ii) Overshoot: 40 percent maximum.

Response time: 2.5 seconds maximum.

Power consumption (loss):
Voltage drop at 60 Hz across the heating element at full-scale deflection shall not exceed:

Ranges	Volts
150 milliamperes and less	1.40
151 to 999 milliamperes, incl.	0.8
1 to 9.9 amperes, incl	0.5
10 amperes and over	0.25

High temperature cycling:
±8 percent change at 65°C.
±3 percent permanent change.

Exposure to extreme temperatures:
±16 percent change at -55°C.
± 3 percent permanent change.

Overload capacity:
Short-time overload:
±2 percent permanent change.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T13:47Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS: -Continued

Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3,000 volts rms.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - AV, AT, ME, WC
Navy - EC, MC
Air Force - 11

User activities:
Army - MI
Navy - CG
Air Force - None

Preparing activity:
Army - EL

(Project 6625-0574-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. *Fold on lines on reverse side, staple in corner, and send to preparing activity.* Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-M-10304/8B METERS, ELECTRICAL INDICATING, AMMETERS, RF, PANEL TYPE, RUGGEDIZED (FLUSH MOUNTING, ROUND FLANGE, 2½ INCH) STYLES 26 AND 28

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.