INCH-POUND
MIL-PRF-10304/8C
18 January 2008
SUPERSEDING
MIL-M-10304/8B
17 December 1975

PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, AMMETERS, RF, PANEL TYPE, RUGGEDIZED: (FLUSH MOUNTING, ROUND FLANGE, 2.5 INCH) STYLES 26 AND 28

Inactive for new design after November 4, 1997

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-10304.

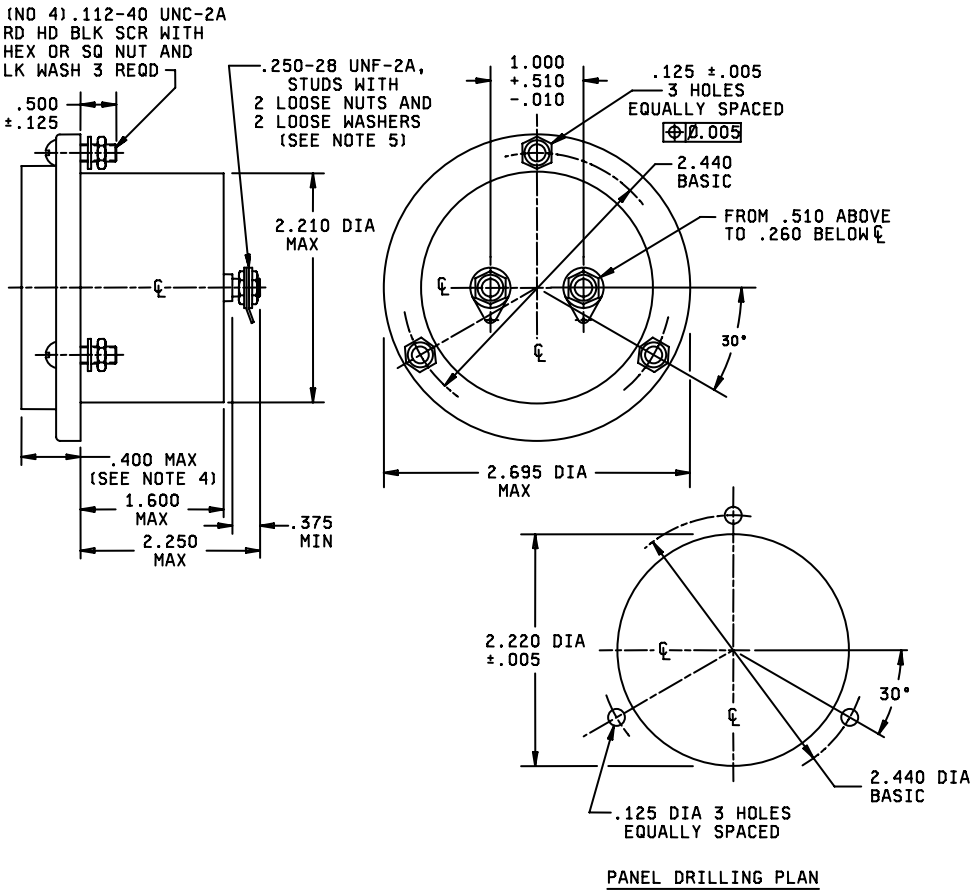


FIGURE 1. Meter, panel type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	.13	.375	9.53	2.210	56.13
.010	.25	.400	10.16	2.220	56.39
.112	2.84	.500	12.70	2.250	57.15
.125	3.18	.510	12.95	2.440	61.98
.250	6.35	1.000	25.40	2.695	68.45
.260	6.60	1.600	40.64		

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerances are ± .015 inch for two place (.XX), and ± .005 inch for three place (.XXX) dimensions.
2. Tolerance is ± 0.5 (½) degree on angles.
3. Metric equivalents are given for general information only.
4. Maximum projection from front panel including mounting gaskets (if used).
5. Other forms of terminals, as specified in MIL-PRF-10304, are permitted. The specified minimum length applies to stud-type terminals only. Terminals shall be equally spaced, from each side of vertical centerline

FIGURE 1. Meter, panel type – Continued.

REQUIREMENTS:
(Readings expressed as percent of full-scale value.)

Dimensions and configuration: See figure 1.

Full-scale ranges: See table I.

Scale:
Length: 1.5 inches minimum.
Pointer deflection: 90 degrees nominal.

Color scheme: W, B, and F.

Position influence: ± 2 percent change for 60 degrees rotation from normal operating position.

Accuracy: ± 2 percent at 60 Hz.

Overshoot: 40 percent maximum.

Response time: 2.5 seconds maximum.

Power consumption (loss):
Voltage drop at 60 Hz across the heating element at full scale deflection shall not exceed:

Ranges	Volts
150 milliamperes and less	1.40
Over 150 milliamperes to 1 ampere	0.8
Over 1 to 10 amperes	0.5
Over 10 amperes	0.25

High temperature cycling:
± 8 percent change at 65 degrees C.
± 3 percent permanent change.

Exposure to extreme temperatures:
± 16 percent change at – 55 degrees C.
± 3 percent permanent change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

Overload capacity:
Momentary overload: ± 2 percent permanent change.
Sustained overload:
± 1 percent temporary zero shift.
± 1 percent permanent zero shift.
± 2 percent permanent change.

Dielectric withstanding voltage: 3,000 volts rms.

TABLE I. Full-scale ranges. 1/

Milliamperes (AC, AE, AF)	Amperes (RF, RL)	
100	1	10
200	2	20
500	5	

1/ Operating frequencies: 25 Hz to 30 MHz. Tested at 60 Hz.

The Qualified Products List (QPL) associated with this inactive for new design specification sheet will be maintained until acquisition of the product is no longer required, whereupon the specification and QPL will be canceled.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. This document references MIL-PRF-10304.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 99
DLA – CC

Preparing activity:
DLA – CC

(Project 6625-0937-000)

Review activities:
Army – AV, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at **http://assist.daps.dla.mil**.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.