PERFORMANCE SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: SPECIAL (FLUSH MOUNTING, ROUND FLANGE, 2½ INCH), STYLE 26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the meters described herein shall consist of this specification and MIL-PRF-10304.

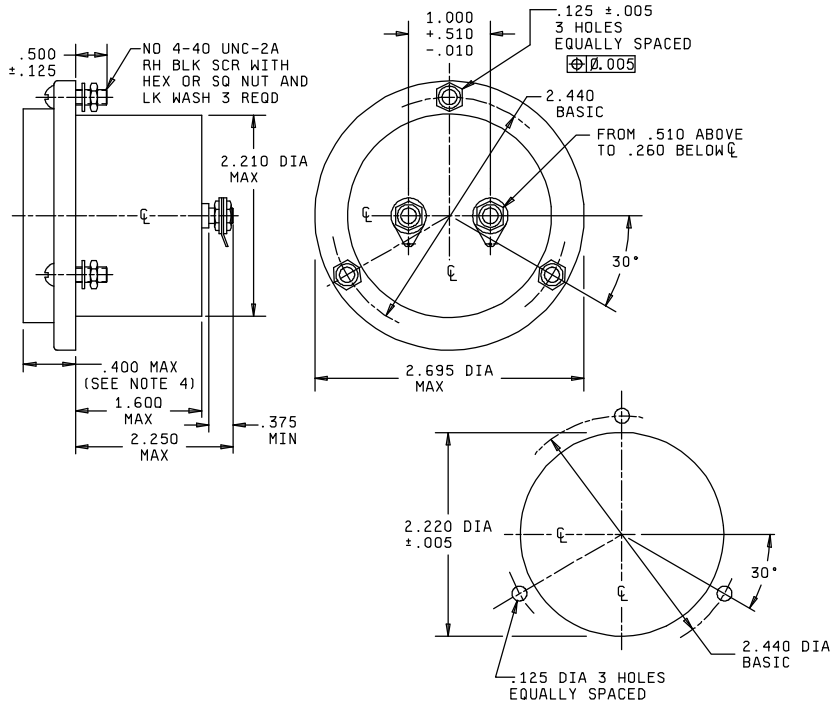

PANEL DRILLING PLAN

Inches	mm	Inches	mm	Inches	mm
.005	.13	.400	10.16	2.210	56.13
.010	.25	.500	12.70	2.220	56.39
.112	2.84	.510	12.95	2.250	57.15
.125	3.18	1.000	25.40	2.440	61.98
.260	6.60	1.600	40.64	2.695	68.45
.375	9.53				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance is ±1/2° on angles.
4. Maximum projection from front panel including mounting gaskets (if used).

FIGURE 1. Meter, panel type.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(See tables I and II.)

Dimensions and configuration: See figure 1 and table I.

Full-scale ranges: See table II.

Scale:
Length: 1.5 inches minimum.
Pointer deflection: 90° minimum.

Position influence: ±2 percent change of full-scale length for 60° rotation from normal operating position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

TABLE I. Special features, meter MR26M297SPECR.

NOTE: Special meter MR26M297SPECR shall meet the requirements specified for meter MR26*020DCUAR, except for the following features:

Special	Similar	DC			Ohms		AC volts		
MR26M297SPECR	MR26*020DCUAR	Scale		µA	Scale	µA	Scale		µA
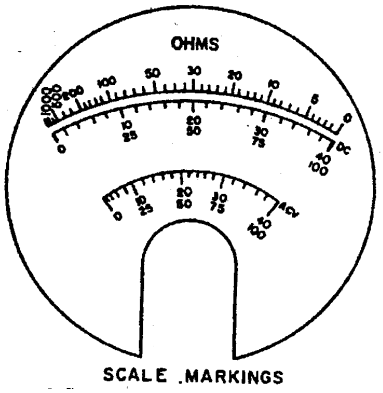		0	0	0	∞	0	0	0	0
		2	5	12.5	1,000	8.5	2	5	4
		4	10	25	750	10	4	10	10.5
		6	15	37.5	500	15	6	15	20
		8	20	50	400	18	8	20	30.5
		10	25	62.5	300	24	10	25	42.5
		12	30	75	200	34.5	12	30	55
		14	35	87.5	180	37	14	35	69
		16	40	100	160	40.5	16	40	83
		18	45	112.5	140	45.5	18	45	97
		20	50	125	120	52	20	50	111.5
		22	55	137.5	100	60	22	55	126
		24	60	150	90	64	24	60	141
Colors:		26	65	162.5	80	69.25	26	65	155.5
Dial..... Flat white, Munsell No. N8.0		28	70	175	70	76.5	28	70	170
Markings, numerals, and letters"		30	75	187.5	60	85	30	75	184
Resistance scale .. Green, Munsell No. 2.5G5/8		32	80	200	50	94	32	80	198
Dc voltage and		34	85	212.5	45	98	34	85	211
current scale ..... Black, Munsell No. N1.0		36	90	225	40	104	36	90	224
AC voltage scale... Purple-blue, Munsell		38	95	237.5	35	113	38	95	237
No. 5.OPB3/12		40	100	250	30	124	40	100	250
					28	129			
Kind of pointer.....Knife edge					26	134.5			
					24	140			
					22	145			
Maximum projection with meter mounted on					20	150			
3/8-inch panel:					18	155.5			
in front of panel..... 41/64 inch					16	161			
Barrel depth behind panel¾ inch.					14	169			
(A plastic space, if necessary to accomplish with					12	178			
above, may be utilized and must be furnished					10	187.5			
the meter.)					9	193.5			
Dc range ..... 250 µA ±2 percent					8	19			
Power consumption (loss): 62.5 mV ±2 percent					7	204.5			
at 25° ±2°C					6	210			
250 ohms nominal at					5	215.5			
25° ±2°C					4	221.5			
270 ohms nominal at					3	228			
55° ±2°C					2	234.5			
210 ohms nominal at					1	242			
40° ±2°C					0	250			

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

TABLE II. Full-scale ranges and special features (except MR26M297SPECR).

NOTE: Special meters covered by this specification shall meet the requirements specified for similar meters, except for the following special features:

Type designation of meter 1/		Range of special meter	Special features	
Special	Similar		Resistance (nominal)	Power consumption (loss)
		direct current	ohms	millivolts ±2%
MR2**105SPECR	2/ MR26*020DCUAR	50 µA	5,000	250
MR2**106SPECR	2/ MR26*020DCUAR	100 µA	2,500	250
MR2**107SPECR	2/ MR26*020DCUAR	200 µA	1,250	250
MR2**108SPECR	2/ MR26*001DCMAR	500 µA	500	250
MR2**109SPECR	2/ MR26*001DCMAR	1 mA	100	100
MR2**110SPECR	2/ MR26*001DCMAR	1.5 mA	66-2/3	100
MR2**111SPECR	2/ MR26*001DCMAR	3 mA	33-1/3	100
MR2**112SPECR	2/ MR26*001DCMAR	5 mA	20	100
MR2**113SPECR	2/ MR26*001DCMAR	8 MA	12-1/2	100
		amperes, dc		
MR2**114SPECR	2/ MR26*010DCAAR	1-0-9		
MR2**115SPECR	2/ MR26*010DCAAR	3/ 10-0-30		
MR2**116SPECR	2/ MR26*010DCAAR	3/ 15-0-15	Scale marked "Charge" (to right of zero) and "Discharge" (to left of zero).	
MR2**117SPECR	2/ MR26*010DCAAR	3/ 25-0-75		
MR2**118SPECR	2/ MR26*010DCAAR	3/ 30-0-30		
MR2**119SPECR	2/ MR26*010DCAAR	3/ 50-0-50		
		volts, dc		
MR2**130SPECR	5/ MR26**300DCVVR	15-0-15	The range cannot be designated by the regular type designation.	
MR2**131SPECR	5/ MR26**300DCVVR	150-0-150		

			Resistance (nominal)	Power consumption (loss)	Uniform scale marking	Number of scale divisions
		direct current	ohms	millivolts ±2%		
MR2**152SPECR	2/ MR26*020DCUAR	50 µA	5,000	250	0-100	20
MR2**153SPECR	2/ MR26*020DCUAR	100 µA	2,500	250	0-100	20
MR2**154SPECR	2/ MR26*020DCUAR	200 µA	1,250	250	0-100	20
MR2**155SPECR	2/ MR26*001DCMAR	500 µA	500	250	0-100	20
MR2**156SPECR	2/ MR26*001DCMAR	1 mA	100	100	0-100	20
MR2**157SPECR	2/ MR26*001DCMAR	1.5 mA	66-2/3	100	0-100	20
MR2**158SPECR	2/ MR26*001DCMAR	3 mA	33-1/3	100	0-100	20
MR2**159SPECR	2/ MR26*001DCMAR	5 mA	20	100	0-100	20
MR2**160SPECR	2/ MR26*001DCMAR	8 MA	12-1/2	100	0-100	20
MR2**161SPECR	2/ MR26*020DCUAR	50 µA	5,000	250	0-150	30
MR2**162SPECR	2/ MR26*020DCUAR	100 µA	2,500	250	0-150	30
MR2**163SPECR	2/ MR26*020DCUAR	200 µA	1,250	250	0-150	30
MR2**164SPECR	2/ MR26*001DCMAR	500 µA	500	250	0-150	30
MR2**165SPECR	2/ MR26*001DCMAR	1 mA	100	100	0-150	30
MR2**166SPECR	2/ MR26*001DCMAR	1.5 mA	66-2/3	100	0-150	30
MR2**167SPECR	2/ MR26*001DCMAR	3 mA	33-1/3	100	0-150	30
MR2**168SPECR	2/ MR26*001DCMAR	5 mA	20	100	0-150	30
MR2**169SPECR	2/ MR26*001DCMAR	8 MA	12-1/2	100	0-150	30

1/ The asterisk is to be replaced by a letter designating the color scheme.
2/ See MIL-PRF-10304/5 for requirements.
3/ Used with external shunt.
4/ Used with 75-ampere external shunt.
5/ See MIL-PRF-10304/4 for requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Air Force - 11
Army - AR, AT, AV, CR4
Navy - MC

Preparing activity:
DLA - CC

(Project 6625-0866)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.