
INCH-POUND
MIL-PRF-10304/9C
w/AMENDMENT 1
18 January 2008
SUPERSEDING
MIL-PRF-10304/9C
26 April 1999

PERFORMANCE SPECIFICATION SHEET

# METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED: SPECIAL (FLUSH MOUNTING, ROUND FLANGE, 2.5 INCH), STYLE 26

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-10304.

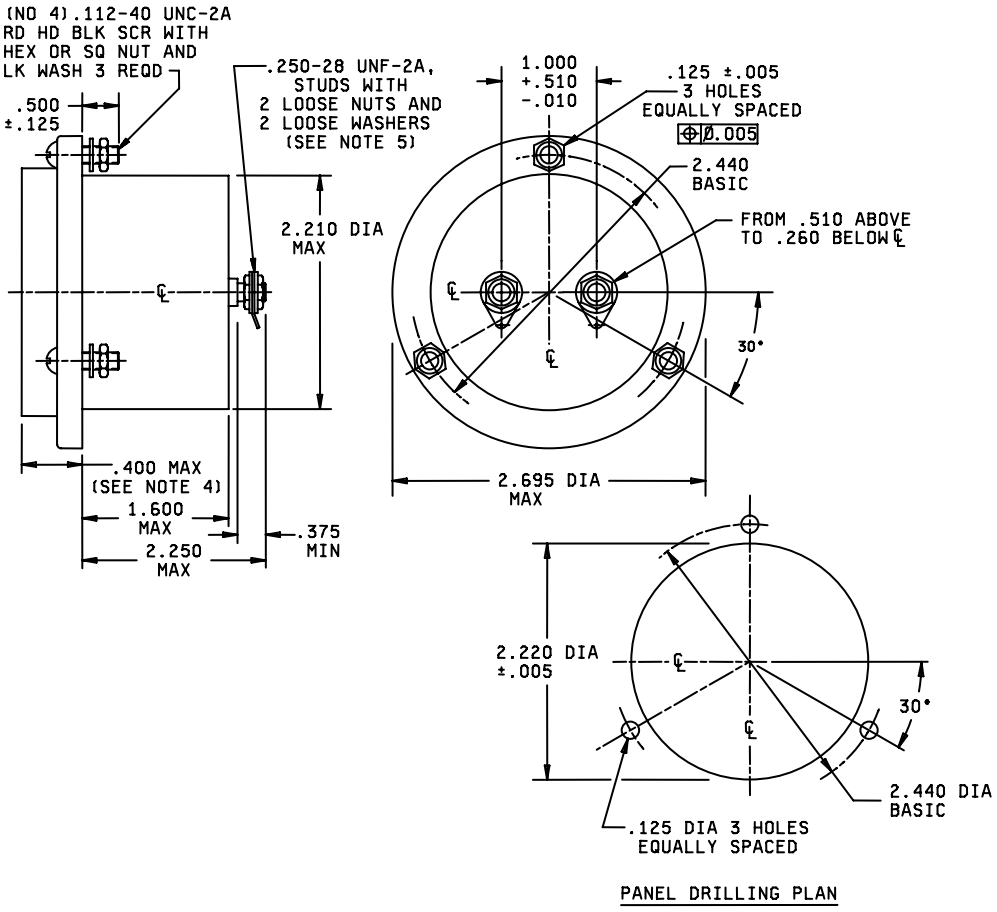


PANEL DRILLING PLAN

FIGURE 1. Meter, panel type.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .005 | .13 | .375 | 9.53 | 2.210 | 56.13 |
| .010 | .25 | .400 | 10.16 | 2.220 | 56.39 |
| .112 | 2.84 | .500 | 12.70 | 2.250 | 57.15 |
| .125 | 3.18 | .510 | 12.95 | 2.440 | 61.98 |
| .250 | 6.35 | 1.000 | 25.40 | 2.695 | 68.45 |
| .260 | 6.60 | 1.600 | 40.64 | | |

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerances are ± .015 inch for two place (.XX) and ± .005 inch for three place (.XXX) dimensions.
2. Tolerance is ± 0.5 (½) degree on angles.
3. Metric equivalents are given for general information only.
4. Maximum projection from front panel including mounting gaskets (if used).
5. Other forms of terminals, as specified in MIL-PRF-10304, are permitted. The specified minimum length applies to stud-type terminals only. Terminals shall be equally spaced, from each side of vertical centerline.

FIGURE 1. Meter, panel type – Continued.

REQUIREMENTS:
(See tables I and II.)

Dimensions and configuration: See figure 1 and table I.

Full-scale ranges: See table II.


Scale:
Length: 1.5 inches minimum.
Pointer deflection: 90 degrees minimum.

Position influence: ± 2 percent change of full-scale length for 60 degrees rotation from normal operating position.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

TABLE I. Special features, meter MR26M297SPECR. 1/
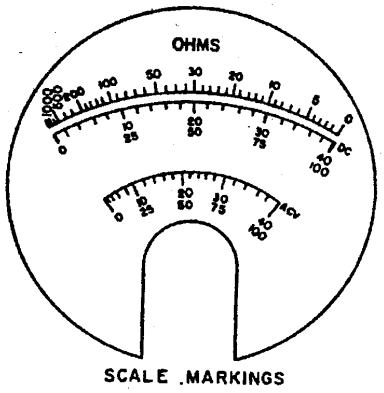
| Special | Similar | DC | | | Ohms | | AC volts | | |
|---|---|---|---|---|---|---|---|---|---|
| MR26M297SPECR | MR26*020DCUAR | Scale | | μA | Scale | μA | Scale | | μA |
|  | | 0 | 0 | 0 | ∞ | 0 | 0 | 0 | 0 |
| | | 2 | 5 | 12.5 | 1,000 | 8.5 | 2 | 5 | 4 |
| | | 4 | 10 | 25 | 750 | 10 | 4 | 10 | 10.5 |
| | | 6 | 15 | 37.5 | 500 | 15 | 6 | 15 | 20 |
| | | 8 | 20 | 50 | 400 | 18 | 8 | 20 | 30.5 |
| | | 10 | 25 | 62.5 | 300 | 24 | 10 | 25 | 42.5 |
| | | 12 | 30 | 75 | 200 | 34.5 | 12 | 30 | 55 |
| | | 14 | 35 | 87.5 | 180 | 37 | 14 | 35 | 69 |
| | | 16 | 40 | 100 | 160 | 40.5 | 16 | 40 | 83 |
| | | 18 | 45 | 112.5 | 140 | 45.5 | 18 | 45 | 97 |
| | | 20 | 50 | 125 | 120 | 52 | 20 | 50 | 111.5 |
| | | 22 | 55 | 137.5 | 100 | 60 | 22 | 55 | 126 |
| | | 24 | 60 | 150 | 90 | 64 | 24 | 60 | 141 |
| | | 26 | 65 | 162.5 | 80 | 69.25 | 26 | 65 | 155.5 |
| | | 28 | 70 | 175 | 70 | 76.5 | 28 | 70 | 170 |
| | | 30 | 75 | 187.5 | 60 | 85 | 30 | 75 | 184 |
| | | 32 | 80 | 200 | 50 | 94 | 32 | 80 | 198 |
| | | 34 | 85 | 212.5 | 45 | 98 | 34 | 85 | 211 |
| | | 36 | 90 | 225 | 40 | 104 | 36 | 90 | 224 |
| | | 38 | 95 | 237.5 | 35 | 113 | 38 | 95 | 237 |
| | | 40 | 100 | 250 | 30 | 124 | 40 | 100 | 250 |
| | | | | | 28 | 129 | | | |
| | | | | | 26 | 134.5 | | | |
| | | | | | 24 | 140 | | | |
| | | | | | 22 | 145 | | | |
| | | | | | 20 | 150 | | | |
| | | | | | 18 | 155.5 | | | |
| | | | | | 16 | 161 | | | |
| | | | | | 14 | 169 | | | |
| | | | | | 12 | 178 | | | |
| | | | | | 10 | 187.5 | | | |
| | | | | | 9 | 193.5 | | | |
| | | | | | 8 | 19 | | | |
| | | | | | 7 | 204.5 | | | |
| | | | | | 6 | 210 | | | |
| | | | | | 5 | 215.5 | | | |
| | | | | | 4 | 221.5 | | | |
| | | | | | 3 | 228 | | | |
| | | | | | 2 | 234.5 | | | |
| | | | | | 1 | 242 | | | |
| | | | | | 0 | 250 | | | |

Colors:
Dial ..... Flat white, Munsell No. N8.0
Markings, numerals, and letters"
Resistance scale ... Green, Munsell No. 2.5G5/8
Dc voltage and
current scale ..... Black, Munsell No. N1.0
AC voltage scale ... Purple-blue, Munsell No. 5.OPB3/12
Kind of pointer ..... Knife edge

Maximum projection with meter mounted on 0.375 (3/8)-inch panel:
in front of panel ..... 0.641 (41/64) inch
Barrel depth behind panel 0.75 (¾) inch.
(A plastic spacer, if necessary to accomplish the above, may be utilized and must be furnished with the meter.)

DC range ..... 250 μA ± 2 percent
Power consumption (loss): 62.5 mV ± 2 percent at 25 ± 2 degrees C
250 ohms nominal at 25 ± 2 degrees C
270 ohms nominal at 55 ± 2 degrees C
210 ohms nominal at 40 ± 2 degrees C

1/ Special meter MR26M297SPECR shall meet the requirements specified for meter MR26*020DCUAR, except for the features shown above in table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

TABLE II. Full-scale ranges and special features (except MR26M297SPECR).

| Type designation of meter 1/ | | Range of special meter | Special features 6/ | |
|---|---|---|---|---|
| Special | Similar | | Resistance (nominal) | Power consumption (loss) |
| | | direct current | ohms | millivolts ± 2 % |
| MR2**105SPECR | MR26*020DCUAR 2/ | 50 μA | 5,000 | 250 |
| MR2**106SPECR | MR26*020DCUAR 2/ | 100 μA | 2,500 | 250 |
| MR2**107SPECR | MR26*020DCUAR 2/ | 200 μA | 1,250 | 250 |
| MR2**108SPECR | MR26*001DCMAR 2/ | 500 μA | 500 | 250 |
| MR2**109SPECR | MR26*001DCMAR 2/ | 1 mA | 100 | 100 |
| MR2**110SPECR | MR26*001DCMAR 2/ | 1.5 mA | 66.67 | 100 |
| MR2**111SPECR | MR26*001DCMAR 2/ | 3 mA | 33.33 | 100 |
| MR2**112SPECR | MR26*001DCMAR 2/ | 5 mA | 20 | 100 |
| MR2**113SPECR | MR26*001DCMAR 2/ | 8 MA | 12.50 | 100 |
| | | amperes, dc | | |
| MR2**114SPECR | MR26*010DCAAR 2/ | 1-0-9 | | |
| MR2**115SPECR | MR26*010DCAAR 2/ | 10-0-30 3/ | Scale marked "Charge" (to right of zero) and "Discharge" (to left of zero). | |
| MR2**116SPECR | MR26*010DCAAR 2/ | 15-0-15 3/ | | |
| MR2**117SPECR | MR26*010DCAAR 2/ | 25-0-75 4/ | | |
| MR2**118SPECR | MR26*010DCAAR 2/ | 30-0-30 3/ | | |
| MR2**119SPECR | MR26*010DCAAR 2/ | 50-0-50 3/ | | |
| | | volts, dc | | |
| MR2**130SPECR | MR26**300DCVVR 5/ | 15-0-15 | The range cannot be designated by the regular type designation. | |
| MR2**131SPECR | MR26**300DCVVR 5/ | 150-0-150 | | |

| | | | Resistance (nominal) | Power consumption (loss) | Uniform scale marking | Number of scale divisions |
|---|---|---|---|---|---|---|
| | | direct current | ohms | millivolts ± 2% | | |
| MR2**152SPECR | MR26*020DCUAR 2/ | 50 μA | 5,000 | 250 | 0-100 | 20 |
| MR2**153SPECR | MR26*020DCUAR 2/ | 100 μA | 2,500 | 250 | 0-100 | 20 |
| MR2**154SPECR | MR26*020DCUAR 2/ | 200 μA | 1,250 | 250 | 0-100 | 20 |
| MR2**155SPECR | MR26*001DCMAR 2/ | 500 μA | 500 | 250 | 0-100 | 20 |
| MR2**156SPECR | MR26*001DCMAR 2/ | 1 mA | 100 | 100 | 0-100 | 20 |
| MR2**157SPECR | MR26*001DCMAR 2/ | 1.5 mA | 66.67 | 100 | 0-100 | 20 |
| MR2**158SPECR | MR26*001DCMAR 2/ | 3 mA | 33.33 | 100 | 0-100 | 20 |
| MR2**159SPECR | MR26*001DCMAR 2/ | 5 mA | 20 | 100 | 0-100 | 20 |
| MR2**160SPECR | MR26*001DCMAR 2/ | 8 MA | 12.50 | 100 | 0-100 | 20 |
| MR2**161SPECR | MR26*020DCUAR 2/ | 50 μA | 5,000 | 250 | 0-150 | 30 |
| MR2**162SPECR | MR26*020DCUAR 2/ | 100 μA | 2,500 | 250 | 0-150 | 30 |
| MR2**163SPECR | MR26*020DCUAR 2/ | 200 μA | 1,250 | 250 | 0-150 | 30 |
| MR2**164SPECR | MR26*001DCMAR 2/ | 500 μA | 500 | 250 | 0-150 | 30 |
| MR2**165SPECR | MR26*001DCMAR 2/ | 1 mA | 100 | 100 | 0-150 | 30 |
| MR2**166SPECR | MR26*001DCMAR 2/ | 1.5 mA | 66.67 | 100 | 0-150 | 30 |
| MR2**167SPECR | MR26*001DCMAR 2/ | 3 mA | 33.33 | 100 | 0-150 | 30 |
| MR2**168SPECR | MR26*001DCMAR 2/ | 5 mA | 20 | 100 | 0-150 | 30 |
| MR2**169SPECR | MR26*001DCMAR 2/ | 8 MA | 12.50 | 100 | 0-150 | 30 |

1/ The asterisk is to be replaced by a letter designating the color scheme.
2/ See MIL-PRF-10304/5 for requirements.
3/ Used with external shunt.
4/ Used with 75-ampere external shunt.
5/ See MIL-PRF-10304/4 for requirements.
6/ Special meters covered by this specification shall meet the requirements specified for similar meters, except for the special features.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-10304, this document references the following:

MIL-PRF-10304/4
MIL-PRF-10304/5

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 6625-2006-008)

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at **http://assist.daps.dla.mil**.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:47Z
Check the source to verify that this is the current version before use.