NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/143
15 November 1996
SUPERSEDING
MIL-B-41809/2G
21 September 1994

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, JOINT CHIEFS OF STAFF

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

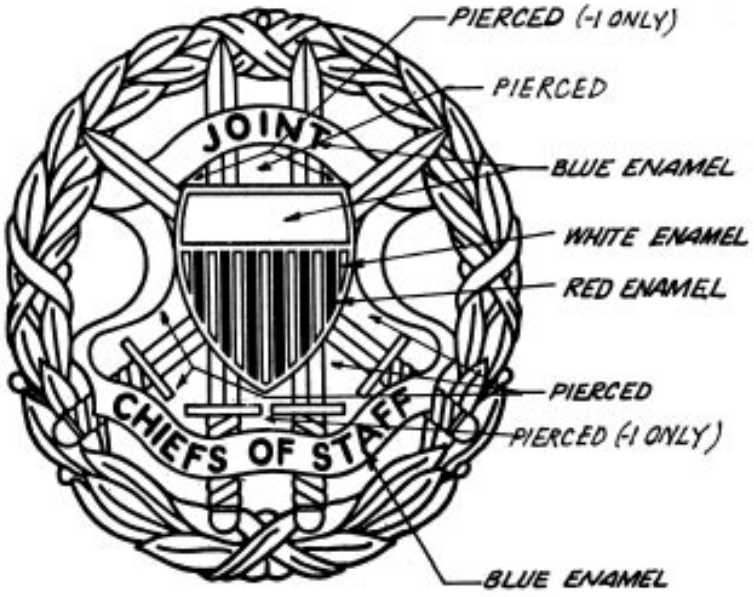

MATERIAL:
WREATH: Red Brass or Gilding Metal
DEVICE: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:
WREATH: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
DEVICE: Hard Enameled, Gold Plated, Rose Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 19.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

		WREATH	DEVICE
HEIGHT (Overall):			
	-1:	2-1/4 inch (5.72 cm)	1-15/16 inch (4.92 cm) (REF)
	-2:	1-1/2 inch (3.81 cm)	1-3/8 inch (3.49 cm) (REF)
WIDTH (Overall):			
	-1:	2 inches (5.08 cm) (REF)	1-5/8 inch (4.13 cm) (REF)
	-2:	1-3/8 inch (3.49 cm) (REF)	1-1/8 inch (2.86 cm) (REF)
THICKNESS (At Thickest Point):			
	-1:	0.095 inch ± 0.010 inch (0.241 cm ± 0.025 cm)	0.110 inch ± 0.010 inch (0.279 cm ± 0.025 cm)
	-2:	0.075 inch ± 0.010 inch (0.190 cm ± 0.025 cm)	0.085 inch ± 0.010 inch (0.215 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Red	1
Blue	18
Blue	20
White	28

3. The incised letters shall be filled with blue air dried enamel. The blue enamel color shall match TIOH chip number 20 or the standard sample.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used, rivets shall be used to attach the device to the wreath.

5. The device shall be superimposed and secured to the wreath by four rivets or soft solder. When rivets are used, they shall be located at the ends of the diagonal swords and shall be either soldered to or be an integral part of the sword.

6. Piercing shall be as indicated.

7. The attaching device shall be prong and clutch type. Three prongs shall be centered on the wreath. One prong shall be at the top of the badge and located on the vertical centerline. Two prongs shall be located on a horizontal line 7/16 inch + 0, - 1/16 inch (1.11 cm + 0, - 0.16 cm) from the lowest outside edge for Dash No. -1 and 11/32 inch + 0, - 1/32 inch (0.87 cm + 0, - 0.08 cm) from the lowest outside edge for Dash No. -2.

8. The design of the Dash No. -1 and -2 are identical with the exception of the shield on the device. The Dash No. -1 shield (shown) has 13 stripes and the shield for Dash No. -2 has 9 stripes. The stripes of both shields shall be enameled with alternating white and red; beginning with white and ending with white.

9. The following finish is permitted for commercial sale or when specified in the procurement document:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.

WREATH: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
DEVICE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0866)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.