INCH-POUND


MIL-DTL-3628/143B
21 June 2019
SUPERSEDING
MIL-DTL-3628/143A
5 August 2014

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, JOINT CHIEF OF STAFF

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

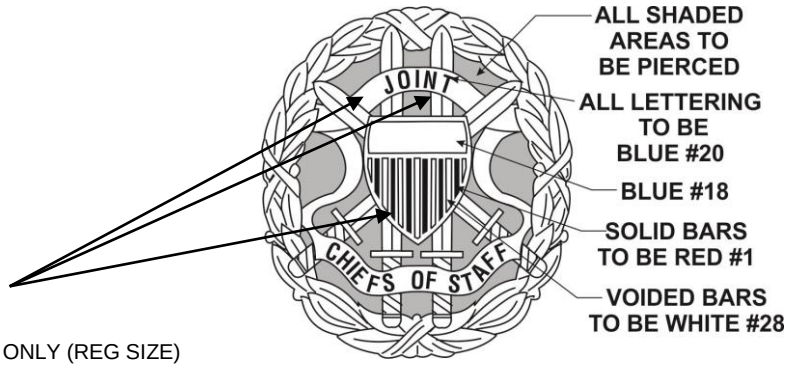

PIERCED FOR -1 ONLY (REG SIZE)

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
WREATH: Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
WREATH: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Chip Number 14.
DEVICE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
HEIGHT (Overall):
WREATH:
-1: 2-1/4 inches (REF)
-2: 1-1/2 inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.

DEVICE;
-1: 1-15/16 inches (REF)
-2: 1-3/8 inches (REF)
WIDTH (Overall):
WREATH:
-1: 2 inches (REF)
-2: 1-3/8 inches (REF)
DEVICE:
-1: 1-5/8 inches (REF)
-2: 1-1/8 inches (REF)
THICKNESS (At thickest point):
WREATH:
-1: 0.095 inch ± 0.010 inch
-2: 0.075 inch ± 0.010 inch
DEVICE:
-1: 0.110 inch ± 0.010 inch
-2: 0.085 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device shall be prong and wing type clutch.

2. Three prongs shall be centered on the wreath. One prong shall be at the top of the badge and located on the vertical centerline. Two prongs shall be located on a horizontal line 7/16 inch + 0, - 1/16 inch from the lowest outside edge for -1 and 11/32 inch + 0, - 1/32 inch from the lowest outside edge for -2.

3. The device shall be superimposed and secured to the wreath by four rivets or soft solder. When rivets are used, they shall be located at the ends of the diagonal swords and shall be either soldered to or be an integral part of the sword.

EPOXY: Epoxy resin shall be applied to the Badge Identification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard enamel is used then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
Blue	#20
White	#28

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.

2. The incised letters shall be filled with blue epoxy. The blue enamel color shall match TIOH chip number 20.

3. Rivets shall be used to attach the device to the wreath.

4. The design of the -1 and -2 are identical with the exception of the shield on the device. The -1 shield (shown) has 13 stripes and the shield for -2 has 9 stripes. The stripes of both shields shall be epoxy with alternating white and red; beginning with white and ending with white.

5. The following finish is permitted for commercial sale or when specified in the procurement document:

WREATH: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
DEVICE: Epoxy resin (Stoning epoxy), Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

6. Piercing shall be as indicated.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2019-266)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.