NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/143C
26 May 2021
SUPERSEDING
MIL-DTL-3628/143B
21 June 2019

DETAIL SPECIFICATION SHEET


BADGE, IDENTIFICATION, JOINT CHIEFS OF STAFF

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

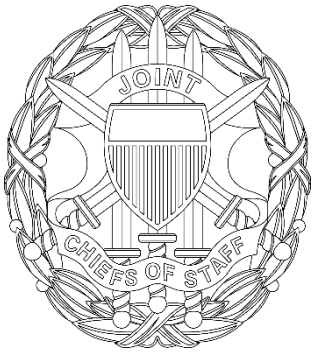


ASSEMBLED



WREATH

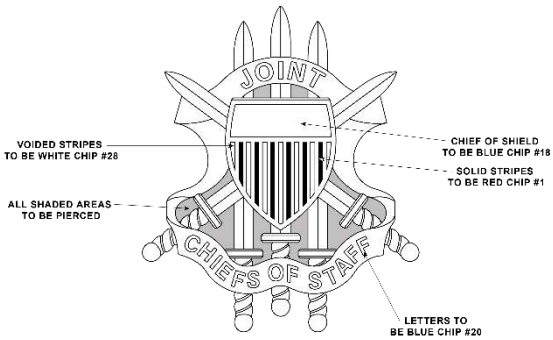

REGULAR DEVICE



MINIATURE DEVICE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
WREATH: Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: Red Brass 85/15(UNS Alloy No. C-230)

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.

FINISH:
WREATH: Nickel Plated, Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.
DEVICE: Epoxy resin, 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
HEIGHT: (Overall)
-1: Wreath: 2-1/4 inches (REF)
Device: 2-1/16 inches (REF)
-2: Wreath: 1-1/2 inches (REF)
Device: 1-3/8 inches (REF)
WIDTH: (Overall)
-1: Wreath: 2 inches (REF)
Device: 1-3/4 inches (REF)
-2: Wreath: 1-11/32 inch (REF)
Device: 1-3/16 inch (REF)
THICKNESS (At thickest point):
-1: Wreath: 0.100 inch + 0.010 inch
Device: 0.120 inch + 0.010 inch
Assembled: 0.186 inch $\pm$ 0.010 inch
-2: Wreath: 0.085 inch + 0.010 inch
Device: 0.090 inch + 0.010 inch
Assembled: 0.140 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be a prong and wing type clutch.

2. Three prongs shall be centered on the wreath. Two prongs shall be located on a horizontal line 7/16 inch (+0 -1/16 inch) from the top edge for -1 and 11/32 inch (+0 -11/32 inch) for -2. One prong shall be placed on the vertical center line and centered on the bottom of the wreath for both -1, -2.

3. The device shall be superimposed and secured to the wreath by four rivets or soft solder. When rivets are used, they shall be located at the ends of the diagonal swords and shall be soldered to or be an integral part of the sword.

PIERCING: Piercing requirements are different for the -1 and -2 device and will be as indicated on the above images for the regular size and miniature devices.

EPOXY:
1. Epoxy resin shall be applied to the badge as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard enamel is used, then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

2. The epoxy on the shield will be stoned. The epoxy on the letters will be floating.

TIOH HARD ENAMEL CHIPS		
COLOR	NUMBER	LOCATION
Red	#1	2nd stripe to the left, every other one
Blue	#18	Chief of the shield
Blue	#20	Letters
White	#28	1st stripe to the left, every other one.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The design of the -1 and -2 are identical with the exception of the shield on the device. The -1 shield has 13 stripes and the -2 shield has 9 stripes. The stripes of both shields shall be epoxy with alternating white and red; beginning with white and ending with white.

3. The following finish is permitted for commercial sale or when specified in the procurement document:

WREATH: Nickel Plated, Mirror like Polish and shall match TIOH Metal Finish Chip Number 16.
DEVICE: Epoxy resin, 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

4. The specification slash sheet for the lapel button is MIL-DTL-11484/71.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision toidentify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2021-463)

NOTE: The activities listed above were interested in this document as of the date of this document.Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.