NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/145C(IH)
14 March 2024
SUPERSEDING
MIL-DTL-3628/145B(IH)
13 May 2019

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, DELIVERY SERVICES EMPLOYEES, U.S. POSTAL SERVICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

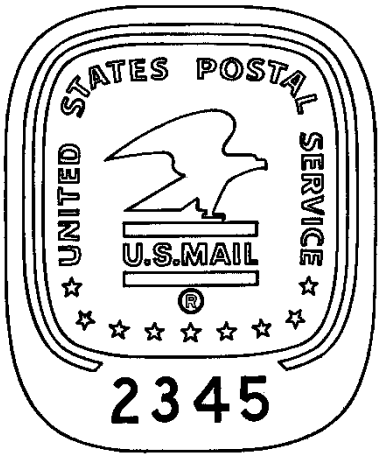

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Plated 65/35 (UNS Alloy No C-752)

FINISH: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match The Institute of Heraldry Metal Finish Chip Number 14. Recessed areas shall not be relieved.

DIMENSIONS:
HEIGHT (Overall): 2-9/16 inches (REF)
WIDTH (Overall): 2-1/8 inch (REF)
THICKNESS: (Edge): 0.035 inch $\pm$ 0.005 inch
EDGE DEPTH (Overall): 0.140 inch (REF)
WEIGHT (Assembled): 1.37 ounce + 0.005 ounce

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:48Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. Attaching device shall be a pin with top opening catch.

2. The joint shall be located on the vertical center line 1/8 inch ± 1/32 inch below the top of the badge.

3. The attaching device shall be soft soldered or secured to the badge by two hollow rivets 9/64 inch ± 1/64 inch in length and 0.085 inch ± 0.002 inch in diameter. The rivets shall be hard soldered on the vertical center line of the badge and be a minimum of 1-1/8 inch ± 1/64 inch apart.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the design and meet the weight requirement. If the attaching device is to be soft soldered to the badge, the forcer shall contain three platforms for soldering purposes. The platforms shall be located at the top, center and bottom of the area covered by the base of the attaching device.

3. The numbers (2345) are for illustration only. The numbers shall be stamped in as specified in the procurement document. The numbers shall be Gothic condensed, 5/16 inch ± 1/64 inch in height.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-081)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:48Z
Check the source to verify that this is the current version before use.