NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/148
15 November 1996
SUPERSEDING
MIL-B-41809/40B
21 September 1994

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, REFUGE OFFICER, U.S. FISH AND WILDLIFE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

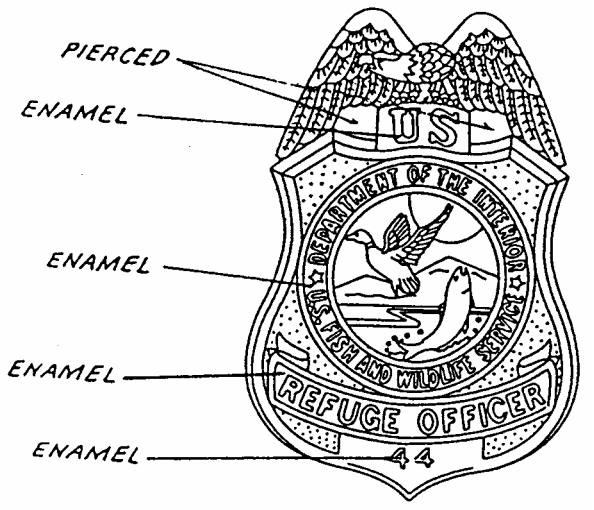

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT (Overall): 2-5/8 inches (6.67 cm) (REF)
WIDTH (Overall): 1-13/16 inches (4.60 cm) (REF)
THICKNESS (At Thickest Point): 0.085 inch ± 0.010 inch (0.215 cm ± 0.025 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:49Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18 (Backgrounds & “US”)
Black	26 (Numbers)

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. Attaching device shall be of the following styles as specified in the procurement document.

a. Money clip: The clip shall be 1-1/2 inch ± 1/64 inch (3.81 cm ± 0.04 cm) long and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) wide with the top of the clip located at the top edge of the shield and hard soldered on the vertical center line of the reverse side of the badge.

b. Pin and catch type: The pin shall be 1-3/4 inch ± 1/32 inch (4.45 cm ± 0.08 cm) long with a heavy duty top opening catch. The joint shall be located on the vertical center line 1/2 inch ± 1/64 inch (1.27 cm ± 0.04 cm) down from the top of the badge.

6. The badge shall be numbered consecutively with the numbers specified in the procurement document. Numbers shall be 1/8 inch ± 1/64 inch (0.32 cm ± 0.04 cm) high, equally spaced, and aligned in an arc within the area not embossed provided on the lower obverse side. Numbers shall be filled with chip number 26 black enamel.

7. A full forcer shall be used to bring up the details of the design.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0866)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:49Z
Check the source to verify that this is the current version before use.