NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/148C(IH)
14 March 2024
SUPERSEDING
MIL-DTL-3628/148B(IH)
13 May 2019

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, REFUGE OFFICER, U.S. FISH AND WILDLIFE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

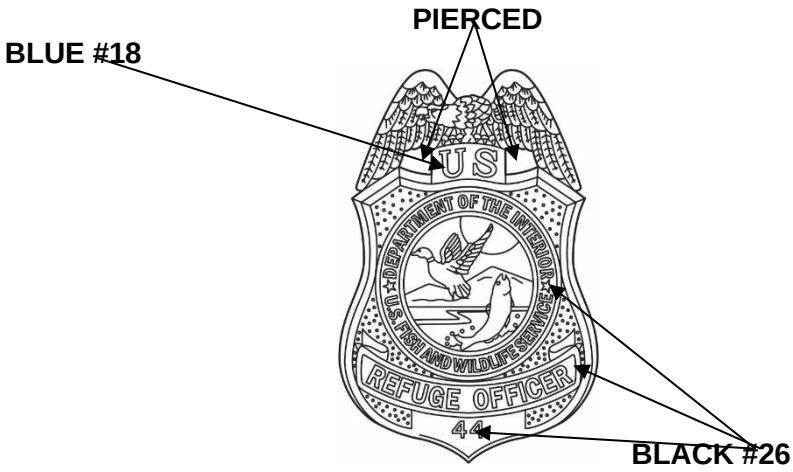

MATERIAL: Red Brass 85/15 (UNS Alloy C-230)

FINISH: Epoxy resin (Stoning epoxy) 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT (Overall): 2-5/8 inches (REF)
WIDTH (Overall): 1-3/16 inches (REF)
THICKNESS: (At thickest point)): 0.085 inch $\pm$ 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:49Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard enamel is used then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#18 (Backgrounds) &(US)
Black	#26 (Numbers)

ATTACHING DEVICE:

1. Attaching device shall be of the following styles as specified in the procurement document.

a. Money clip: The clip shall be 1-1/2 inch ± 1/64 inch long and 5/8 inch ± 1/64 inch wide with the top of the clip located at the top edge of the shield and hard soldered on the vertical center line of the reverse side of the badge.

b. Pin and catch type: The pin shall be 1-3/4 inch ± 1/32 inch long with a heavy duty top opening catch. The joint shall be located on the vertical center line 1/2 inch ± 1/64 inch down from the top of the badge.

2. The badge shall be numbered consecutively with the numbers specified in the procurement document. Numbers shall be 1/8 inch ± 1/64 inch high, equally spaced, and aligned in an arc within the area not embossed provided on the lower obverse side and filled with chip number 26 black epoxy.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the details of the design.

3. Piercing shall be as indicated.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-082)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:49Z
Check the source to verify that this is the current version before use.