INCH-POUND

MIL-DTL-3628/153C
28 August 2006
SUPERSEDING
MIL-DTL-3628/153B
1 April 1999

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, RECRUITER, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.

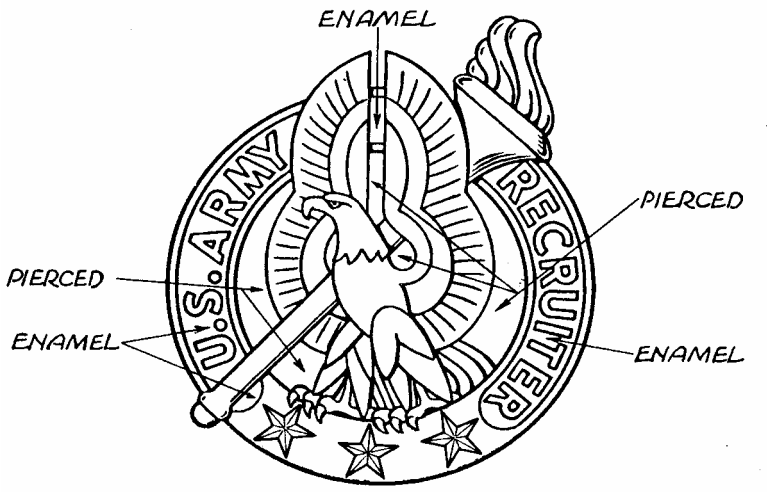

DASH NO.

-1: Badge - Silver With Mounted Stars
-2: Badge - Gold With Mounted Stars
-3: Star – Silver
-4: Star – Gold
-5 – Star White Synthetic Cubic Zircon (See Note 10)
-6: Badge – Silver with Mounted Stars, Subdued (See Note 13).
-7: Badge – Gold with Mounted Stars, Subdued (See Note 14).
-8: Star – Silver, Subdued (See Note 13).
-9: Star – Gold, Subdued (See Note 14).
-10: Star – White Synthetic Cubic Zircon, Subdued (See Note 15).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.

MATERIAL: Red Brass

FINISH:

-1: Soft Baked Enameled, Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14. Face and side lacquered.
-2: Soft Baked Enameled, Gold Plated, Mirror-like Polished Finish and shall match TIOH Metal Finish Chip Number 6.
-3: Nickel Plated, Silver Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 12.
-4, -5: Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.
-6: Dull, Flat Black Enamel Finish FED-STD-595 Chip Number 37038.
-7: Dull, Flat Brown Enamel Finish FED-STD-595 Chip Number 20095.
-8: Dull, Flat Black Enamel Finish FED-STD-595 Chip Number 37038.
-9: Dull, Flat Brown Enamel Finish FED-STD-595 Chip Number 20095.
-10: Dull, Flat Smoke Gray Enamel Finish PMS 425.

DIMENSIONS:

DASH NO. -1, -2, -6, -7
HEIGHT: 2-1/8 inch (REF)
WIDTH: 1-3/4 inch (REF)
THICKNESS (minimum): 0.030 inch (See Note 11)
DASH NO. -3, -4, -5, -8, -9, -10
DIAMETER (circumscribed): 3/16 inch (REF)
THICKNESS (at thickest point): 0.060 inch ± 0.005 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the design.

3. Green enamel shall conform to TIOH Color Chip No. 12.

4. Epoxy resin (stoning epoxy) may be used in lieu of soft baked enamel at the option of the manufacturer. When epoxy resin is used, the epoxy shall not be stoned.

5. Pierced areas shall be as indicated.

6. The attaching device shall be prong and clutch type. Three prongs shall be located on the center of the ring area. Prongs shall be 120 degrees apart with the top prong centered on a vertical line dissecting the top of the ring.

7. A 0.050 inch $\pm$ 0.005 inch diameter hole shall be drilled in the centers of the recessed star outline of the badge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.

8. Attaching device for the stars shall be a staple type prong. The prong shall be 1/8 inch + 1/16 inch - 0 inch long and shall be formed from 0.010 inch ± 0.002 inch thick flat brass or nickel silver wire 0.040 inch ± 0.002 inch wide. The prong shall be centered on and hard soldered or fused to the reverse of the star. The contact area where the prong is soldered or fused to the star shall not exceed 0.040 inch.

9. Stars shall be mounted on the badge with the prongs pushed through the holes so the stars are positioned in the recessed star outline on the badge and the prongs bent over to ensure a tight snug fit.

10. The Dash No. -5 star shall have a three point full cut white synthetic cubic zircon set with a four bead setting. The setting shall be accomplished by filing the star point flat and drilling a hole in the center of the flat area of sufficient size and depth to accept the stone.

11. Dash No: -2, -4, and -5 may be manufactured using 22 karat gold plate with nickel underplating for commercial use only.

12. Dash No: -1 and -3 may be manufactured with a nickel plated, mirror-like polished finish which shall match TIOH Metal Finish Chip Number 16 for commercial use only.

13. The Dull, Flat Black Enamel for -6 and -8 shall match FED-STD-595, Chip Number 37038.

14. The Dull, Flat Brown Enamel for -7 and -9 shall match FED-STD-595, Chip Number 20095.

15 The Dull, Flat Smoke Gray Enamel for -10 shall match PMS 425.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-2006-075)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.