NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/153F(IH)
20 February 2026
SUPERSEDING
MIL-DTL-3628/153E(IH)
5 October 2020

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, RECRUITER, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.

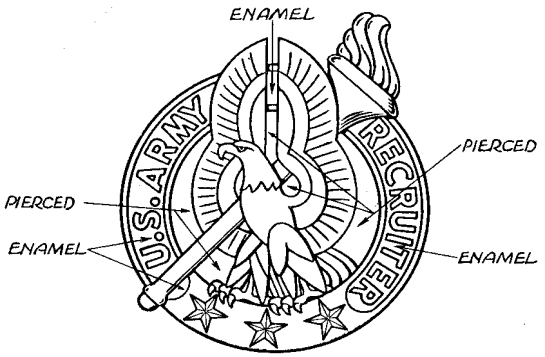

DASH NO.

-1: Badge - Silver With Mounted Stars	-6: Badge – Silver with Mounted Stars, Subdued (See Note 9)
-2: Badge - Gold With Mounted Stars	-7: Badge – Gold with Mounted Stars, Subdued (See Note 10)
-3: Star – Silver	-8: Star – Silver, Subdued (See Note 9)
-4: Star – Gold	-9: Star – Gold, Subdued (See Note 10).
-5: Star White Synthetic Cubic Zircon (See Note 5)	-10: Star – White Synthetic Cubic Zircon, Subdued (See Note 5)

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:

-1: Epoxy resin, Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-2: Epoxy resin, 24K Gold Plated, Mirror-like Polished Finish and shall match TIOH Metal Finish Chip Number 6.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.

-3: Nickel Plated, Silver Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 12.

-4, -5: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

-6: Dull Flat Black Enamel Finish and shall Match TIOH Metal Finish Chip Number 21.

-7: Dull Flat Brown Enamel Finish and shall Match TIOH Metal Finish Chip Number 22.

-8: Dull Flat Black Enamel Finish and shall Match TIOH Metal Finish Chip Number 21.

-9: Dull Flat Brown Enamel Finish and shall Match TIOH Metal Finish Chip Number 22.

-10: Dull, Flat Smoke Gray Enamel Finish PMS 425.

DIMENSIONS:
-1, -2, -6, -7
HEIGHT: 2-1/8 inch (REF)
WIDTH: 1-3/4 inch (REF)
THICKNESS (minimum): 0.030 inch (See Note 7)
-3, -4, -5, -8, -9, -10
DIAMETER (circumscribed): 3/16 inch (REF)
THICKNESS (at thickest point): 0.060 inch ± 0.005 inch

ATTACHING DEVICE:
1. The attaching device shall be prong and wing clutch type.

2. Three prongs shall be located on the center of the ring area. Prongs shall be 120 degrees apart with the top prong centered on a vertical line dissecting the top of the ring.

3. A 0.050 inch ± 0.005 inch diameter hole shall be drilled in the centers of the recessed star outline of the badge.

4. Attaching device for the stars shall be a staple type prong. The prong shall be 1/8 inch + 1/16 inch - 0 inch long and shall be formed from 0.010 inch ± 0.002 inch thick flat brass or nickel silver wire 0.040 inch ± 0.002 inch wide. The prong shall be centered on and hard soldered or fused to the reverse of the star. The contact area where the prong is soldered or fused to the star shall not exceed 0.040 inch.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#12

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the design.

3. Pierced areas shall be as indicated.

4. Stars shall be mounted on the badge with the prongs pushed through the holes so the stars are positioned in the recessed star outline on the badge and the prongs bent over to ensure a tight snug fit.

5. For -5 star shall have a three point full cut white synthetic cubic zircon set with a four bead setting. The setting shall be accomplished by filing the star point flat and drilling a hole in the center of the flat area of sufficient size and depth to accept the stone

6. For -2, -4, and -5 may be manufactured using 22 karat gold plate with nickel underplating for commercial use only.

7. For -1 and -3 Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

8. Dull Flat Black Enamel Finish and shall Match TIOH Metal Finish Chip Number 21.

9. Dull Flat Brown Enamel Finish and shall Match TIOH Metal Finish Chip Number 22.

10. The Dull, Flat Smoke Gray Enamel for -10 shall match PMS 425.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-122)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.