INCH-POUND

MIL-DTL-3628/154A
29 March 2006
SUPERSEDING
MIL-DTL-3628/154
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, DRILL SERGEANT, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

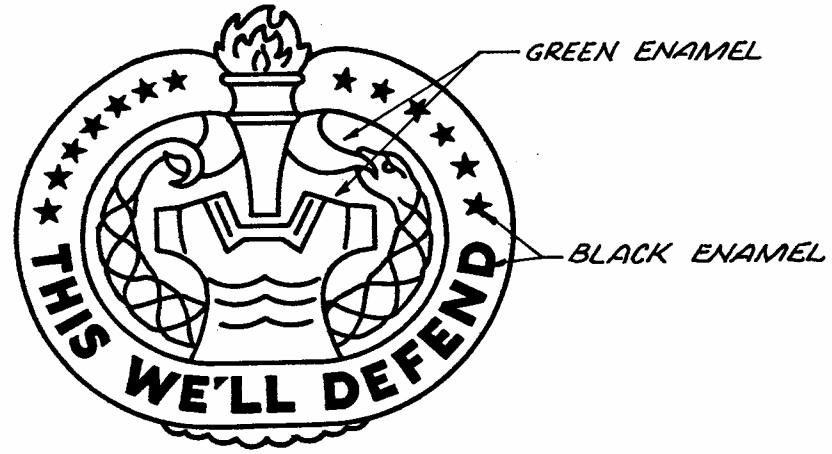

DASH NO.
-1 Regular Size
-2 Regular Size, Subdued

MATERIAL: Red Brass

DIMENSIONS:
HEIGHT (Overall):
-1, -2: 1-51/64 inches (4.56 cm) (REF)

WIDTH (Overall):
-1, -2: 2 inches (5.08 cm) (REF)

THICKNESS (At thickest point):
-1, -2: 0.110 inch $\pm$ 0.005 inch (0.279 cm $\pm$ 0.012 cm)

FINISH:
-1 Soft Baked Enameled, Gold Plated. Scroll shall have a Mirror-Like Polish and shall match TIOH Metal Finish Chip Number 6. Interior, Ends of Scroll and Modeled Area shall be Matte Finish and shall match TIOH Metal Finish Chip Number 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.

-2: Dull, Flat Black Enamel Finish Chip Number 37038

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the applicable TIOH color chips listed below or the standard sample:

COLOR	CHIP NO.
Green	12
Black	26

3. Epoxy resin (stoning epoxy) may be used in lieu of soft baked enamel at the option of the manufacturer. The epoxy shall not be stoned.

4. The attaching device shall be prong and clutch type. One prong shall be located on the vertical center line 1/4 inch $\pm$ 1/32 inch (0.64 cm $\pm$ 0.08 cm) below the highest tip of the flame. One prong shall be located on a horizontal line 7/16 inch $\pm$ 1/32 inch (1.11 cm $\pm$ 0.08 cm) from each outside edge of the badge.

5. The dull flat black enamel for Dash -2 shall match FED-STD-595, Chip No. 37038.

6. As an alternate method of manufacturing for commercial sale only, 22 karat gold plate with nickel underplating may be used. Scroll shall have a mirror-like polish and shall match TIOH Metal Finish Chip Number 9. Interior, ends of scroll and modeled area shall be matte finish and shall match TIOH Metal Finish Chip Number 10.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-2006-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.