INCH-POUND


MIL-DTL-3628/154C
18 April 2019
SUPERSEDING
MIL-DTL-3628/154B
4 December 2015

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, DRILL SERGEANT, U.S.ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.

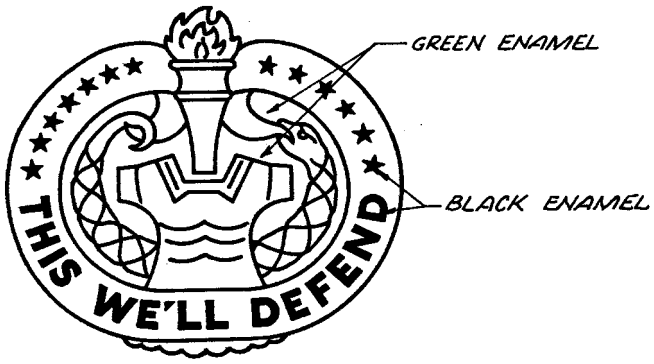

DASH NO.
-1: Regular Size
-2: Regular Size Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1: SCROLL: Epoxy resin (Stoning epoxy), 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
INTERIOR, END OF SCROLL AND MODELED AREA: 24K Gold Plated, Matte Finish and shall match Metal Finish Chip Number 7.

-2: Dull Flat Black Enamel Finish and shall Match TIOH Metal Finish Chip Number 21.

DIMENSIONS:
HEIGHT (Overall): 1-51/64 inches (REF)
WIDTH (Overall): 2 inches (REF)
THICKNESS (At thickest point): 0.110 inch $\pm$ 0.005 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. The attaching device shall be prong and wing type clutch.

2. One prong shall be located on the vertical center line 1/4 inch ± 1/32 inch below the highest tip of the flame. One prong shall be located on a horizontal line 7/16 inch ± 1/32 inch from each outside edge of the badge.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. As an alternate method of manufacturing for commercial sale only, 22 karat gold plate with nickel underplating may be used. Scroll shall have a mirror-like polish and shall match TIOH Metal Finish Chip Number 9. Interior, ends of scroll and modeled area shall be matte finish and shall match TIOH Metal Finish Chip Number 10.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#12
Black	#26

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2019-160)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:51Z
Check the source to verify that this is the current version before use.