MIL-C-43476A

22 June 1972

SUPERSEDING
MIL-C-43476
6 January 1967

MILITARY SPECIFICATION

CHAPLAIN'S KIT, JEWISH FAITH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size of Jewish Chaplain's Kit.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
JJ-W-155	-	Webbing, Textile (Cotton, Elastic).
QQ-A-250/2	-	Aluminum Alloy 3003, Plate and Sheet.
QQ-C-320	-	Chromium Plating (Electrodeposited).
PPP-B-636	-	Boxes, Shipping, Fiberboard.

MILITARY

MIL-C-5541	-	Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
MIL-P-15328	-	Primer Wash Pretreatment Blue (Formula No. 117B for Metals).
MIL-C-40638	-	Candles, Ecclesiastical (and Taper, Candlelighter).
MIL-K-43387	-	Kiddush Cup.
MIL-P-43406	-	Pointer, Torah.

FSC 9925

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods.
FED-STD-751 - Stitches, Seams and Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWINGS

ARMY NATICK LABORATORIES

14-1-40 - Candlestick
14-1-50 - Chaplain's Kit, Jewish Faith; Assembly Complete.
14-1-51 - Chaplain's Kit, Jewish Faith; Cover, Bema and Partus Assembly.
14-1-52 - Chaplain's Kit, Jewish Faith; Cover, Ark Assembly.
14-1-53 - Case Assembly.
14-1-54 - Lid Assembly.
14-1-55 - Altar and Locking Arm Assemblies.
14-1-56 - Bottom, Nest and Spacer Details.
14-1-57 - Lid Details.
14-1-58 - Miscellaneous Details.

(Miniature copies of Drawings 14-1-50, 14-1-51, 14-1-53, identified as figures 1, 2, and 3 respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

of Cable No. 65008 (Silver), matching the standard shade samples (see 6.3). The heading rows shall be Cable No. 65010 (Ultra-Marine Blue), matching the standard shade sample (see 6.3). The dyed fringe shall show good fastness to wet drycleaning and light when tested as specified in 4.3.1.1.

3.2.6 Thread, cotton.- The cotton thread shall be type IC2, ticket No. A of V-T-276. The color of the thread shall be a good match to the color of the materials to be sewed.

* 3.2.7 Webbing.- Elastic webbing shall be black, 1/2 inch wide, conforming to type 1, class 1 of JJ-W-155.

3.3 Components.- The components of the kit shall conform to the quantities referenced in table I.

TABLE I.- Components

Nomenclature	Quantity per kit	Reference paragraph
Ark hangings (partus)	2	3.4.1
Bottle, plastic, 8 oz.	1	3.4.2
Candle	2	3.4.3
Candlesticks	2	3.4.4
Case, carrying	1	3.4.5
Cover, ark	1	3.4.6
Cover, bema	1	3.4.7
Kiddush cup	1	3.4.8
Torah pointer	1	3.4.9
Torah (with cover)	1	3.4.10

3.4 Details of components.- Details of components shall be as specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:30Z
Check the source to verify that this is the current version before use.

* 3.4.1 Cloth components.- The ark hangings (partus), the tops, frontals, and side pieces of the ark and bema covers shall be made of the velour specified in 3.2.3 and lined with the sateen specified in 3.2.4. The bottom of the ark hangings, the frontals of the ark and bema covers, and the side pieces of the ark cover shall be edged with the fringe specified in 3.2.5. The ark hangings and bema cover shall conform to Drawing 14-1-51. The tablet and Hebraic characters on the ark cover shall be embroidered on the base fabric and not applied by adhesive. The ark cover shall conform to Drawing 14-1-52.

* 3.4.2 Bottle, plastic.- The plastic bottle shall be a commercial "Boston Round" bottle. The bottle shall have a nominal capacity of eight ounces and shall be provided with a screw cap.

3.4.3 Candle.- The candle shall conform to type I, size 3 of MIL-C-40638.

3.4.4 Candlestick.- The candlesticks shall be fabricated of the brass specified in 3.2.1 and shall conform to Drawing 14-1-40.

3.4.5 Carrying case.- The carrying case shall conform to Drawing 14-1-53. The case shall be fabricated from the aluminum specified in 3.2.2 and finished as specified in 3.6.1.

* 3.4.6 Kiddush cup.- The kiddush cup shall conform to MIL-K-43387.

* 3.4.7 Torah pointer.- The torah pointer shall conform to MIL-P-43406.

* 3.4.8 Torah.- The torah shall be commercially available reproduction of the Torah and shall conform to Drawing 14-1-50. The Torah shall fit the case.

3.5 Stitching.- Stitching shall conform to type 301 of FED-STD-751, 10 to 14 stitches per inch. Thread breaks in stitching shall be overstitched not less than 1-inch at each break. Stitching shall be back tacked not less than 1/2 inch at the ends, except where the ends of stitching are caught in other seams or stitching. Thread tension shall be maintained so that there shall be no loose or tight stitching. All threads ends shall be trimmed. Seam allowances shall be maintained with seams properly sewed so that no runoffs, twists, pleats, puckers, or open seams shall result.

3.6 Finish.-

3.6.1 Case.- The interior and exterior of all aluminum parts of the case shall be prepared for finishing in accordance with MIL-C-5541. The prepared parts and hinges shall be pretreated in accordance with MIL-P-15328 and coated with a commercial black wrinkle enamel. Wood parts shall be finished by the flocking process and the color shall be blue. Hardware shall be finished in a commercial black color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

3.6.2 Candlestick plating.- The candlestick, specified in 3.4.4, shall be chromium plated in accordance with class 1, type I, of QQ-C-320.

3.7 Workmanship.- Metallic and plastic components shall be free from sharp edges, burrs, and slivers. The plating and finishes, where required, shall be free from areas of poor or no coverage. Fabric components shall be clean, and free of wrinkles, loose threads, and raw edges.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- The first article shall be examined for defects in table II and specified dimensions. The presence of any visual defect, dimensions not within specified requirements or failure to pass the test shall be cause for rejection of the first article.

* 4.2.1 Exception to first article.- First article inspection may be waived on reprocurement contracts where the supplier has shown capability to manufacture the item on previous contracts. The supplier shall furnish a certified statement to the contracting officer to the effect that he has not changed materials, components, or manufacturing processes. Where certificates are submitted the Government reserves the right to check test such items to determine the validity of the certification.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.1.1 Testing of components.- Testing shall be performed on the cloth materials listed in table II for the characteristics shown. All requirements are applicable to an individual sample unit. The sample unit shall be 1-1/2

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:30Z
Check the source to verify that this is the currentversion before use.

yards full width. The inspection level shall be S-1 and the acceptable quality level (AQL) shall be 6.5, expressed in terms of defects per hundred units. The inspection lot shall consist of all finished material offered for inspection at one time.

TABLE II.- Material test

Material	Characteristics	Test Method FED-STD-191
Cotton velour (3.2.3 and cotton sateen 3.2.4)	Material identification	1200 1/
	Weight	5040
	Texture (threads per inch, warp and filling)	5050
	Color fastness to:	
	Wet cleaning of textile materials (associated with drycleaning)	5622
	Light	5660 2/
Rayon fringe (3.2.5)	Material inspection	1500 1/
	Weave	visual
	Weight	5041
	Fringe strands	visual
	Color fastness to:	
	Wet cleaning of textile materials (associated with drycleaning)	5622
	Light	5660 2/

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

2/ The time of exposure shall be 40 standard fading hours.

4.3.2 Process examination.- Prior to application of the black wrinkle enamel, aluminum components shall be examined to determine compliance with finish preparation requirements in 3.6.1. Whenever noncompliance is noted, correction shall be made to affected items and process.

4.3.3 End product inspection.- A lot shall consist of all kits offered for inspection at one time. The sample unit for this inspection shall be one complete kit.

* 4.3.3.1 Visual examination.- Examination shall be made of the kits for defects set forth in table III. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

TABLE III.- Visual examination of defects

Examine	Defect	Classification Major	Classification Minor
Cloth components			
Fabric	Holes, cuts, tears, any smash, weak place, broken or missing yarns, multiple floats or open place.	X	
	Shade bar	X	
Seams and stitching			
Open seams	Up to 1/4 inch.		X
	More than 1/4 inch.	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double-stitched seams, a seam shall be classified, as open when either are open.		
Raw edge	Any raw edge not permitted by drawing.		X
	NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		
Seam and stitch type	Wrong seam or stitch type (where specified).	X	
Stitch tension	Loose, resulting in a loosely exposed needle or bobbin thread.		X
	Tight, resulting in excessive puckering.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

TABLE III.- Visual examination of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Cloth components (cont'd)			
Stitches per inch	One stitch less than minimum specified.		X
	Two or more stitches less than minimum specified.	X	
	One stitch more than maximum specified.		X
	Two or more stitches in excess of maximum specified.	X	
	NOTE: To be scored when the condition exists on major portion of seam or stitching.		
Stitching ends	Back tacked less than 1/2 inch (except where ends are held down by other seams or stitching).		X
Thread breaks	Overstitched less than 1-inch.		X
	Broken ends of stitching not caught in overstitching.		X
	NOTE: Thread breaks not overstitched shall be classified as an open seam.		
Workmanship	Any required operation omitted (unless otherwise classified herein).	X	
	Mends or darns.	X	
	Thread not good match with material.		X
	Needle chews.	X	
	Seams or hems twisted or pleated.	X	
Cleanness	Any spot or stains; thread ends not trimmed throughout.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

TABLE III.- Visual examination of defects (cont'd)

Examine	Defect	Classification Major	Minor
Workmanship (cont'd)			
Assembly	Component missing or damaged.	X	
	Not as specified.		X
Embroidery	Not as specified.	X	
	Applied with adhesive (not embroidered on basic fabric)	X	
Torah	Not provided with cloth cover.	X	
	Does not fit within compartment provided.	X	
Metal component and case			
Finish	Not finish specified.	X	
	Not uniform or is dirty, stained, discolored, scratched, abraded, peeling, or any foreign matter imbedded in plating or finish.	X	
Construction and workmanship	Any malformation.	X	
	Rough or sharp edges or burrs.	X	
	Loose parts.		X
	Soldering incomplete or missing.	X	
	Solder not flush on outside surfaces.	X	
	Latch and hinges do not operate freely.		X
Nest	Not as specified.	X	

4.3.3.2 Dimensional examination.- Examination shall be made of the kit for defects in dimensions. Any dimension not within specification requirements shall be classified as a defect. The inspection level shall be S-3 with an acceptable quality level (AQL) of 4.0 defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be scored as specified in table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE IV.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps; strapping or sealing, improper or missing; closures improperly affixed; components improperly secured, inadequate stapling; bulging or distortion of containers.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A.

5.1.1 Level A.- The pair of candles, candlesticks, kiddush cup, and pointer shall be placed individually in minimum 0.001-inch thick polyethylene bags. The candlesticks, kiddish cup and plastic bottle shall be placed in the appropriate compartment and secured by means provided. The torah shall be placed in cover provided and secured in the lid by means provided. Cloth items shall be neatly folded, with the pair of candles and the pointer placed inside, and placed in the empty prayer book compartment in the case lid. Void spaces within this compartment, and in the Torah compartment shall be filled with cushioning material or fiberboard inserts in such a manner as to prevent movement or damage while in transit. The case shall be closed.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.- Each kit, packaged as specified in 5.1, shall be packed flat in a snug-fitting corrugated fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Corrugated fiberboard pads having a minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

bursting strength of 175 pounds per square inch shall be provided to fill voids caused by projections on the carrying case. Closure, waterproofing by means of tape, and reinforcing with strapping or tape banding shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Unless otherwise specified (see 5.2.2.1), each kit, packaged as specified in 5.1, shall be packed flat in a snug-fitting corrugated fiberboard shipping container conforming to style RSC, type CF, class domestic of PPP-B-636. Corrugated fiberboard pads of the same material as the container shall be provided to fill voids caused by projections on the carrying case. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

* 5.2.3 Level C.- Kits, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129. Special handling marking requirements applicable to fragile items, arrows, and the words "THIS SIDE UP" shall apply.

6. NOTES

6.1 Intended use.- The Chaplain's kit covered by this specification is intended for use in conducting Jewish religious services under noncombat field conditions.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When first article is waived (see 3.1, 4.2, and 6.4).
(c) Selection of applicable level of packing (see 5.2).
(d) When weather resistant grade fiberboard is required for level B pack (see 5.2.2.1).

* 6.3 For access to the standard shade samples for cotton velour, cotton sateen and viscose rayon fringe, address the procuring office issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

* 6.4 First article.- The first article shall be inspected and approved under the provisions of ASPR 7-104.55 pertaining to Government inspections. The first article should be a preproduction sample. The first article should consist of a complete unit. The contracting officer should make arrangements for inspection and approval of the first article with the Construction, Materiel and Supplies Advisory Group, Armed Forces Chaplains Board, Washington, DC 20301 and the U. S. Army Natick Laboratories (GL), Natick MA 01760.

6.5 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - PE
Air Force - 28

Preparing activity:


Army - GL

Project No. 9925-0192


Review activities:

Armed Forces Chaplains Board
DSA-GS


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

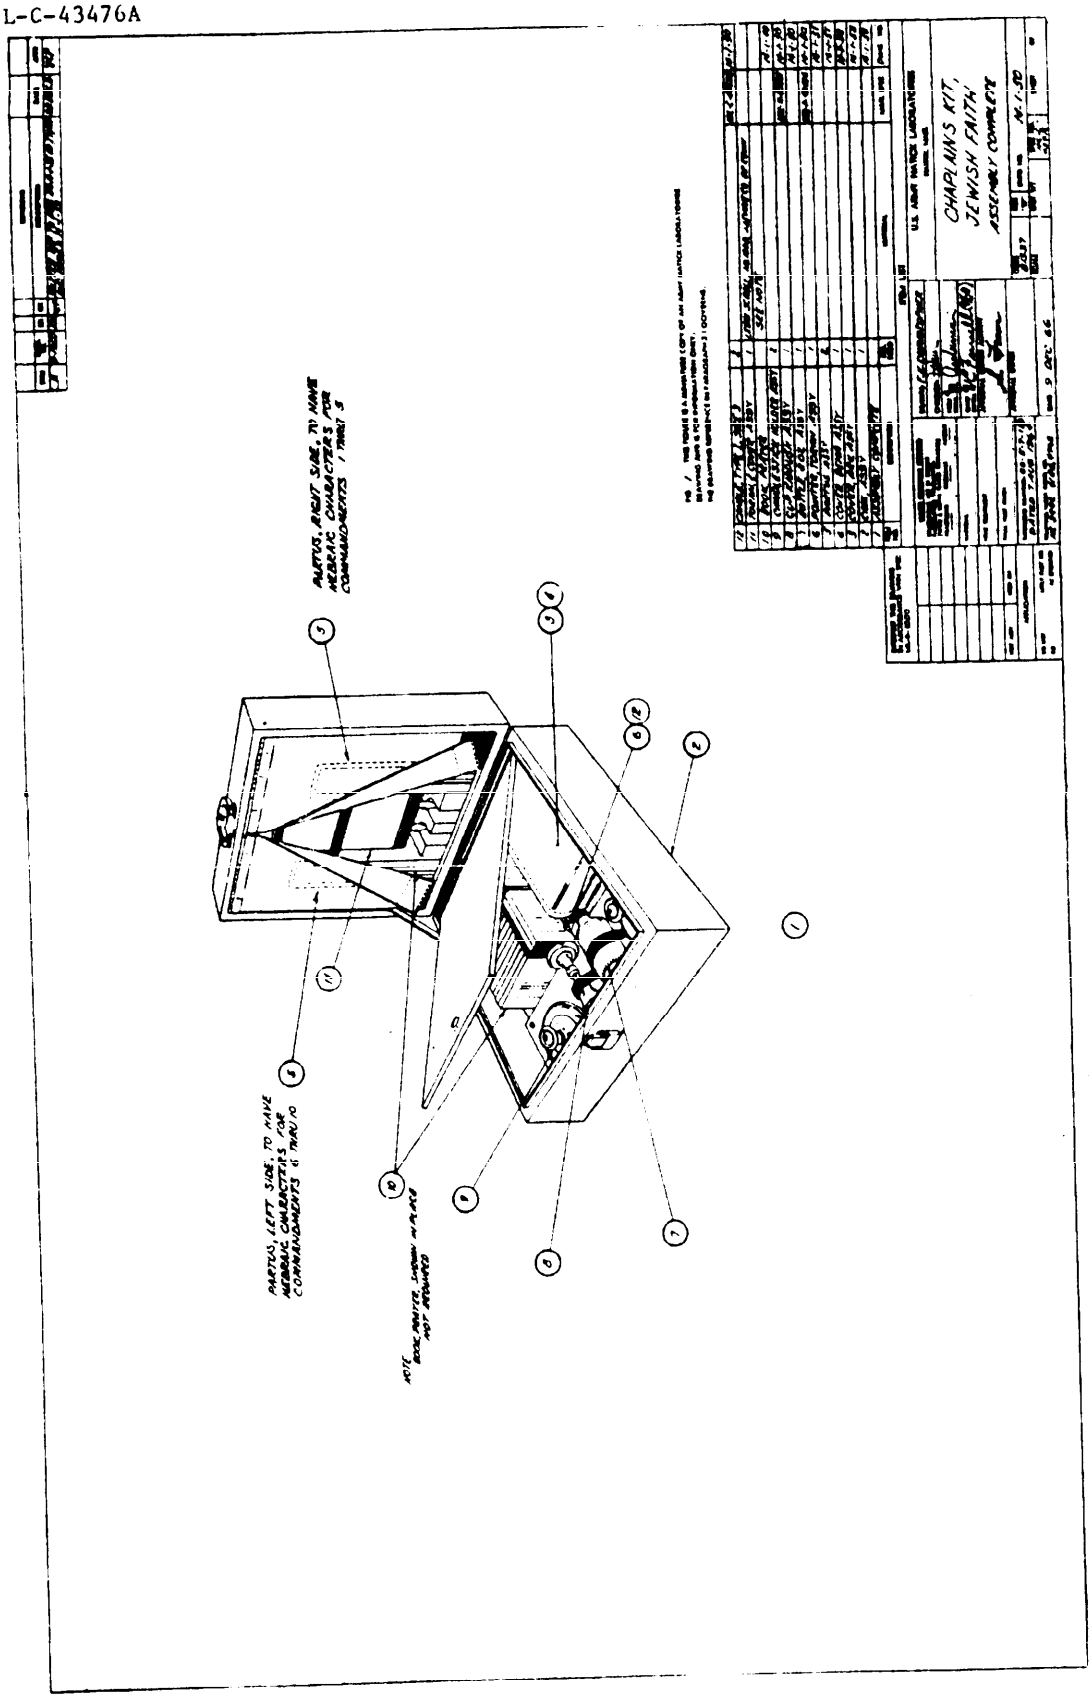

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

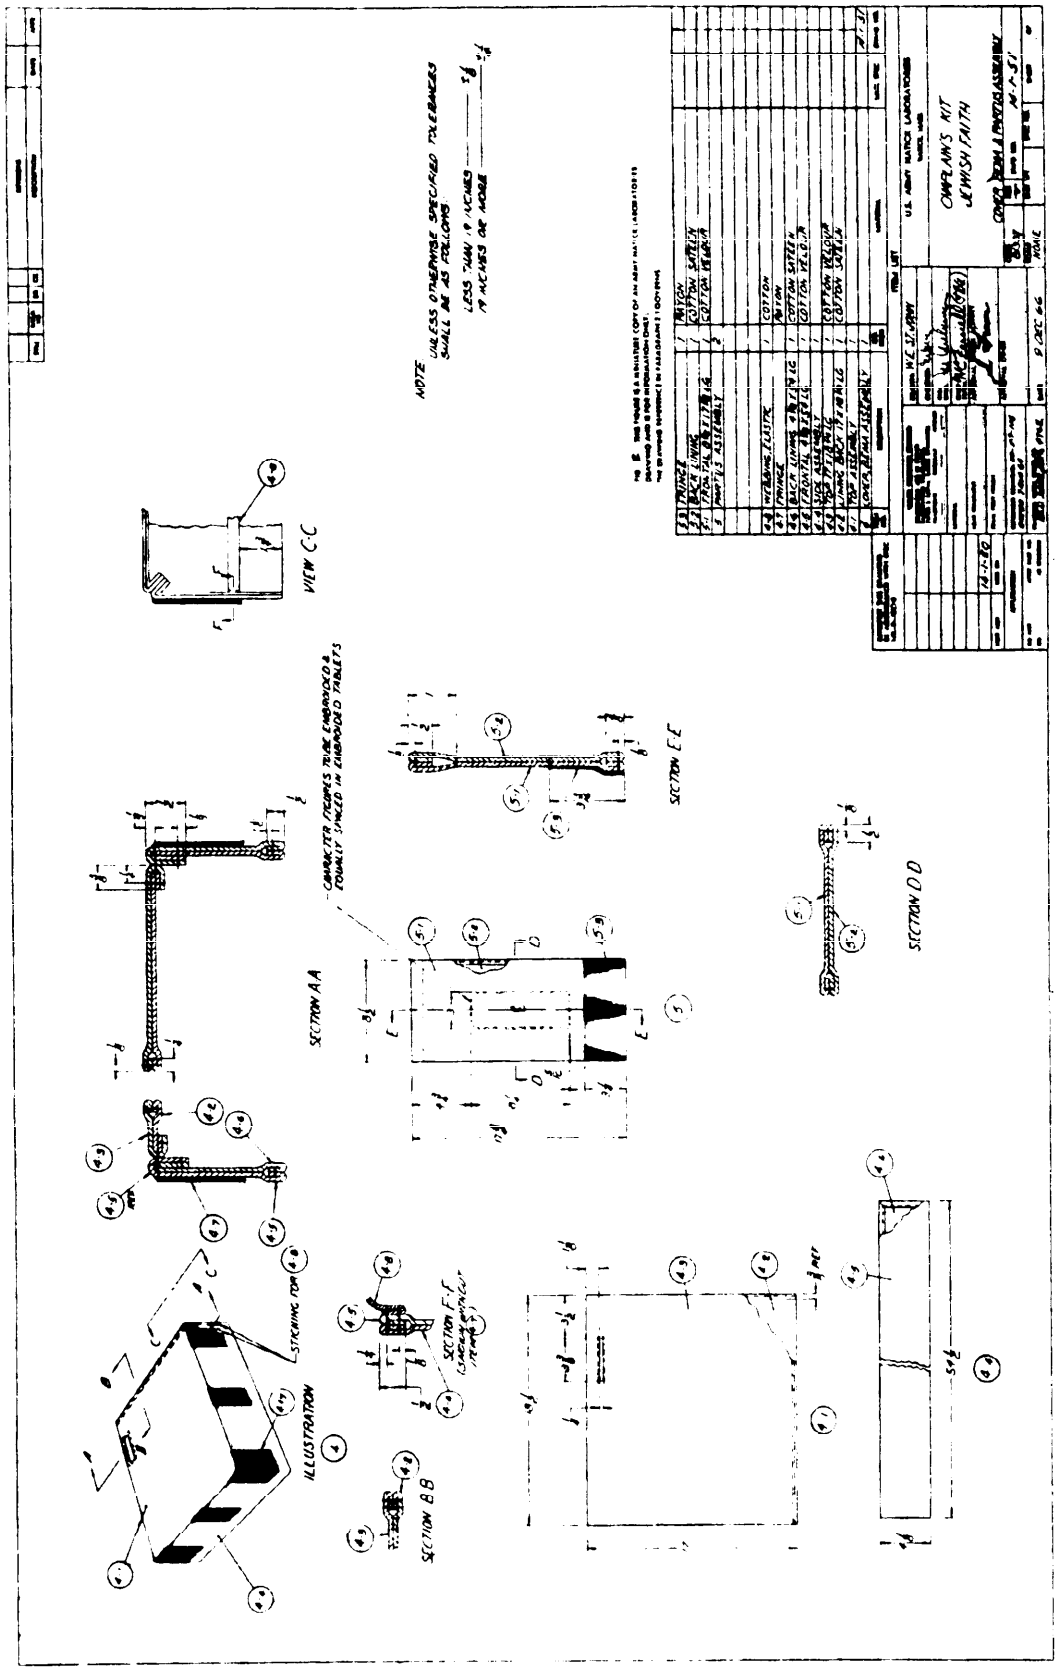

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

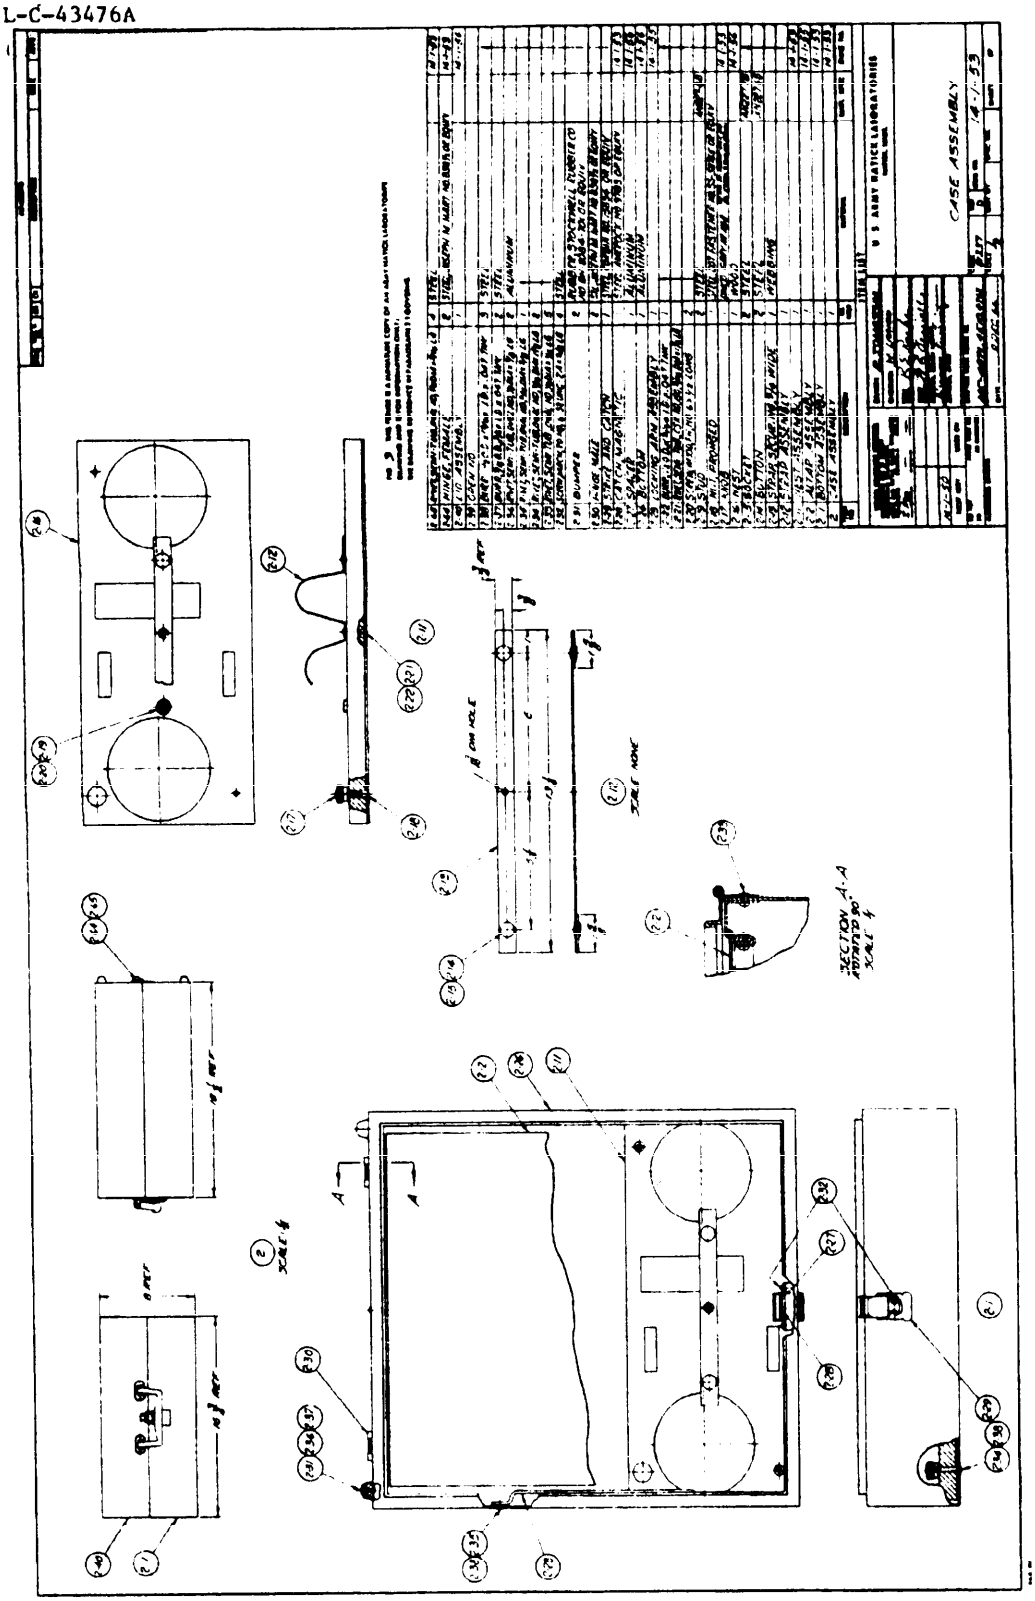

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BOS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Chaplain's Kit, Jewish Faith MIL-C-43476A

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T21:30Z
Check the source to verify that this is the current version before use.