MIL-P-43475A

25 August 1969
SUPERSEDING
MIL-P-43475
9 January 1967

MILITARY SPECIFICATION

PRIE-DIEU

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of prie-dieu.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-V-119	-	Varnish, Spar, Phenolic-Resin
MMM-A-125	-	Adhesive, Casin Type, Water and Mold Resistant
MMM-A-188	-	Adhesive, Urea-Resin Type (Liquid and Powder)
PPP-B-636	-	Box, Fiberboard
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-V-1174	-	Varnish, Spar, Water Resisting (Formula No. 80)
MIL-R-5001	-	Rubber, Latex Foam Sponge

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

FSC 9925

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY NATICK LABORATORIES

14-1-44 - Prie-Dieu; Assembly Complete
14-1-45 - Prie-Dieu; Footing, Side, Shelf and Kneeler, Details

(Miniature copies of Drawings 14-1-44 and 14-1-45, identified as figures 1 and 2 respectively, are attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for propsal shall apply:

UNITED STATES DEPARTMENT OF COMMERCE

U.S. Product Standard PS 1-66 Softwood Plywood/Construction and Industrial

(Application for copies should be addressed to the Superintendent of Documents Government Printing Office, Washington, D.C. 20402.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 2016-65 - Standard Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa., 19103.)

NATIONAL CLASSIFICATION BOARD

National Motor Freight Classification

(Application for copies should be addressed to the National Classification Board, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill., 60606.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:30Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced, a preproduction sample shall be submitted to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

* 3.2 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer of prie-dieus, providing the complete item complies with all provisions of this specification.

3.2.1 Wood.- The wood shall be white oak, thoroughly and uniformly dried (without brashness, casehardening or honeycombing) at time of fabrication to a moisture content of not less than 7 percent and not more than 12 percent when tested as specified in 4.3.2.2. The wood shall be clear and free from knots, decay, splits, checks, mineral streak, hole, wane and shake.

* 3.2.2 Plywood.- The plywood shall conform to group 1, exterior type, grade C-C (plugged) or better, of Product Standard PS 1-66.

3.2.3 Latex foam rubber.- Latex foam rubber shall conform to type I, class firm, grade C of MIL-R-5001.

3.2.4 Adhesives.- Adhesives shall be either casin type conforming to type I of MMM-A-125 or urea-resin-type conforming to MMM-A-188, at the option of the supplier.

3.2.5 Varnish.- The varnish shall conform to either MIL-V-1174 or TT-V-119, at the option of the manufacturer.

* 3.3 Construction.- The prie-dieu shall conform to the drawings listed in section 2 and as specified herein. The prie-dieu, except for the kneeler, shall be fabricated of the wood specified in 3.2.1. The kneeler shall be fabricated of the plywood specified in 3.2.2 and shall have a pad made of the rubber specified in 3.2.3, covered with artificial leather (see 3.6). The artificial leather shall be fastened underneath

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:30Z
Check the source to verify that this is the current version before use.

the kneeler with staples. All raw edges of the artificial leather shall be turned under and the staples shall be of sufficient numbers and size and so located as to prevent looseness or shifting of artificial leather. Wood joints shall be glued with the adhesives specified in 3.2.4. Glides shall conform to drawing 14-1-44.

3.4 Finish.-

3.4.1 Preparation for finish.- Prior to finishing, all exposed wood surfaces shall have been thoroughly sanded smooth and shall be free of gouges or tool marks. Glue size may be used before this sanding in order to stiffen wood fibers. Surface shall be thoroughly cleaned immediately before application of finish.

3.4.2 Application of finish.- Pores of the wood surfaces shall be filled with one coat of neutral filler. All wood surfaces shall then be given two coats of sealer. The wood surfaces shall then be given three coats of the varnish specified in 3.2.5. All finished surfaces shall be sanded between coats in accordance with good commercial practice.

3.5 Marking.- The manufacturer shall permanently and legibly affix his name or trademark of such known character easily identified with said manufacturer on the underside of the prie-dieu.

* 3.6 Government furnished property.- The artificial leather will be furnished by the Government (see 6.2). Artificial leather shall conform to either class 4 or 7, treatment (a) 1 and (b) of CCC-A-700. The grain and finish shall be simulated leather matching Color No. 33578 of FED-STD-595.

* 3.7 Workmanship.- Wood joints shall be tight. All sharp corners, burrs, slivers and splinters shall be removed. Artificial leather shall be clean and free of wrinkles and raw edges. Varnished surfaces shall be dry, uniform, sanded smooth, and shall be free of blisters, runs, peels, flakes, cracks, wrinkles, finger marks, scratches or imbedded foreign matter.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:30Z
Check the source to verify that this is the current version before use.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects in table I and specified dimensions.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2 Intermediate testing and examination.-

4.3.2.1 Process inspection.- Examination shall be made to establish that no deviation is made from the gluing requirement in 3.3, sanding and cleaning requirements specified in 3.4.1, and the sanding required between finish coats specified in 3.4.2. Whenever a deviation is noted, correction shall be made to the affected item and lot in process.

* 4.3.2.2 Moisture content of wood.- Prior to assembly, moisture content of wood requirement in 3.2.1 shall be determined in accordance with ASTM D 2016-65. The sample unit shall be one piece of each different component. The lot shall consist of all of the same components prepared under the same conditions, stored as a group and offered for inspection at one time. The inspection level shall be S-1 with an AQL of 4.0, expressed in terms of defects per hundred units. When testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit.

4.3.3 End product inspection.- A lot shall consist of all prie-dieus offered for inspection at one time. The sample unit for this inspection shall be one complete prie-dieu.

* 4.3.3.1 Visual examination.- Examination shall be made of the end item for defects in table I. The inspection level shall be level III with an acceptable quality level of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:30Z
Check the source to verify that this is the currentversion before use.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Not finish specified, rough, tacky, blistered, peeled, flaked, cracked, wrinkled, finger marks or scratched	X	
	Matter imbedded in finish		X
Construction and workmanship	Component missing or not type specified	X	
	Evidence of knots, decay, mineral streak, split, check hole, wane or shake	X	
	Not wood specified	X	
	Raised or torn grain		X
	Mortise extends beyond mating component	X	
	Gouge or toolmark		X
	NOTE: Minor surface defects burned in or repaired with wood filler shall not be considered defects		
	Open grain in exposed surface		X
	Artificial leather not stapled as specified		X
	Any exposed raw edge of artificial leather		X
	Cover of kneeler dirty or wrinkled		X
	Loose cover (shifts with slight hand pressure)		X
Marking	Missing, illegible, not as specified		X

4.3.3.2 Dimensional examination.- Inspection shall be made of the prie-dieu for compliance with overall dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:30Z
Check the source to verify that this is the currentversion before use.

4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units. Defects shall be as indicated in table II.

TABLE II.- Examination of preparation for delivery

Examinc	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as incomplete cushioning, voids in container not filled, and bulging or distortion of containers.

* 4.3.4.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

5.1.1.1 Cushioning.- Cushioning material shall be fabricated in the form of pads or blankets and may be any one of the following materials or combination of these materials to provide built-up cushioning of not less than the thickness specified hereinafter:

Macerated paper, cellulose-face 1/	Cellulose wadding 1/
Macerated paper, plain	Cotton wadding 1/
Wood fiber felt	Wood wool
Excelsior (sealed ends)	Moulded pulpwood
Shredded paper	Laminated cellulose wadding backed with corrugated fiberboard 1/

1/ When cellulose-faced macerated paper, cellulose wadding, cotton wadding, or laminated cellulose wadding backed with corrugated fiberboard are used, the initial sheet of highly calendered kraft paper, machine-glazed kraft paper, or waxed paper, may be omitted.

5.1.1.2 Packaging.- Each prie-dieu shall be wrapped with machine-glazed kraft paper, highly calendered kraft paper, or waxed paper having a minimum basis weight of 30 pounds per ream (24 x 36 - 500). The wrap shall be secured in position with gummed paper tape conforming to type III grade B of PPP-T-45. The prie-dieu shall be further covered with cushioning material specified in 5.1.1.1 to provide cushioning of not less than 3/4 inch in thickness. The cushioning material shall overlap all edges sufficiently to prevent any surfaces or edges from coming in contact with interior surfaces of shipping container.

* 5.1.2 Level C.- Each prie-dieu shall be cushioned and packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Each prie-dieu, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style FOL, grade V2s of PPP-B-636. Fiberboard interior packing forms, such as pads and cells conforming to type CF, class domestic, variety DW, grade 275 of PPP-F-320, shall be used to fill voids in the shipping container. Closure, waterproofing by means of tape, and reinforcing shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Each prie-dieu, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:30Z
Check the source to verify that this is the current version before use.

style FOL, type CF, variety SW, class domestic, grade 275 of PPP-B-636. Fiberboard interior packing forms, such as pads and cells, conforming to type CF, class domestic, variety DW, grade 275 of PPP-F-320 shall be used to fill voids in the shipping container. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- Each prie-dieu, cushioned and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.-

5.3.1 Shipping containers.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129. Special handling marking requirements applicable to fragile items, arrows and the word "UP" shall apply.

6. NOTES

6.1 Intended use.- The prie-dieu covered by this specification is intended to provide temporary kneeling space in Military chapels.

6.2 Ordering data procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article.- When preproduction sample is required (see 3.1).
(c) Source and delivery of Government furnished property (see 3.6).
(d) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

6.3 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - PE
Air Force - 28

Review activities:


Navy - PE
Air Force - 28
Armed Forces Chaplains Board

Preparing activity:


Army - GL

Project No. 9925-0163

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.

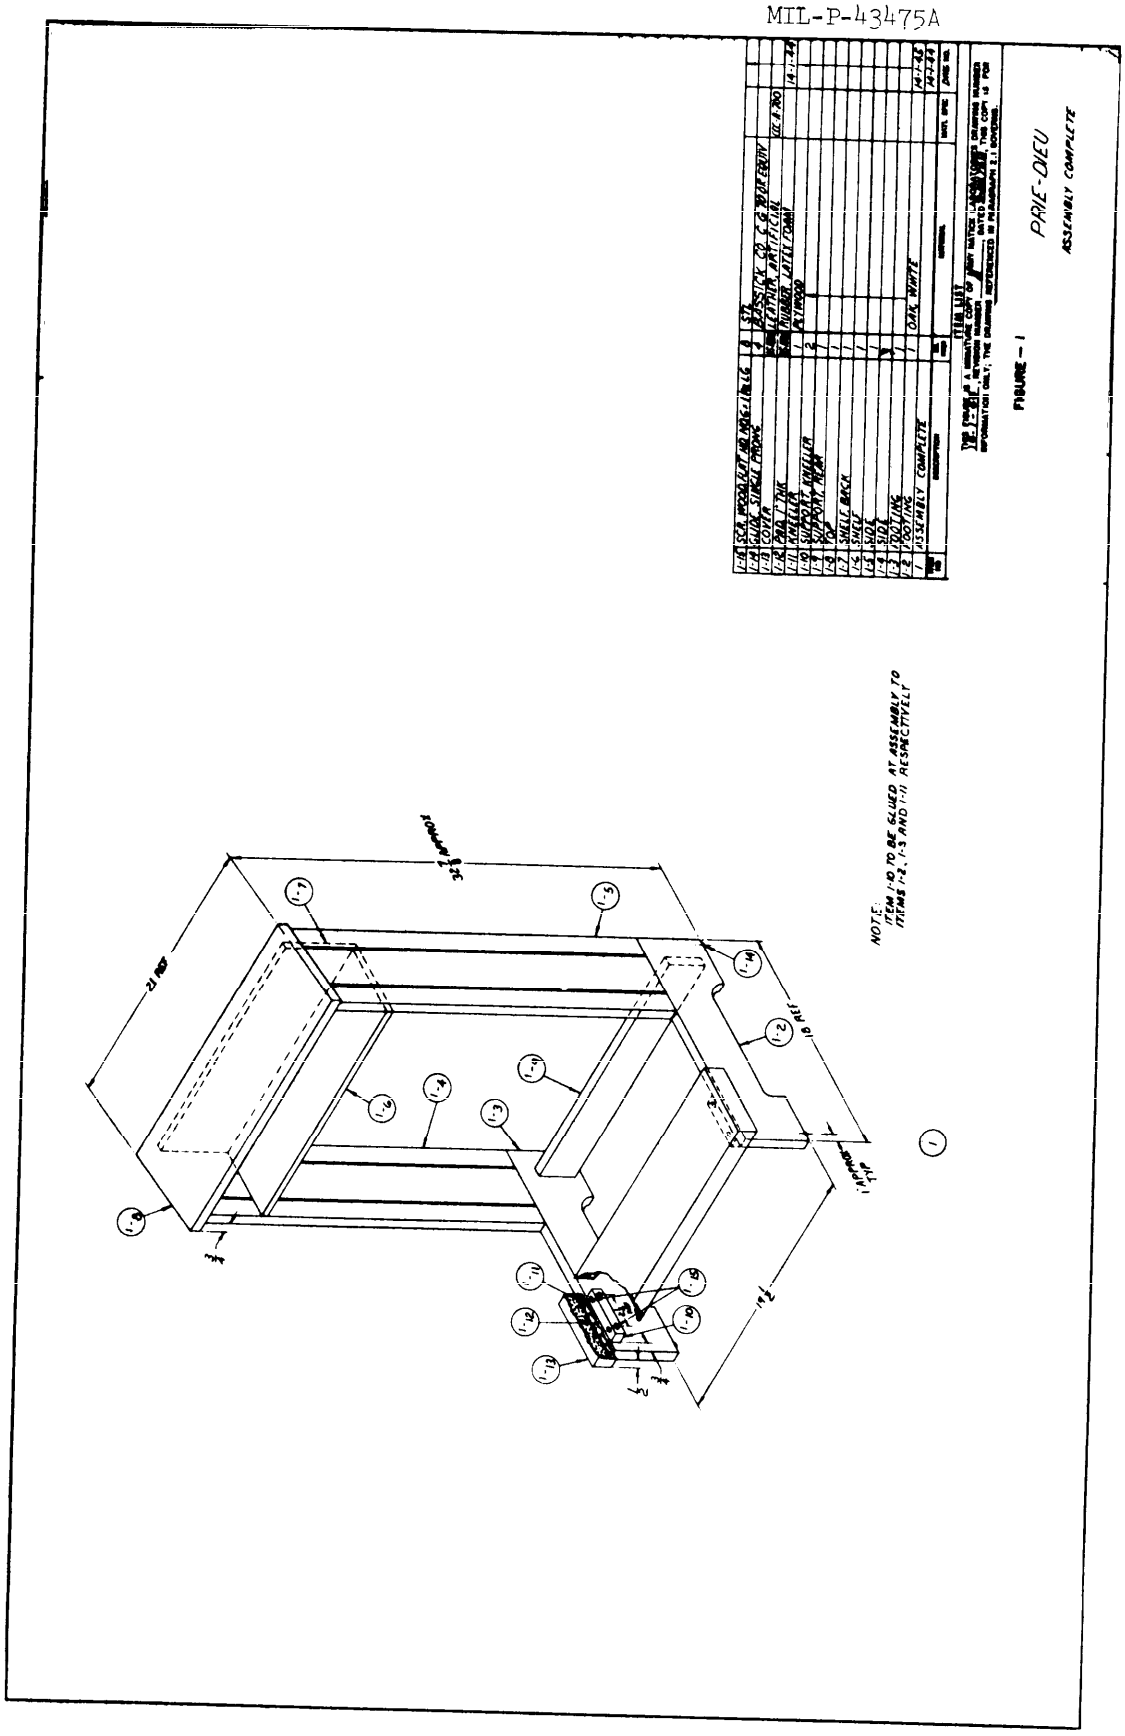

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:30Z
Check the source to verify that this is the currentversion before use.

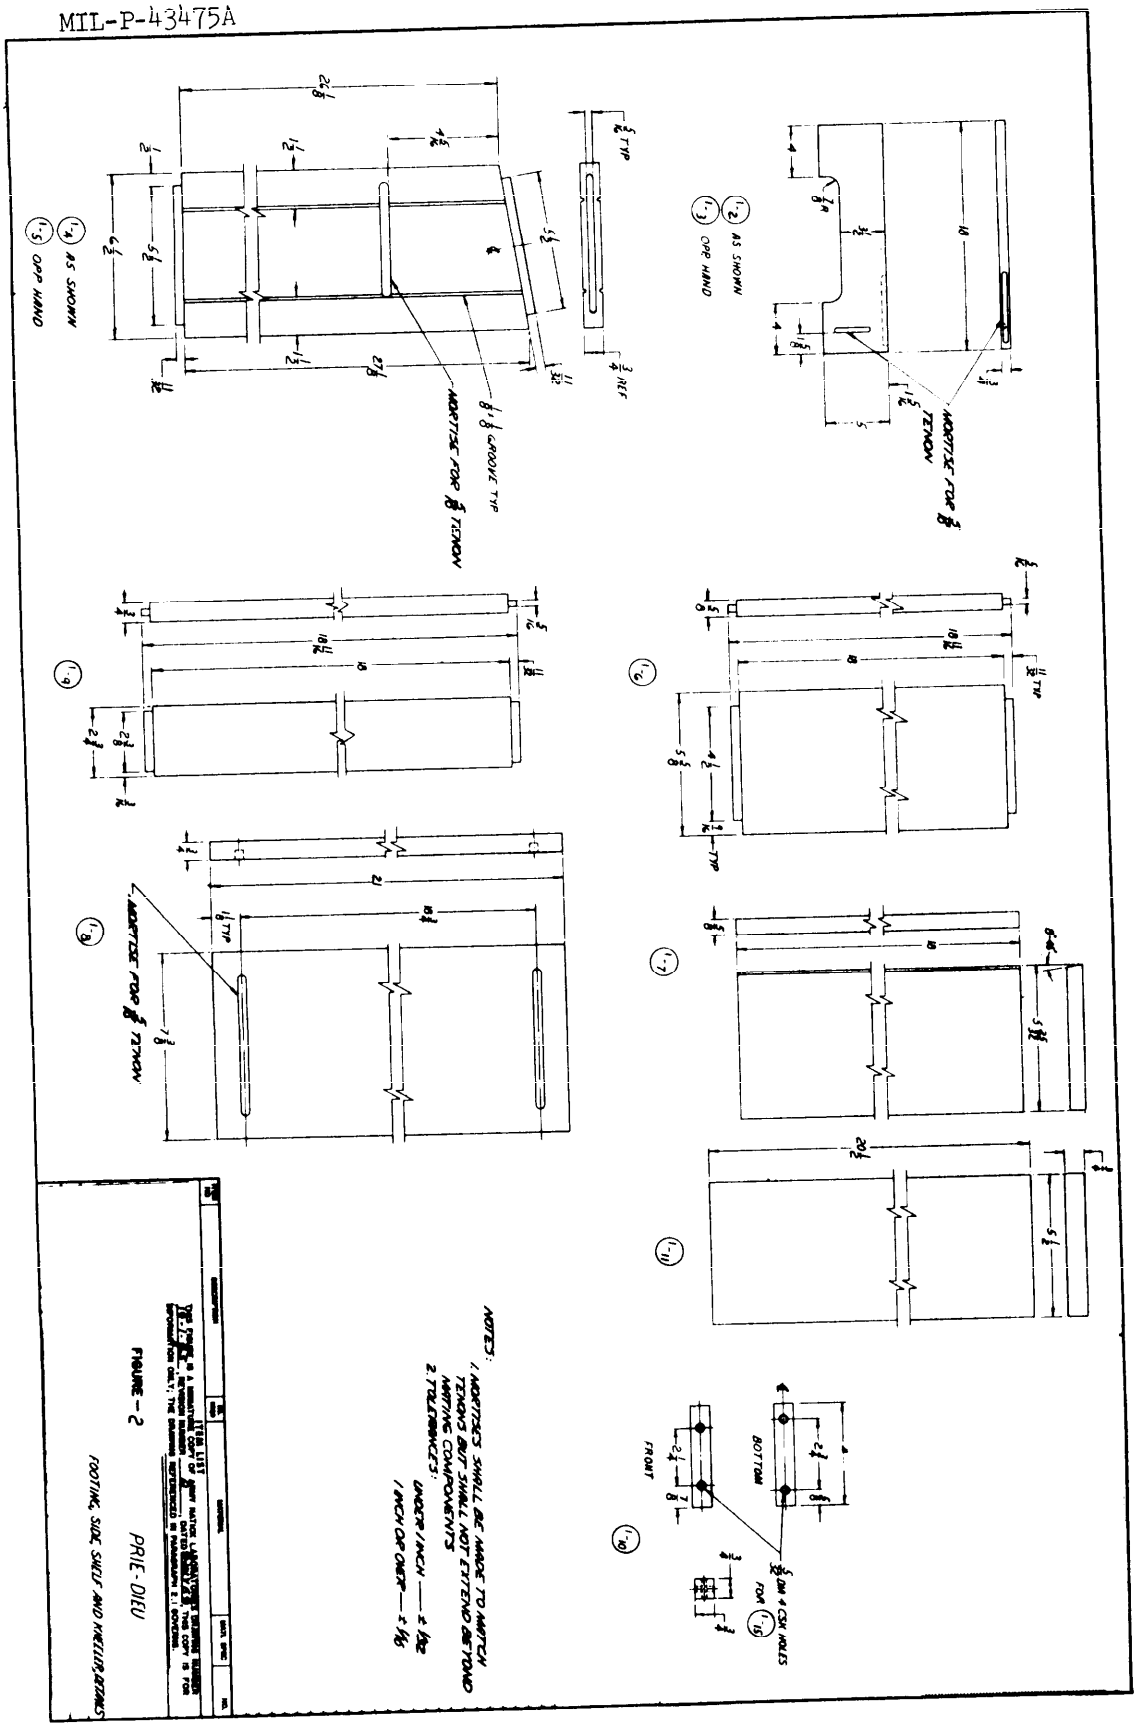

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:30Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Prie-Dieu MIL-P-43475A

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:30Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:30Z
Check the source to verify that this is the current version before use.