MILITARY SPECIFICATION

SANCTUARY LAMPS, VOTIVE GLASS HOLDER, AND VOTIVE GLASS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two types of sanctuary lamps, one type of votive glass holder, and one type of votive glass.

* 1.2 Classification. Items shall be selected from the following, as specified (see 6.2).

Item 1 - Sanctuary lamp

Type I - Candle burning
Type II - Electric

Item 2 - Votive glass holder

Item 3 - Votive glass

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-C-320 - Chromium Plating (Electrodeposited)
PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-636 - Box, Shipping, Fiberboard
PPP-B-676 - Box, Setup
PPP-C-843 - Cushioning Material, Cellulosic

MILITARY

MIL-E-20652/1A - Eyelets, Metallic, Rolled Flange Type; and Eyelet Washer

FSC 9925

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

ARMY NATICK LABORATORIES

14-1-82 - Holder, Votive Glass Assembly
14-1-83 - Votive Glass
14-1-84 - Sanctuary Lamp, Electric; Assembly
14-1-85 - Sanctuary Lamp, Electric; Details
14-1-86 - Sanctuary Lamp, Candle Type; Assembly
14-1-87 - Sanctuary Lamp, Candle Type; Details
14-1-88 - Sanctuary Lamp; Details (Electric and Candle Type)

(Miniature copies of drawings 14-1-82, 14-1-83, 14-1-84 and 14-1-86, identified as figures 1, 2, 3 and 4 respectively, are attached for information purposes only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specified issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Underwriters' Laboratories (UL)

UL Standard No. 153 - Lamps, Portable Electric

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 207 East Ohio Street, Chicago, IL 60611; 1285 Walt Whitman Road, Melville, Long Island, NY 11746; or 1655 Scott Blvd., Santa Clara, CA 95050.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.3).

* 3.2 Codes and standards. Electric sanctuary lamps shall comply with the applicable requirements of Underwriters' Laboratories Standard for Safety.

* 3.2.1 Compliance. Prior to approval of the first article, if one is submitted, or prior to commencing production, the supplier shall submit to the contracting officer or his authorized representative satisfactory evidence that the electric sanctuary lamp he proposes to furnish under this specification meet the applicable requirements of the Underwriters' Laboratories.

* 3.2.1.1 UL. Acceptable evidence of meeting the requirements of UL shall be the UL label, a UL listing mark, or a certified test report from a recognized independent testing laboratory, acceptable to the Government, indicating that the electric sanctuary lamp has been tested and conforms to UL Standard No. 153.

* 3.3 Materials and components. Materials and components shall be as specified herein and on the applicable drawings. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial sanctuary lamps provided the completed item complies with all provisions of this specification.

* 3.3.1 Glass. The glass shall be commercial ruby glass, uniform in color.

* 3.4 Construction.

* 3.4.1 Sanctuary lamps. The sanctuary lamps shall be fabricated of commercial brass. The glass shall be as specified in 3.3.1. The type I sanctuary lamp shall conform to the design and dimensions of Drawing 14-1-86. The type II sanctuary lamp shall conform to the design and dimensions of Drawing 14-1-84.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

* 3.4.2 Votive glass holder. The votive glass holder shall be fabricated of commercial brass and shall conform to the design and dimensions of Drawing 14-1-82.

* 3.4.3 Votive glass. The votive glass shall be fabricated of the glass specified in 3.3.1 and shall conform to the design and dimensions of Drawing 14-1-83.

* 3.5 Finish. All exterior brass components, except the sleeve on Drawing 14-1-84, shall be chromium plated in accordance with class 1, type I of QQ-C-320. The sleeve, shown on drawing 14-1-84, shall have a white, baked enamel finish.

* 3.6 Workmanship.

3.6.1 Glass components. Glass components shall be free of such defects as feathering, molted areas, fins or sharp edges, waves, heavy cords, deep checks, scratches, chips, cracks (including fire-cracks), soft blisters and open blisters. There shall be no stones greater than 0.03 inch in diameter, if well buried, or 0.02 inch if near the surface. The glass shall have not more than five bubbles and no bubble exceeding 0.05 inch in diameter or elongated bubble exceeding 0.10 inch in length.

3.6.2 Metal components. Metal components shall be free of such defects as fractures, tool marks, splits, punctures, dents, creases, loose fasteners or malformation. The plating and finishes shall be free from areas of poor or no coverage.

* 3.6.3 Electrical wiring. Wiring shall not be cut, abraded, or have excessive insulation stripped and shall be rightly joined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(1) First article inspection (see 4.3).
(2) Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:32Z
Check the source to verify that this is the currentversion before use.

* 4.3 First article inspection. When a first article is required, the lamps shall be examined for the defects in table I, and specified dimensions. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be in accordance with the provisions set forth in MIL-STD-105.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification, or applicable purchase document.

* 4.4.2 End item inspection. A lot shall consist of all end items of one type offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated end item.

* 4.4.2.1 Visual examination. Examination shall be made of the end item for defects in table I. The inspection level shall be level III with an acceptable quality level of 6.5, expressed in terms of defects per hundred units.

TABLE I. Defects

Examine	Defect
Glass component	
Color	Not commercial ruby color.
	Color not uniform.
Appearance and workmanship	Any feathering.
	Any mottled areas, visible particles of foreign or unmelted material.
	Dirty, i.e., cannot be cleaned with soap and water.
	Any wave or heavy cord.
	Any deep check, scratch, chip or crack (including fire cracks).
	Any open or soft blister.
	Any stone, if well buried, greater than 0.03 inch in diameter, or greater than 0.02 inch, if near the surface.
	More than five bubbles.
	Any round bubble greater than 0.05 inch in diameter.
	Any elongated bubble greater than 0.10 inch in length.
	Any fin or sharp edge.
Metallic components	
Finish (as applicable)	Not finish required.
	Area of poor or no coverage.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE I. Defects (cont'd)

Examine	Defects
Construction and workmanship	Tool mark, fracture, split, puncture, dent, crease, loose fastening or malformation.
Electrical assembly (Electric Sanctuary Lamp only)	Wiring cut, abraded, loose at terminals, or excessively stripped insulation.

* 4.4.2.2 Dimensional examination. Inspection shall be made of the end item for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-4 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.4.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking are in accordance with section 5 of this specification. The sample unit shall be one shipping container fully prepared for delivery except it need not be sealed. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units. Defects shall be scored as specified in table II.

TABLE II. Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps; strapping or sealing, improper or missing; closures improperly affixed; inadequate stapling; bulging or distortion of containers.
Weight	Gross weight exceeds requirements.

* 4.5 Certificate examination. Certificates of compliance, certified test reports, approval labels or listing marks for codes and standards, as applicable, that are submitted as proof of compliance with the specification requirements, shall be examined and validated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Item 1, types I and II, candle burning and electric sanctuary lamps. The cover shall be removed from each type I and II candle burning and electric sanctuary lamp and completely wrapped in minimum 1/2-inch thick cushioning material conforming to type I or II, class B of PPP-C-843. Each lamp shall be wrapped as specified for the cover. Prior to wrapping the type II lamps, the electric cord shall be neatly coiled around the lamp base. The lamp and cover shall then be packaged in the most compact manner in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 200 of PPP-B-636. Closure shall be in accordance with the appendix of PPP-B-636.

* 5.1.1.2 Item 2, votive glass holder. Each votive glass holder shall be completely wrapped in cushioning material conforming to type I or II, class B of PPP-C-843, or tissue paper. Each wrapped votive glass holder shall then be packaged in a snug-fitting folding or setup paperboard box conforming to variety 1, style III or VI, type G, class i of PPP-B-566; or type I, variety 1, class A, style 2 of PPP-B-676. Closure shall be in accordance with the appendix of the applicable box specification.

5.1.1.3 Item 3, votive glass. Each votive glass shall be packaged as specified in 5.1.1.2, except that the wrap shall be minimum 1/2-inch thick cushioning material conforming to type I or II, class B of PPP-C-843.

5.1.2 Level C. Items shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B or C as specified, (see 6.2).

5.2.1 Level A. Items of one type only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing shall be in accordance with the appendix of PPP-B-636. The gross weight of the shipping container shall not exceed 70 pounds.

5.2.2 Level B. Unless otherwise specified (see 5.2.2.1), items of one type only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636. The gross weight of the shipping container shall not exceed 70 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall conform to style RSC, V3c, V3s, V4s of PPP-B-636.

* 5.2.3 Level C. Items of one type only, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking requirements required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. Special handling marking requirements applicable to fragile items shall apply.

6. NOTES

6.1 Intended use. The sanctuary lamps, votive glass holder and votive glass covered by this specification are intended for use in the sanctuary of Military Chapels.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Item required (see 1.2).
(c) Type for item 1 (see 1.2).
(d) When first article is required (see 3.1, 4.3 and 6.3).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When weather resistant grade fiberboard is required for level B pack (see 5.2.2.1).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil - Downloaded: 2026-01-21T21:32Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - PE
Air Force - 28

Review activities:


DSA - GS
Armed Forces Chaplains Board

Preparing activity:

Army - GL

Project No. 9925-0201

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

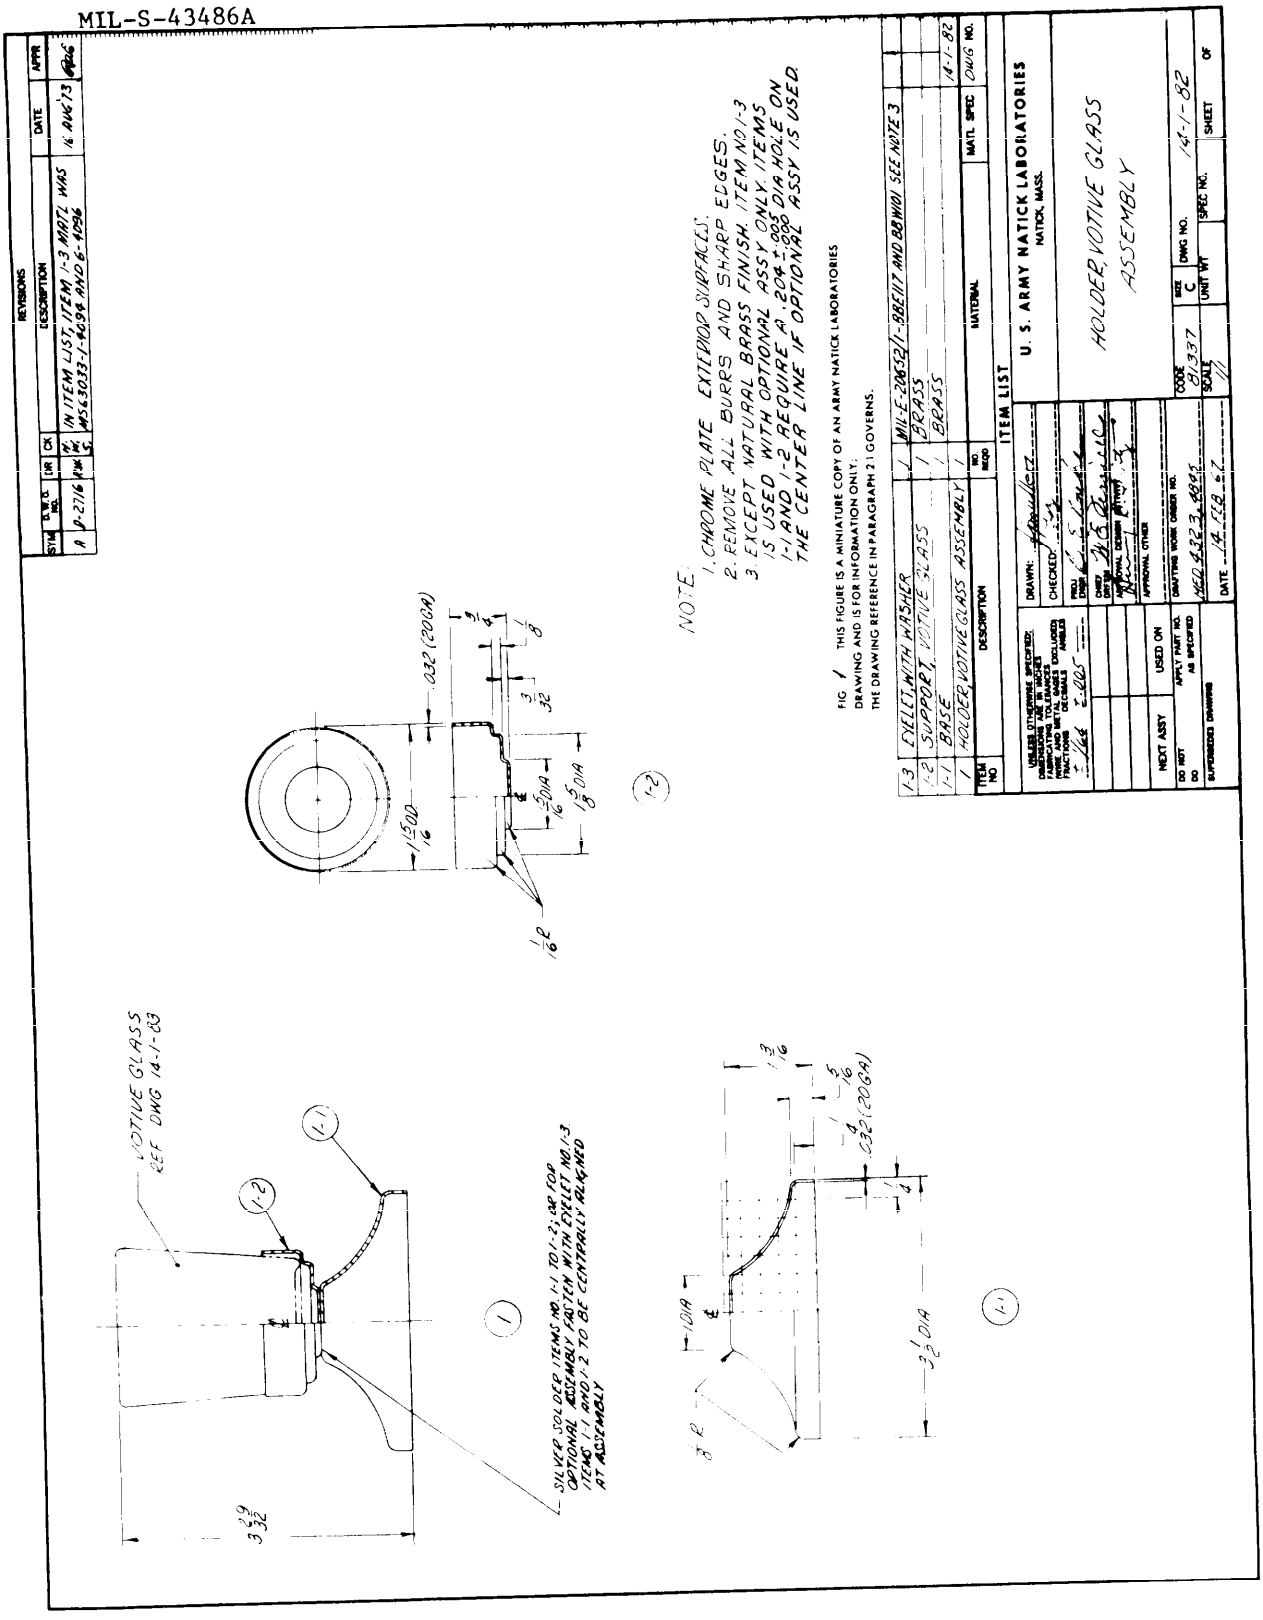

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:32Z
Check the source to verify that this is the currentversion before use.


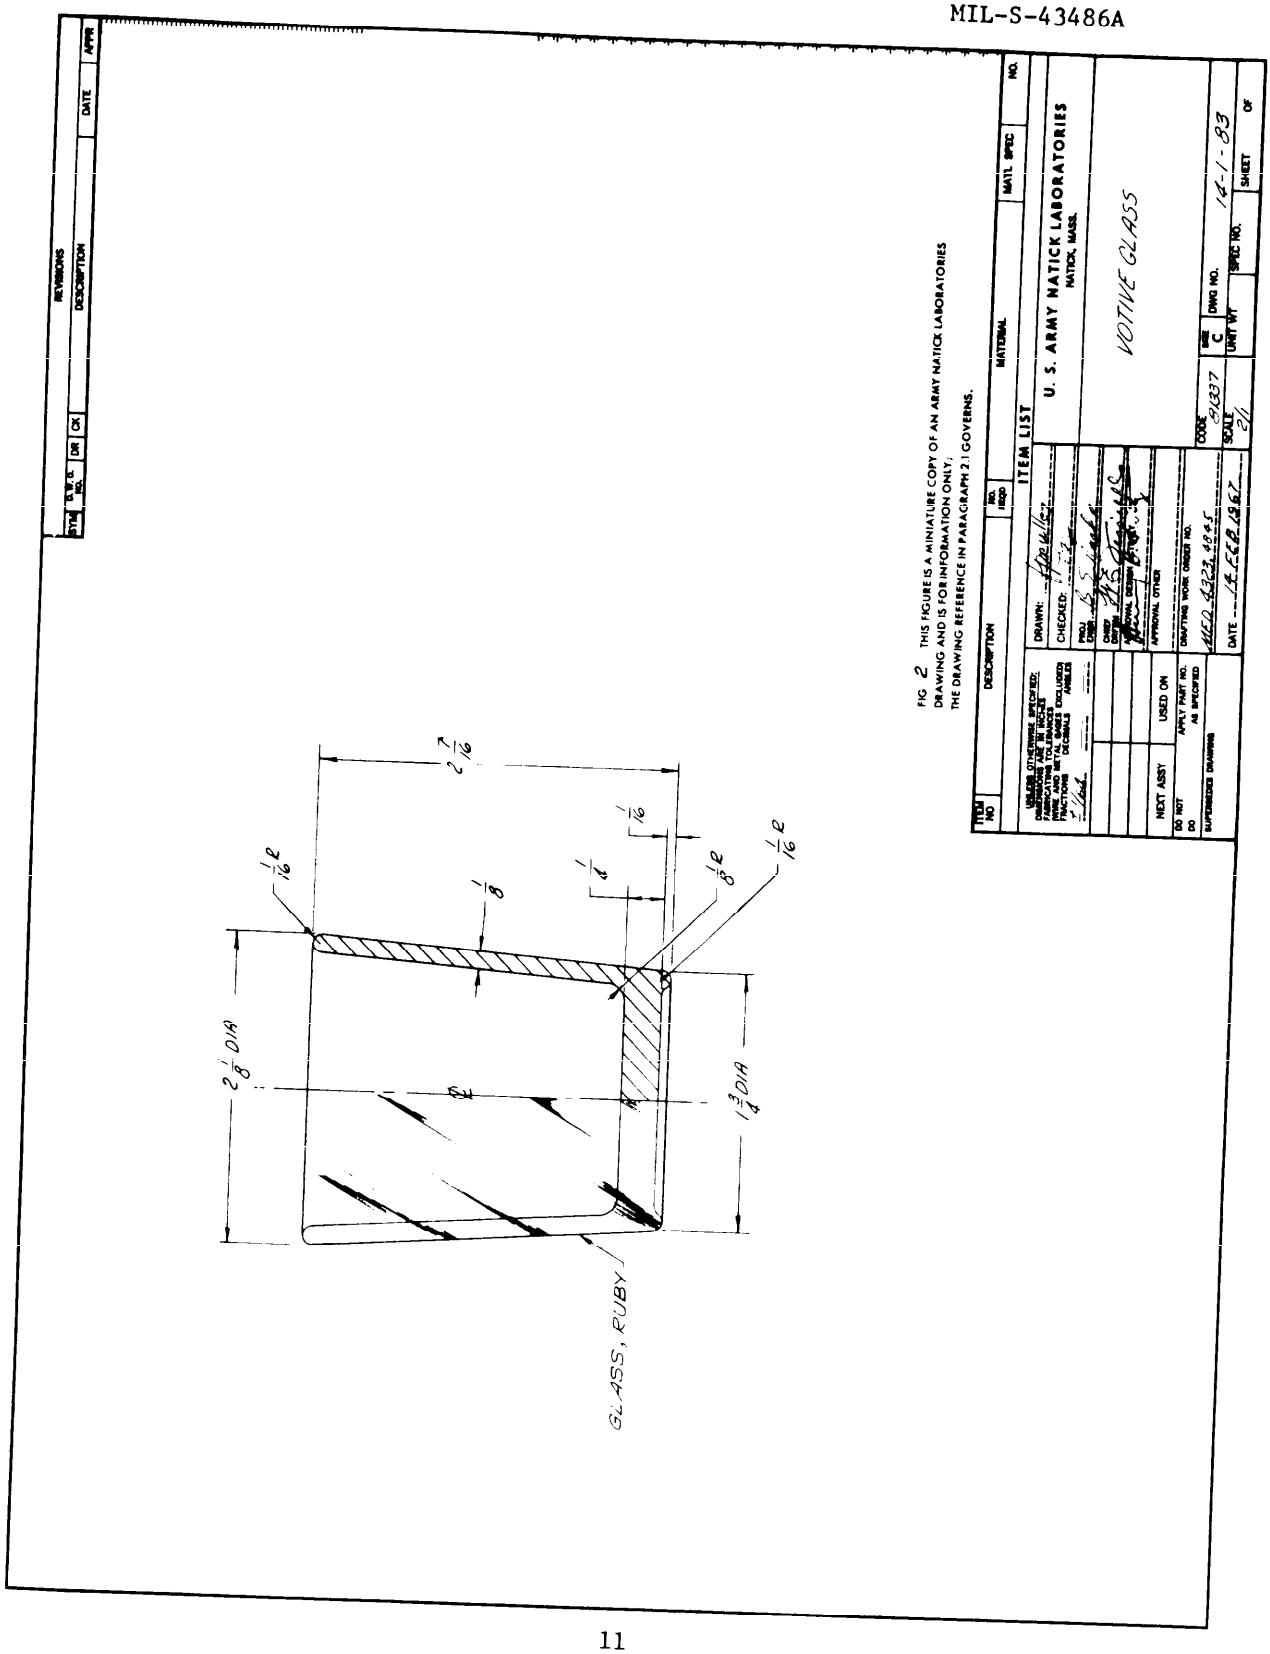


FIG 2 THIS FIGURE IS A MINIATURE COPY OF AN ARMY NATICK LABORATORIES DRAWING AND IS FOR INFORMATION ONLY; THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:32Z
Check the source to verify that this is the current version before use.

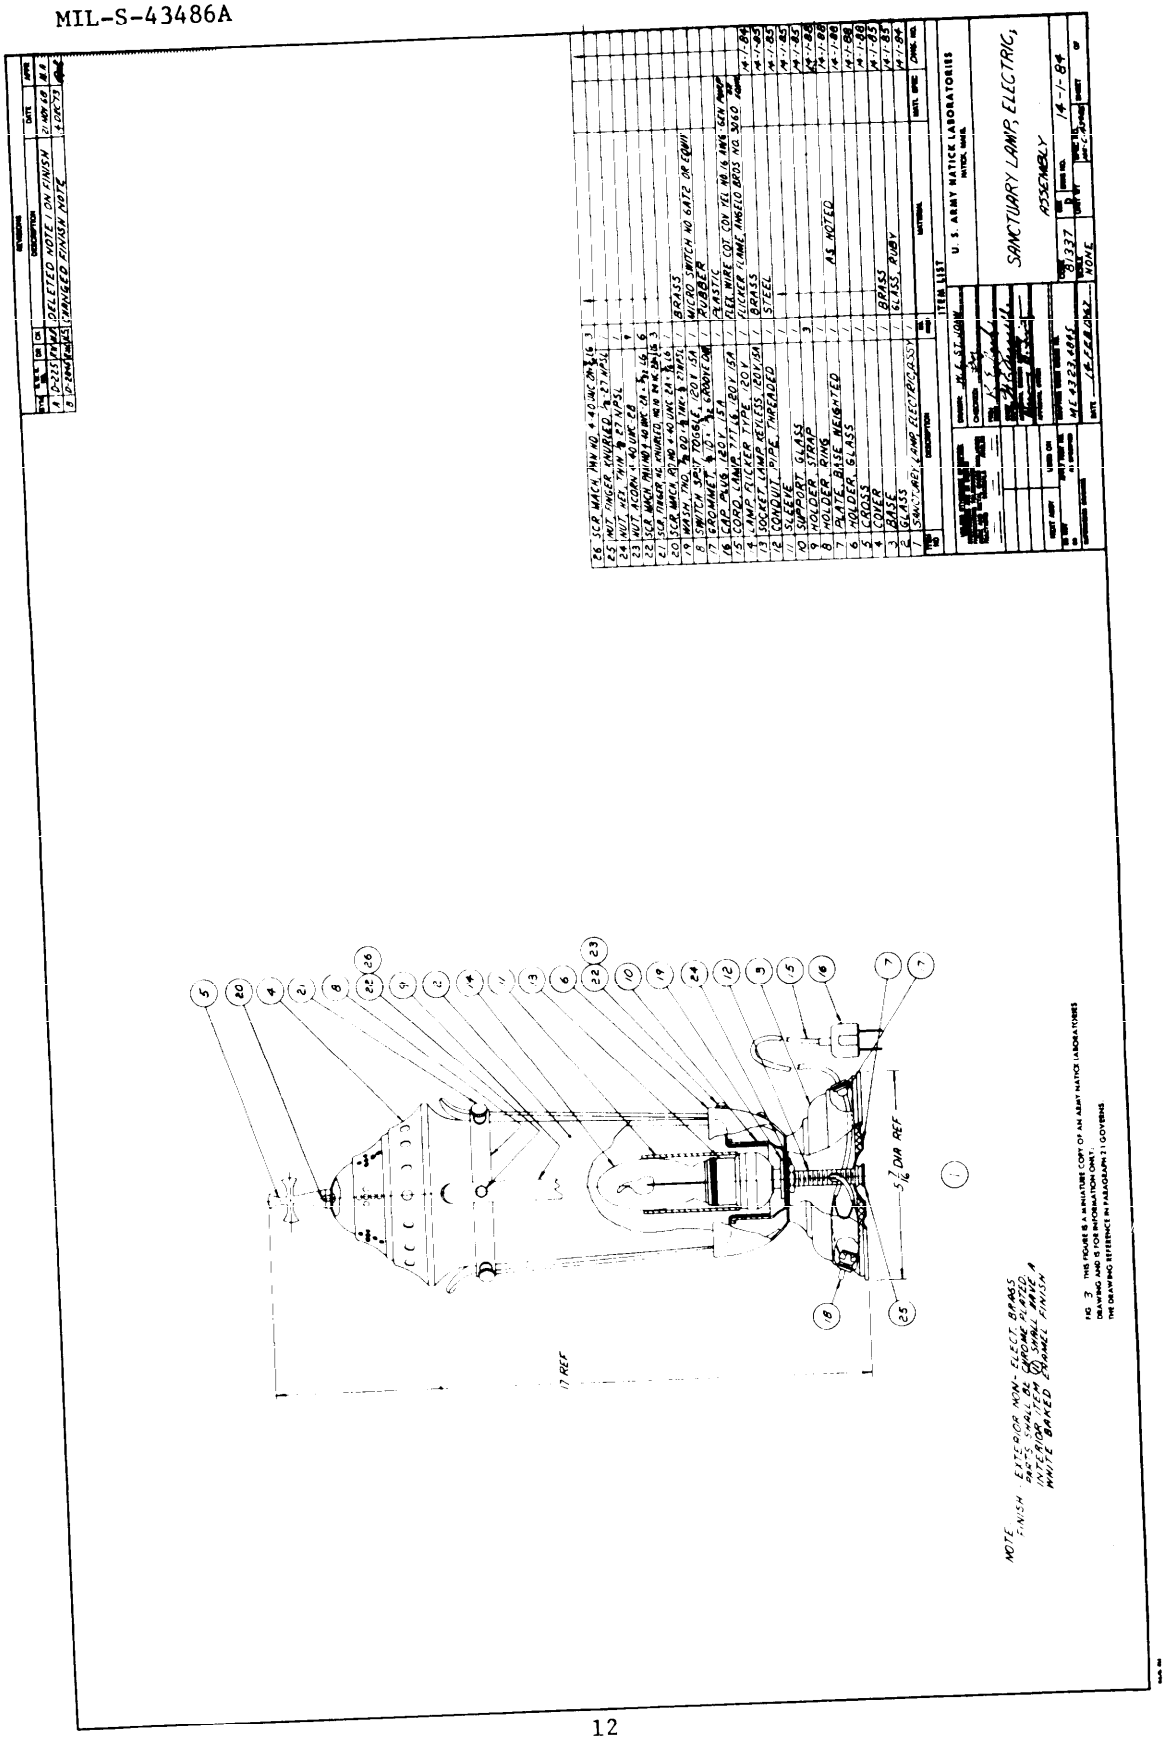

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

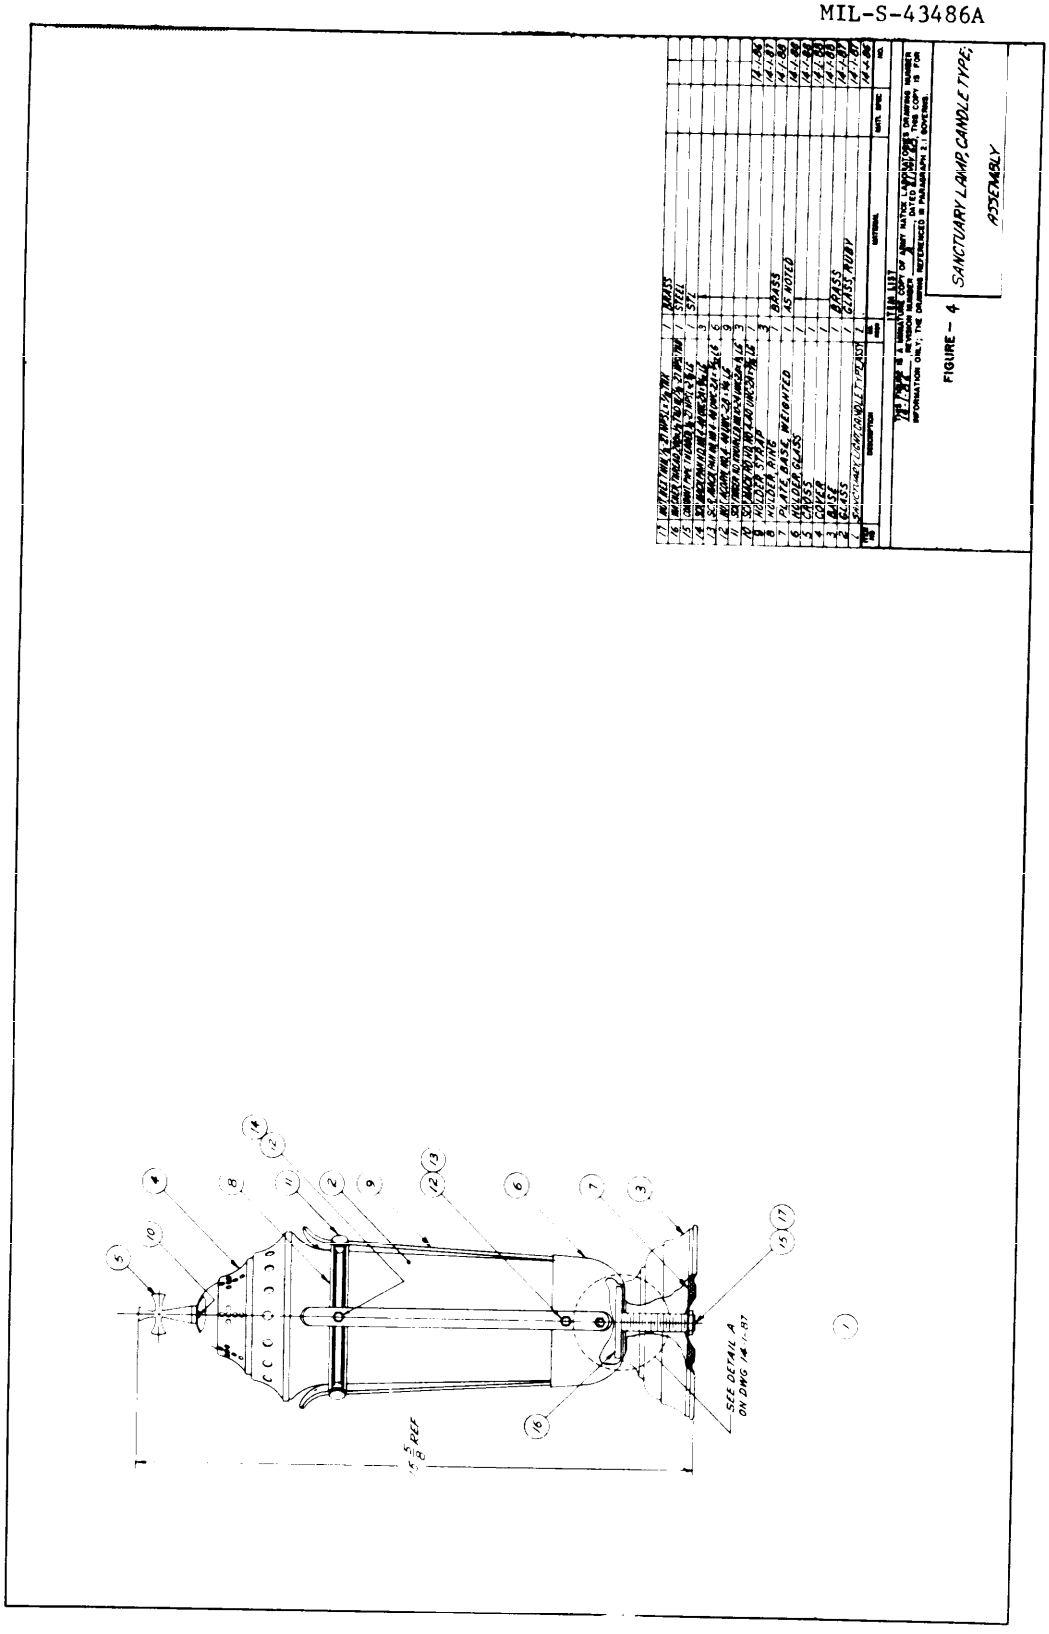


FIGURE – 4 SANCTUARY LAMP, CANDLE TYPE; ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-S-43486A SANCTUARY LAMPS, VOTIVE GLASS HOLDER, AND VOTIVE GLASS

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:32Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:32Z
Check the source to verify that this is the current version before use.