MIL-S-43488C(GL)
20 May 1988
SUPERSEDING
MIL-S-43488B(GL)
5 September 1978

MILITARY SPECIFICATION

SKIRT, WOMAN'S, WOOL, FIELD

This specification is approved for use by the U.S. Army Natick Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for a wool field skirt.

1.2 Classification. The skirt shall be one type in the following sizes (see 6.2):

Schedule of sizes

8
10
12
14
16
18
20

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	- Thread, Gimp, Cotton, Buttonhole
V-T-295	- Thread, Nylon
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-B-371	- Braid, Textile, Tubular
MIL-C-508	- Cloth, Oxford, Nylon, 3 Ounce
MIL-C-823	- Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-T-5237	- Tape, Textile; Webbing, Textile; Rayon
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

Source: https://assist.dla.mil.-- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

MIL-STD-731 - Quality of Wood Members for Containers and Pallets
MIL-STD-1609 - Provisions for Evaluating Quality of Women's Skirts

(Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies should be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

* 3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Materials.

3.3.1 Basic material. The basic material shall be 18-ounce wool serge, Olive Green 108, conforming to type I, class 1 of MIL-C-823.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:32Z
Check the source to verify that this is the current version before use.

3.3.2 Lining material. The material for lining the plackets shall be nylon oxford, 3-ounce, Olive Green 106, conforming to type I, class 2 of MIL-C-508 except that the colorfastness to wet-dry cleaning, crocking, and light shall not apply.

3.3.3 Hem tapes. The tape for hem shall be 1/2 ± 1/16 inch wide, and shall conform to type I of MIL-T-5237.

3.3.4 Hanger loop braid. The hanger loop braid shall be dyed to match the basic material and shall conform to type IX or X, class 1 of MIL-B-371 except that "good" fastness to laundering (after 3 cycles) shall also be required. As an alternate, the hanger loops may be made from the lining material (see 3.3.2) or the hem tape (see 3.3.3).

3.3.5 Labels. Each skirt shall have a size and a combination identification-instruction label conforming to type I of DDD-L-20. The laundering requirements of DDD-L-20 shall apply.

3.3.5.1 Size label. The size label shall conform to class 2.

3.3.5.2 Combination label. The combination identification-instruction label shall conform to classes 1 and 3 with the class 1 label requirements preceding the body of instructions. The item description of the skirt shall be: SKIRT, WOMAN'S, WOOL, FIELD. The body of instructions shall be as follows:

Dry clean, or launder by hand
or by Wool Method Formula II,
TM-10-280
DO NOT REMOVE LABEL

3.3.6 Thread. The thread shall be a cotton-covered polyester core conforming to MIL-T-43548, ticket Nos. 50-2 or 3 ply for seaming, stitching, buttonholes, and hand and machine button sewing (except automatic machine which sews and shanks) 70-2 ply for overedging. The thread shall be dyed Olive Drab S-1, C.A. 66022. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord, special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards, and shall be tested for these requirements and for color fastness (3.3.6.1) in accordance with test method requirements of V-T-295.

3.3.6.1 Colorfastness. The dyed thread shall show fastness to laundering, wet-dry cleaning, and light equal to the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, wet-dry cleaning, and light.

3.3.7 Gimp. The gimp for reinforcing the buttonholes shall be No. 8, cotton, Olive Drab S-1, C.A. 66022, conforming to type I or II of V-T-280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

3.3.7.1 Colorfastness. The dyed gimp shall show fastness to laundering and wet-dry cleaning equal to or better than the standard sample. When no standard sample is available, the dyed gimp shall show "good" fastness to laundering and wet-dry cleaning.

3.3.8 Buttons. The buttons shall be sewing hole type, DOD Olive Green BP, Cable No. 62016, glossy finish, conforming to type II, class D, style 20 or 21, size 24-line of V-B-871.

3.4 Design. The skirt is six-gored, with a buttoned placket on each side, and a sewn-on waistband with a three button closure on each side to allow for size adjustment, and is unhemmed.

3.5 Figures. Figures are furnished for information only. To the extent of any inconsistencies between the written document and the figures, the document shall control.

3.6 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a 3/4-inch seam allowance for front and back panel seams, 1 inch for side seams, and 3/8 inch for all other seams.

3.6.1 Pattern parts. The pattern parts and applicable material for cutting the skirt parts shall be as specified in table I.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Basic material wool serge cloth	Center front	1
	Side front	2
	Center back	1
	Side back	2
	Placket	2
	Front waistband	1
	Back waistband	1

3.7 Construction.

3.7.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. Where two or more seam or stitching types are given for the same operation, any one of them may be used.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:32Z
Check the source to verify that this is the currentversion before use.

When stitch type 401 is used, the looper (under thread) shall be on the inside of the skirt. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats, puckers, or open seams will not result. Thread tension shall be maintained so that there is no tight or loose stitching. All seams shall start and finish evenly.

3.7.1.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.7.1.2 Thread breaks and ends of seams. The ends of all seams and stitchings (except darts) when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks, all stitch types, shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming may be repaired using 301 stitch type. The thread ends at bottom of darts shall be trimmed to a length of 1/4 to 1/2 inch.

3.7.1.3 Overedge stitching. The gage of the overedge stitching shall be 3/16 to 1/4 inch. The guide and knives for the overedge machine shall be set to trim only the ravelled edges of the fabric.

3.7.2 Buttonholes. The buttonholes shall be cut-first or cut-after, eyelet-end taper-bar or square-bar type worked over gimp with the purling on the outside of the skirt. When the square-bar type is used, the open end shall be bar-tacked.

3.8 Manufacturing operation requirements. The skirt shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching to facilitate manufacture is permissible provided the thread is removed or does not show on the finished skirt.

3.8.1 Shade and size marking. The cut parts of the skirt shall be marked to ensure a uniform shade and size throughout the skirt. Any method of marking may be used except:

a. Corrosive metal fastening devices.

b. Sew-on type tickets.

c. Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

3.8.2 Pressing. All pressing as required in table II shall be performed with a heated pressing iron or machine. Any additional under-pressing is permissible.

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ looper
1.	Cutting					
	a. Cut the skirt in strict accordance with the patterns furnished which show directional lines, size, and notches for proper assembly of all parts. Directional lines shall be placed in the warp direction of the material. The cut parts from the top and bottom ply shall match and conform to the pattern.					
	b. Cut all basic material parts of the skirt out of the same piece of material, except that the plackets may be cut from ends provided the cut parts match the basic material.					
	c. Cut stripping for placket linings (four each garment) out of the nylon oxford material on the bias, 2-1/2 to 2-3/4 inches wide (see operation 7).					
	d. Cut the stripping for hanger loops (if the nylon oxford is used) sufficiently wide for the finished loops to measure 1/4 to 3/8 inch wide (see operations 4b or 4c).					
	e. Cut the hanger loops (two each) of sufficient length to measure 1-1/2 ± 1/4 inches long (folded) in the finished skirt (see operations 4 and 11).					
	f. Cut hem tapes not less than 65 inches long (see operation 17).					
2.	Replacement of damaged parts					
	Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ looper
2.	Replacement of damaged parts (cont'd)					
	material defects and damages, as specified in MIL-STD-1609 are excluded and replaced with non-defective and properly matched material.					
3.	Shade and size marking					
	Mark, ticket, or bundle all cut parts of the skirt except those cut from ends to insure correct size and a uniform shade throughout the skirt.					
4.	Make hanger loop stripping (optional)					
	a. Fold hem tape in half lengthwise and stitch edges together.	301	EFu-1(a)	10-14	50	50
	-or-					
	b. Fold strip (see operation 1d) of material in half lengthwise; turn in raw edges and stitch 1/16 to 1/8 inch from edge. The folded edge may be stitched 1/16 to 1/8 inch from edge.	301 301	EFp-1 or EFp-2	10-14 10-14	50 50	50 50
	-or-					
	c. Superimpose two strips (see operation 1d) of material; turn in the raw edges on each side and stitch together 1/16 to 1/8 inch from each edge.	301	EFn-2	10-14	50	50

Source: https://assist.dla.mil - Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ looper
5.	Overedge skirt panels					
	Overedge the seam allowances on both sides of center front, center back, side backs, and side fronts except the placket opening on the side fronts. Overedging placket opening on side backs is optional.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70
6.	Make darts					
	a. Fold darts as indicated by marks on pattern and stitch, tapering to nothing 3/4 to 1 inch below drill hole.	301	OSf-1	10-14	50	50
	b. Press front and back darts flat with inside folded edge turned toward center front and center back, respectively.					
7.	Attach lining to plackets					
	a. Cut the stripping (see operation 1c) for placket linings the same lengths as the placket pieces.					
	b. Place a lining piece on the face side of each placket piece with the back edges even and seam 1/4 inch from edge.	301 or 401	BSp-2(a) BSp-2(a)	10-14 10-14	50 50	50 70
	c. Turn the lining over the row of stitches, around the edge of the material, and seam with a second row of stitches 1/16 to 3/32 inch from the inside edge of binding.	301	BSp-2(b)	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ looper
7.	Attach lining to plackets (cont'd)					
	d. Place a lining piece on face side of each side front at placket openings and seam 1/4 inch from edge.	301 or 401	BSp-2(a) BSp-2(a)	10-14 10-14	50 50	50 70
	e. Turn the lining over the row of stitches, around the edge of the material, and seam with a second row of stitching 1/16 to 3/32 inch from the inside edge of binding.	301	BSp-2(b)	10-14	50	50
	f. The inner edge of the placket linings may be stitched down.	301	LSbj-1	10-14	50	50
	g. Pink or overedge bottom edge of plackets.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70
8.	Attach placket pieces to backs					
	a. Place a placket piece on each side back at marks indicated on pattern, with the material face to face and the raw edge of placket piece even with the raw or overedged edge of the side back. Stitch placket to skirt 3/8 inch from edge.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70
	b. Press seam open.					
	c. Fold placket to underside 1 inch to 1-1/8 inches from joining seam and stitch through joining seam, or on placket 1/16 to 3/32 inch from joining seam, to form a welt, catching the lining and underside of placket in the stitching.	301	BSp-2(b)	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ looper
9.	Assemble skirt					
	a. Starting at waistline, stitch side fronts to center front and side backs to center back, matching notches.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70
	NOTE: The center back is wider than the center front and the side backs have the longer darts.					
	b. Starting at notch at lower end of placket, stitch side seams, matching notches.	301 or 401	SSa-1 SSa-1	10-14 10-14	50 50	50 70
	NOTE: Operation 9b and 10c may be combined into one operation.					
	c. Press seams open, except for side seams. Press side seam allowances gradually tapered, so that the side seam allowances at the lower end of the plackets are both pressed toward the front.					
10.	Finish plackets					
	a. Fold back side fronts at marks indicated on pattern to form 2-inch wide facings and stitch across top 1/8 to 1/4 inch from edge.	301 or 401 or 101	SSa-1 SSa-1 SSa-1	6-14 6-14 6-14	50 50 50	50 70 50
	b. Press, creasing edge of opening, keeping the placket facings smooth and flat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ looper
10.	Finish plackets (cont'd)					
	c. Join front plackets to back plackets with the stitching 1/2 to 3/4 inch up from bottom edge. The stitching shall be through all plies of the back placket and the facing and lining of the front placket and shall extend from the bound edge on the front placket facing to the side seam. Do not stitch beyond side seam.	301	SSa-1	10-14	50	50
	d. Tack bottom of each placket opening on the outside of skirt with an automatic 1/2 ± 1/8 inch horizontal straight tack or bartack. The tacks shall not extend beyond side seam.	Bartack or 301		28 per bartack 28 per tack	50 50	50 50
11.	Attach waistband, labels, and hanger loops					
	a. Position a hanger loop on each side of back next to, or not more than 1/4 inch from the back bound edge of placket. The ends shall be superimposed or abutted and may be stitched into position prior to setting waistband.	Hand or Machine			50 50	 50
	b. Stitch front waistband and back waistband to the inside top of skirt, matching notches, and catching the ends of the folded hanger loops and the top edges of the labels in the stitching. The labels shall be positioned side by side on center of back with the size label on the left side (when skirt is worn). The combination label shall be centered (± 1 inch off center tolerance) on the center back. The stitching shall not be through the label printing.	301 or 401	BSg-2(a) BSg-2(a)	10-14 10-14	50 50	50 70

Source: https://assist.dla.mil - Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/looper
11.	Attach waistband, labels, and hanger loops (cont'd)					
	c. Fold the waistbands in half lengthwise; seam the straight ends of back and the pointed ends of front. Trim, turn ends to outside and work out corners and points.	301	SSe-2(a)	10-14	50	50
		or 401	SSe-2(a)	10-14	50	70
	-or-					
	d. As an alternate method, the straight ends of back waistband and the pointed ends of front waistband may be seamed, trimmed, and turned prior to setting waistband to skirt.	301	SSe-2(a)	10-14	50	50
		or 401	SSe-2(a)	10-14	50	70
	e. Turn under free edge of back and front waistbands and stitch to skirt on outside; continue the stitching around ends and along top of waistbands. The edge stitching shall be 1/16 inch gage. The stitching attaching waistband (operation 11b) shall not be exposed on outside of skirt.	301	BSg-2(b) and	10-14	50	50
		301	SSe-2(b) and	10-14	50	50
		301	OSf-1	10-14	50	50
12.	Make buttonholes					
	a. Make two 5/8 to 3/4 inch cut-length buttonholes on each front placket at marks indicated on pattern with the inside edge of the eyelets 1/2 to 5/8 inch from edge of opening.	Buttonhole		44-46 not including tack	50	50
	b. Make a 5/8 to 3/4 inch cut-length buttonhole centered (1/8 inch off center tolerance) on each pointed end of front waistband. The inside edge of the eyelet shall be 3/4 to 7/8 inch from the point.	Buttonhole		44-46 not including tack	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ looper
12.	Make buttonholes (cont'd)					
	c. When the square-bar type of buttonhole is used, it shall be bartacked in a separate operation.	Bartack		21 per bartack	50	50
13.	Attach buttons					
	a. Sew two buttons on each back through all plies to correspond with buttonholes on front plackets and with the center of the buttons 1/16 to 3/16 inch from the placket joining seam, but not on placket piece. The closures, when buttoned, shall lie smooth without puckers or twists.	101 or		14-15 per button	50	
		301 or		14-16 button	50	50
		Hand or		3 per button double thread	50	
		801 (see figure 2)		7 (min) 1 deep set per button	4 nylon	
	b. Sew a button on each end of the back waistband directly above the placket joining seam. Sew two additional buttons back of the first button on each back waistband 1 ± 1/8 inch (center to center) apart.	101 or		14-16 per button	50	
		301 or		14-16 per button	50	50
		Hand or		3 per button double thread	50	
		801 (see figure 2)		7 (min) 1 deep set per button	4 nylon	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements (cont'd)

No.	Requirement	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ looper
13.	Attach buttons (cont'd)					
	c. Hand sewn buttons shall be shank wrapped four times and the ends of the thread shall be securely tacked with not less than two stitches. Machine sewn buttons shall be shanked with a minimum of ten wraps with three locking stitches.					
14.	Overedge bottom of skirt					
	Overedge bottom of skirt with all gore seams spread open.	502 or 503	EFd-1 EFd-1	6-10 6-10	70 70	70 70
15.	Clean skirt					
	Trim thread ends and remove all loose threads, spots, stains, and shade tickets.					
16.	Press skirt					
	Press skirt removing gloss marks, wrinkles, and thread or seam impressions.					
17.	Prepare for packing					
	Place hem tape in a plain envelope and attach to hanger loop with string.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The unhemmed skirt shall conform to the finished measurements in table III. The tolerance for all dimensions shall be ± 1/2 inch.

TABLE III. Finished measurements (in inches)

	Size						
	8	10	12	14	16	18	20
1/2 waist 1/	12	12-3/4	13-1/2	14-1/4	15	16	17
1/2 hip 2/	17-1/2	18-1/4	19	19-3/4	20-1/2	21-1/2	22-1/2
Length 3/	27	28	28-1/2	29	29-1/4	29-1/2	29-3/4

1/ Measure from folded edge to folded edge at center of waistband with the waistband buttoned on the middle buttons.

2/ Measure across skirt from folded edge to folded edge 1/2 inch below placket opening.

3/ Measure from lower edge of waistband to bottom edge of skirt, down center of back.

* 3.10 Workmanship. The finished skirt shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 3.2), it shall be examined in accordance with provisions of MIL-STD-1609 for visual and dimensional examinations for Semi-Dress ("SD") skirts.

* 4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

* 4.4.2 End item examination. Sampling and examination of the end item for visual, dimensional, and packaging defects shall be performed in accordance with the provisions of MIL-STD-1609. The skirts shall be classified as Semi-Dress ("SD") skirts.

* 4.4.3 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:32Z
Check the source to verify that this is the currenversion before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Folding. Each skirt shall be laid out flat. Two lengthwise parallel folds shall be made on the skirt resulting in a folded width of 12 inches. The top of the skirt shall be folded downward so that the completely folded skirt measures approximately 16-1/2 inches by 12 inches.

5.1.1.2 Intermediate packing. Ten skirts of one size only, folded as specified in 5.1.1.1, shall be packed ten in depth and alternated end for end within an intermediate fiberboard box conforming to style FTC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. Inside dimensions of the box shall be approximately 16-3/4 inches in length, 12-1/4 inches in width, and 5 inches in depth. Two ounces of naphthalene flakes shall be uniformly distributed throughout the contents of each box, except when skirts are made from cloth pretreated with a moth repellent. Box closure shall be secured with 2-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45 applied at the center of the length opening and extending along the bottom and up the sides at least 3 inches.

* 5.1.2 Commercial. Skirts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. Thirty skirts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat three in depth within a shipping container. Inside

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:32Z
Check the source to verify that this is the current version before use.

dimensions of each shipping container shall be approximately 18-1/4 inches in length, 13-3/4 inches in width, and 16-1/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Inspection shall be in accordance with MIL-STD-1609. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Thirty skirts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat three in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 18-1/4 inches in length, 13-3/4 inches in width, and 16-1/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636. Inspection shall be in accordance with MIL-STD-1609.

5.2.2.1 Weather-resistant shipping containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with MIL-STD-1609.

* 5.2.3 Commercial packing. Skirts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), skirts, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 7 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, intermediate packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The skirt is a component of the field uniform worn by the female personnel of the Department of the Army.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size required (see 1.2).
c. When a first article is required (see 3.2, 4.3, and 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

* 6.3 Standard sample. For access to samples, address the contracting activity issuing the invitation for bids.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

* 6.5 Subject term (key word) listing.

Clothing
Skirt
Uniform

6.6 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

Project No. 8410-A655

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:32Z
Check the source to verify that this is the currentversion before use.


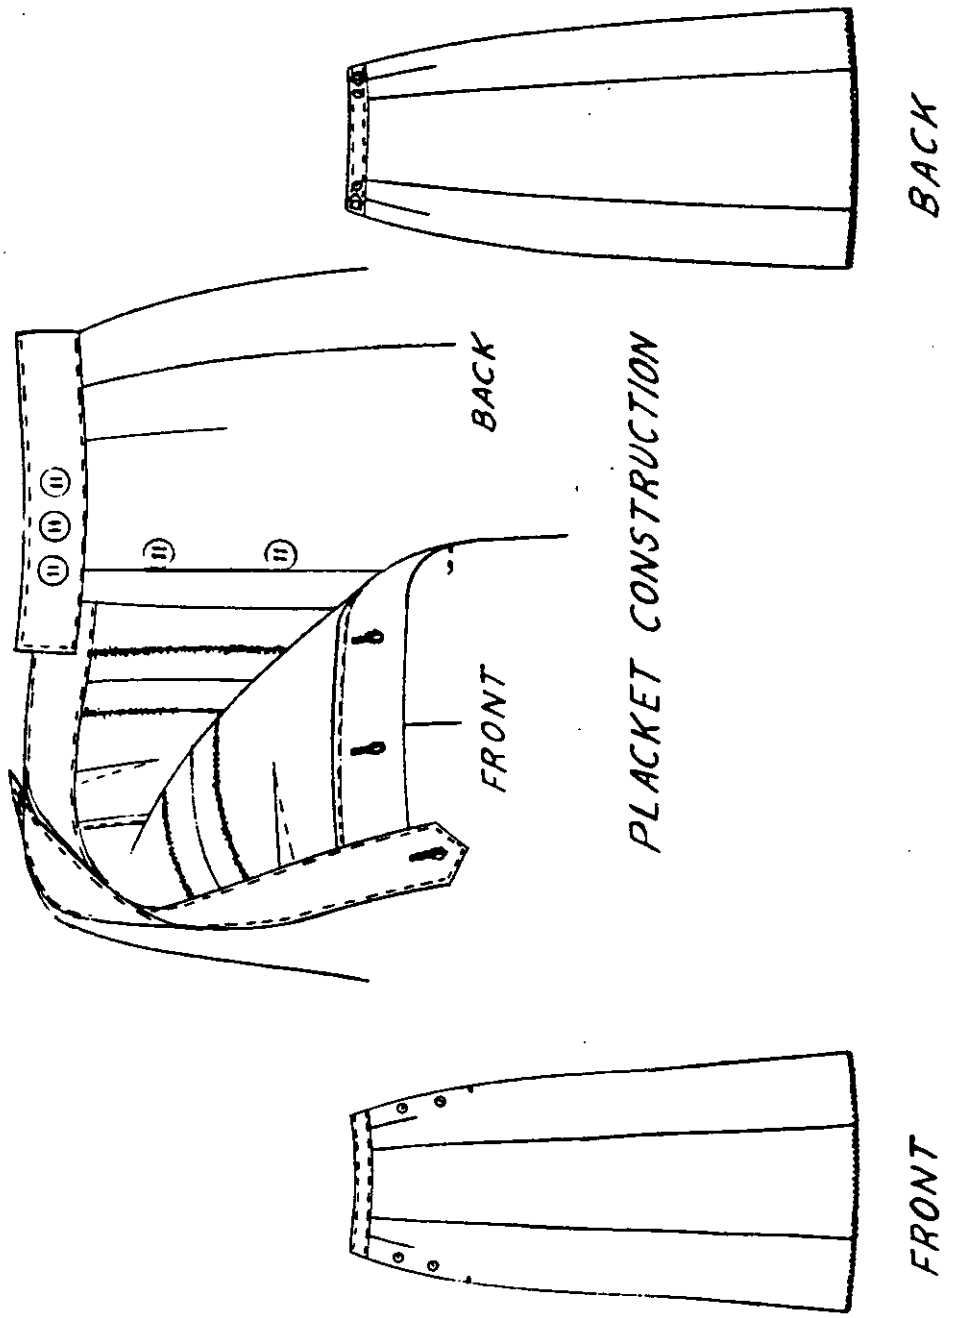


FIGURE 1. Skirt, woman's, wool, field.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:32Z
Check the source to verify that this is the current version before use.

Stitch Class 800. - This class of stitch shall be formed with one or more needle threads and has for a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. This class of stitch simulates hand stitching.

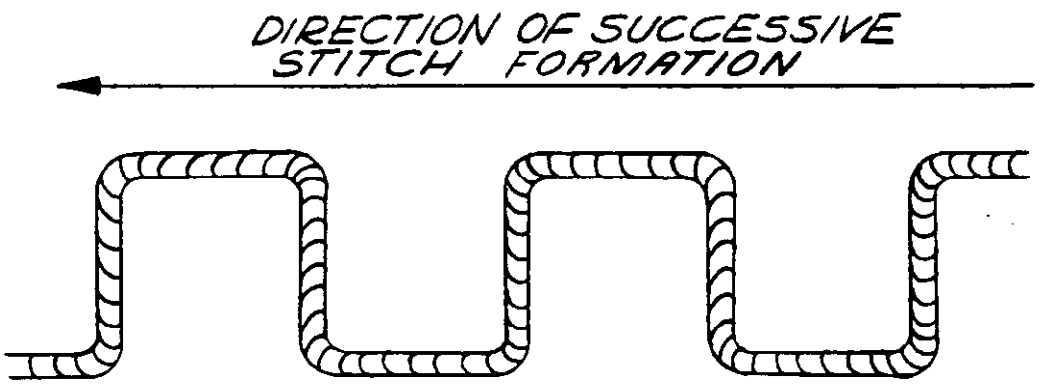

This type of stitch shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE 2. Stitch type 801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any *remarks not related to a specific paragraph of the document.* If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-43488C(GL)	Skirt, Woman's, Wool, Field

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:32Z
Check the source to verify that this is the current version before use.