The documentation and process conversion measures necessary to comply with this amendment shall be completed by 8 August, 2002.

INCH-POUND

MIL-PRF-19500/685
AMENDMENT 2
8 May 2002
SUPERSEDING
AMENDMENT 1
16 August 2001

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, FIELD EFFECT, RADIATION HARDENED
TRANSISTOR, N-CHANNEL SILICON TYPES 2N7475T1, 2N7476T1 AND 2N7477T1
(TOTAL DOSE AND SINGLE EVENT EFFECTS)
JANTXVR AND JANSR

This amendment forms a part of MIL-PRF-19500/685, dated 6 October 2000, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

*1.3, column P_T (1) T_A = +25°C, delete “(1)”.

PAGE 7

TABLE I, subgroup 2, thermal impedance, min limits column, delete "0.40" and add "0.45" in max limit column.

PAGE 8

TABLE I, subgroup 4, forward transconductance, 2N7475T1, min limits column, delete "45" and substitute "39".

TABLE I, subgroup 4, forward transconductance, 2N7476T1, min limits column, delete "40" and substitute "35".

TABLE I, subgroup 4, forward transconductance, 2N7477T1, min limits column, delete "30" and substitute "27".

PAGE 12

TABLE III, subgroup 2, gate to source voltage (threshold), conditions column, delete “V_{DS} V_{GS}“ and substitute “$V_{DS} \geq V_{GS}$”.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:51Z
Check the source to verify that this is the current version before use.

TABLE III, subgroup 2, static drain to source on-state voltage, delete and substitute:

"

Static drain to source on-state voltage	3405	V_{GS} = 12 V; condition A Pulsed (see 4.5.1)	$V_{DS(on)}$						
2N7475T1		ID = 45			0.675		0.675	V dc	
2N7476T1		ID = 35			1.365		1.365	V dc	
2N7477T1		ID = 26			1.586		1.586	V dc	

"

TABLE III, subgroup 2, forward voltage source drain diode, delete and substitute:

"

Forward voltage source drain diode	4011	V_{GS} = 0 V, $I_D = I_{D1}$ Bias condition C	V_{SD}						
2N7475T1		ID = 45			1.2		1.2	V dc	
2N7476T1		ID = 45			1.2		1.2	V dc	
2N7477T1		ID = 40			1.2		1.2	V dc	

"

PAGE 13

FIGURE 3, delete and substitute:

"

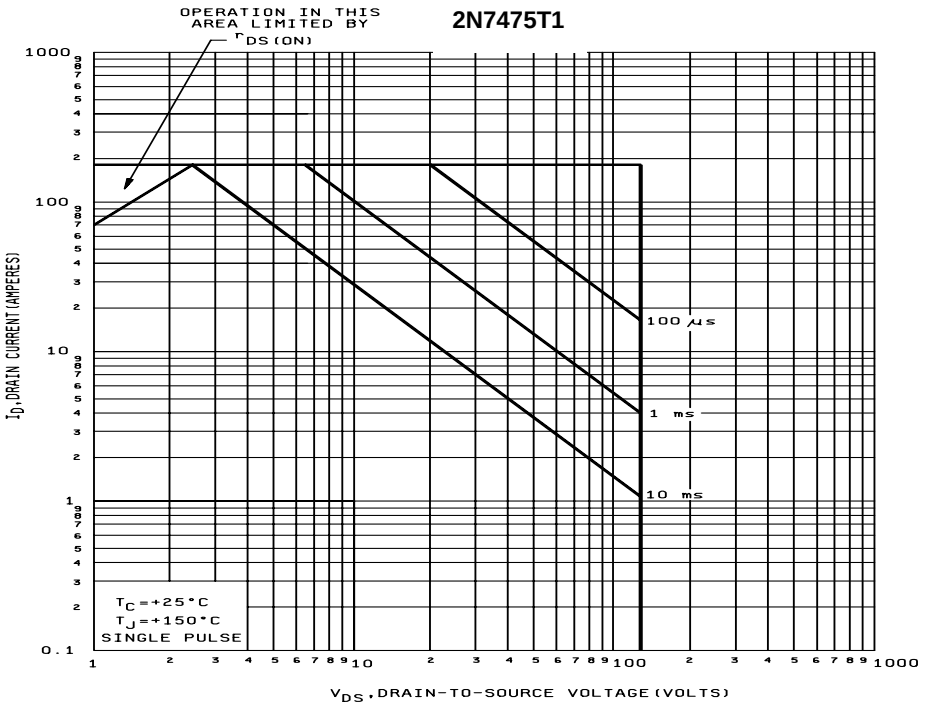

FIGURE 3. Safe operating area graph."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:51Z
Check the source to verify that this is the current version before use.

FIGURE 4, delete and substitute:

"

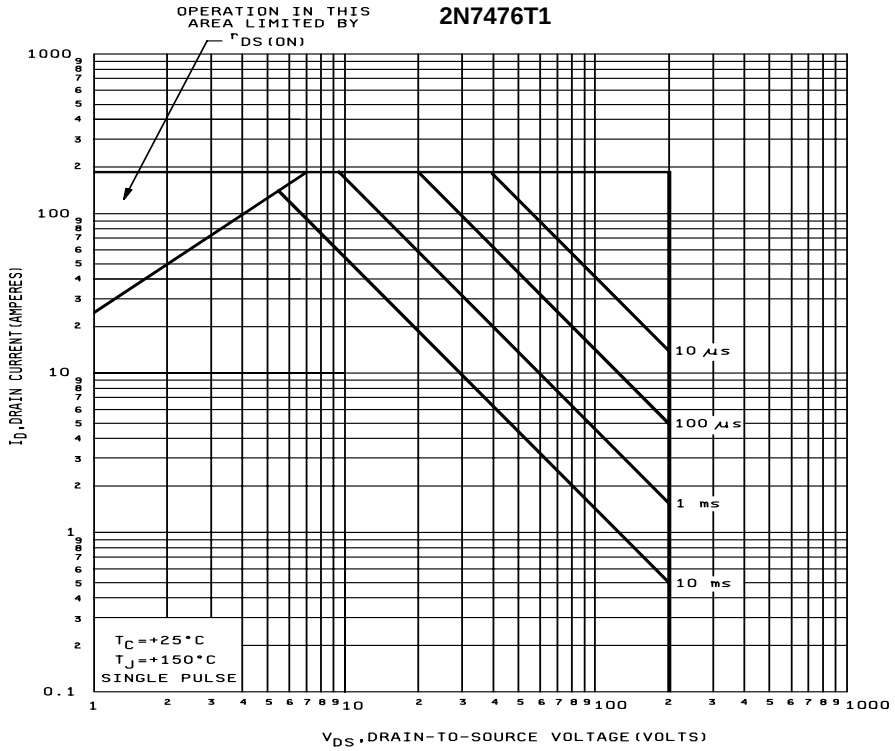

FIGURE 4. Safe operating area graph."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:51Z
Check the source to verify that this is the current version before use.

FIGURE 5, delete and substitute:

"

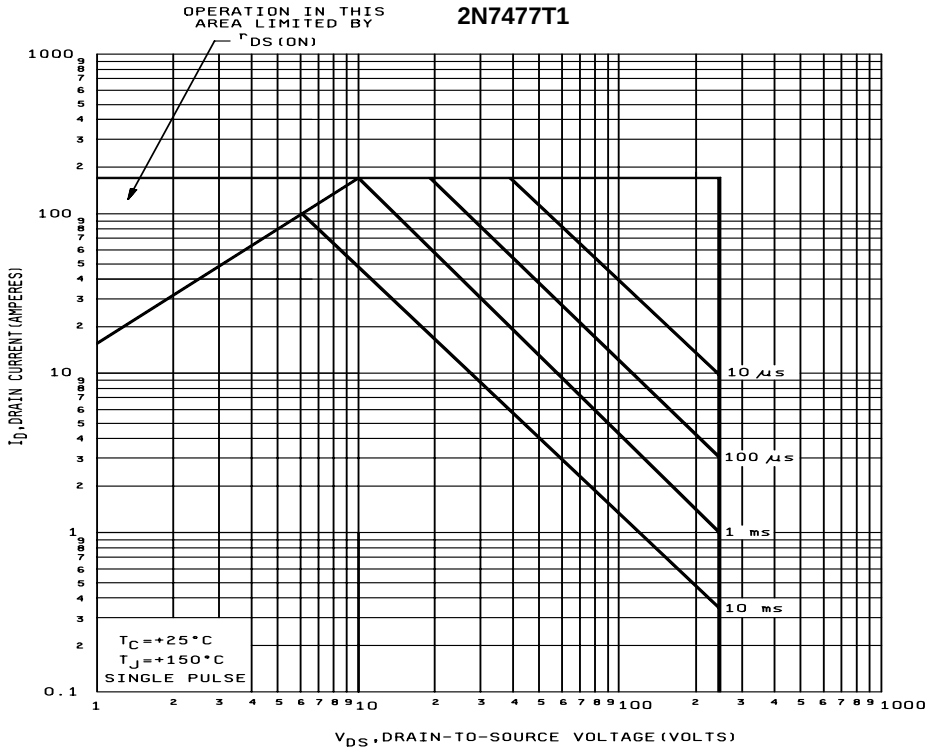

FIGURE 5. Safe operating area graph."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:51Z
Check the source to verify that this is the current version before use.

PAGE 16

4.5.2.b, delete "13.33 A" and substitute "11.11 A".

4.5.2.d, delete "15 V" and substitute "12 V".

4.5.3.b, delete "13.33 A" and substitute "11.11 A".

4.5.3.d, delete "15 V" and substitute "12 V".

PAGE 17

6.4, Cross reference list, delete and substitute:

Generic P/N	Military P/N
IRHMS57163SE	2N7475T1
IRHMS57260SE	2N7476T1
IRHMS57264SE	2N7477T1

The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Air Force - 71, 99

Preparing activity:
DLA - CC

(Project 5961-2587)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:51Z
Check the source to verify that this is the current version before use.